

# INTERNATIONAL SEARCH REPORT

International application No.  
PCT/US99/24868

## A. CLASSIFICATION OF SUBJECT MATTER

IPC(6) :H04 B 1/06

US CL :455/66, 344; 358/350

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 455/66, 575, 90, 344, 347, 351; 358/350, 351

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

NONE

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

NONE

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5,272,638 A (MARTIN ET AL) 21 DECEMBER 1993, see figures 1-4, see column 2, line 65 to column 5, line 19.	1-14
A	US 5,225,638 A (THOMPSON) 06 JULY 1993, see figures 1-2, see columns 2, lines 30-52.	1-14

☐ Further documents are listed in the continuation of Box C.

☐ See patent family annex.

* Special categories of cited documents:	"T"	later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A" document defining the general state of the art which is not considered to be of particular relevance	"X"	document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"E" earlier document published on or after the international filing date	"Y"	document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"&"	document member of the same patent family
"O" document referring to an oral disclosure, use, exhibition or other means		
"P" document published prior to the international filing date but later than the priority date claimed		

Date of the actual completion of the international search

29 JANUARY 2000

Date of mailing of the international search report

11 FEB 2000

Name and mailing address of the ISA/US  
Commissioner of Patents and Trademarks  
Box PCT  
Washington, D.C. 20231

Facsimile No. (703) 305-3230

Authorized officer

THANH LE

Telephone No.

*James R. Matthews*  
(703) 305-4819

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : <b>H04B 1/06</b>		A1	(11) International Publication Number: <b>WO 00/24131</b>
			(43) International Publication Date: 27 April 2000 (27.04.00)
(21) International Application Number: <b>PCT/US99/24868</b>		(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).	
(22) International Filing Date: 21 October 1999 (21.10.99)			
(30) Priority Data: 60/105,050 21 October 1998 (21.10.98) US			
(71) Applicant (for all designated States except US): AMERICAN CALCAR, INC. [US/US]; 3511 Silverside Road, Wilmington, DE 19810 (US).			
(72) Inventor; and (75) Inventor/Applicant (for US only): OBRADOVICH, Michael, L. [US/US]; 1904 Avenida Salvatore, San Clemente, CA 92672 (US).			
(74) Agent: CAVANAGH, Daniel, M.; Christie, Parker & Hale, LLP, P.O. Box 7068, Pasadena, CA 91109-7068 (US).		Published With international search report.	

(54) Title: POSITIONAL CAMERA AND GPS DATA INTERCHANGE DEVICE

(57) Abstract

A location tagged data provision and display system. A personal communication device (PCD) with electromagnetic communication capability has a GPS receiver and a display. The PCD requests maps and location tagged data from data providers and other for display on the PCD. The data providers respond to requests by using searching and sorting schemes to interrogate data bases and then automatically transmitting data responsive to the requests to the requesting PCD.

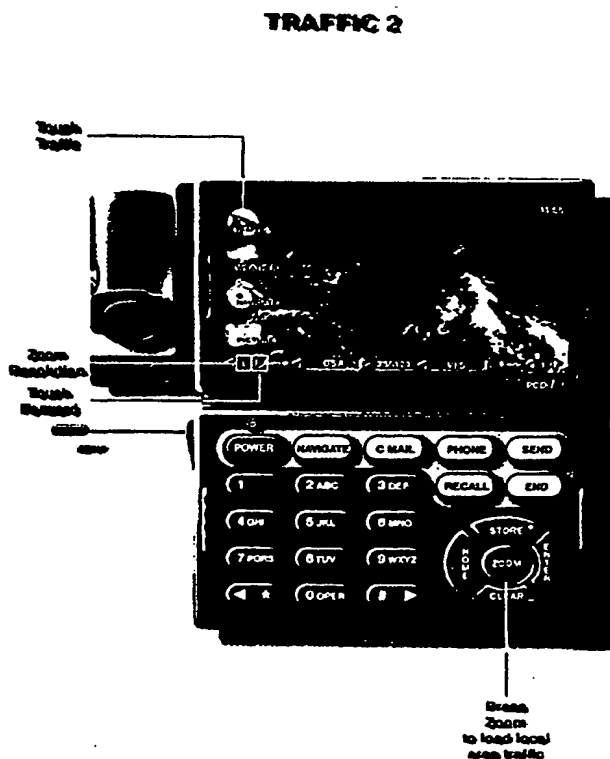

Best Available Copy

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

## 1 POSITIONAL CAMERA AND GPS DATA INTERCHANGE DEVICE

## FIELD OF THE INVENTION

5 The invention relates generally to a system for communicating data including global-positioning-encoded information. In particular, the present invention relates specifically to a device and system for communicating and retrieving position and position related data.

## BACKGROUND OF THE INVENTION

10 Availability of up-to-date information is more important today than ever before and this will continue to be true for the foreseeable future. People want to be well informed, so much so that they travel with cellular phones, beepers, and even portable hand-held Global Positioning System (GPS) satellite receivers.

15 GPS capable devices generally have a GPS receiver for receiving satellite signals from the GPS satellite network that allow for determination of the device's position. Such devices allow for precisely locating the device in terms of latitude and longitude using the GPS receiver. Some devices have map data stored in memory and a display for showing the device position with reference to the map data. Other devices have no underlying map data base for reference. Rather, they show only the geographic coordinates of the device's location. These coordinates may be referred to as waypoints. Most GPS receiver devices can store many waypoints. Some  
20 GPS receiver devices can plot and display a trail of waypoints and store this trail for future retrieval. Sophisticated devices may compute the device's heading, speed, and other information based on comparisons with previous GPS determined positions.

25 GPS receiver devices with map display capability may store the map information on computer diskettes, CD-ROM's, or other computer memory storage devices. The device location may then be displayed on a display terminal with reference to a map stored in the computer memory storage device. The available quantity of map data, however, can overwhelm the memory capability of easily portable computer devices. This problem is exacerbated when additional information is included and linked with the map data. In addition, information is more valuable when it is up to date and available at the time of consumption, and such devices do not  
30 incorporate a means for updating the stored information. By way of example, a CD ROM could never maintain an up-to-date list of every 5-star restaurant.

35 Some GPS receiver devices have the ability to communicate over a telecommunications network. These devices do not provide for automatic or semi-automatic dynamic exchange of on-line position dependent or related information. In addition, these devices cannot communicate with third parties in the absence of a uniform data format standard. For example, a cellular-phone-based system comprising GPS location information working in conjunction with proprietary Public Safety Answering Point (PSAP) telephone equipment is known. The device provides personal and medical information on an emergency basis to the proper authorities. Such

1 a device does not allow third parties to communicate, tag, interrogate, limit, designate, modify or share this information amongst themselves for any other use.

To that end, the ability to receive digital data structures with GPS encoding, and storing this information for eventual use or broadcast to third parties, would be valuable. Today, the U.S.  
5 and several other countries have independent publishers busily GPS mapping everything down to the most minute detail. Most of these data bases are available on CD ROM storage. The problem is that no one data base can contain enough information to fulfill the unique requests of every particular and picky consumer. The costs associated with providing and maintaining such a large data base would be overwhelming and over-burdening. Additionally, most consumers do  
10 not like reading or compiling vast data bases.

#### SUMMARY OF THE INVENTION

The system of the present invention utilizes Personal Communications Devices (PCDs), and traditional computer systems with GPS engines, routers, and other application programs to  
15 request, process, and transmit tagged GPS encoded information. The system, with related applications, can be accessed by device users, traditional computer users, web-site users (cyberspace), data publishers, public or private enterprises or individuals, by means of application programs. The tagged GPS encoded data files can be stored or sent via communication links using AM, FM, spread spectrum, microwave, laser or light beam in free or fiber optic,  
20 line-of-sight, reflected, satellite, secure or non-secure, or any type of communications between multiple points that the application or the state-of-the-art may allow. The system is a waypoint tag and interrogation system using various protocols to answer requests and provide GPS-encoded information. The applications use GPS devices, engines, routing and encoding for access to specific requester-designated data retrieval requests. The applications access fax  
25 machines, beepers, telephones and other communication linked devices. The system accesses computer and storage systems with various applications in order to provide this information from a plurality of providers. The system thereby eliminates or reduces the need for large storage devices and interchangeable storage modules.

One embodiment of the present invention includes a requesting device, a data provider  
30 (hardware and software), a user, tagger applications or GPS engine and router system with protocols for encoding, tagging, modifying, interrogating, arranging, limiting, displaying, sorting, mapping, segregating, sending, receiving and updating waypoint and the waypoints connected data structures with digital or graphic maps, digital voice files, linked digital web files properly encoded and tagged by way of specific devices, or by traditional computer and storage systems.

35 The application programs contain protocols for users, providers, taggers, list maintenance organizations, and others, and will use a dynamic identification system from applications containing GPS search engines, route planners, compilers, designators, publishers, and others to permit communication of information.

1       The PCD is a cellular-phone-sized electronic device, combining the capabilities of a GPS  
receiver, transceiver, digital beeper, cell phone and projection system into one compact unit. The  
PCD is capable of uploading emergency information (medical, police alert, etc.) via a one-push  
button that phones 911 or a security monitoring center similar to those used for house alarms.  
5       The alert continues to be broadcast until a response is made.

      The PCD is also capable of downloading information via a request to a data provider,  
similar to a request for directory information from a phone company or other service. In this  
mode the PCD acts similar to calling a phone operator for information. However, in this  
instance, no human contact is required. The caller requests specific information (location of gas  
10       stations, names of restaurants, local banks, etc.) via a voice command ("Download e.g., Wells  
Fargo Banks") or via digital commands using a keypad or other input device and the requested  
information is automatically downloaded to and stored in the memory of the user's PCD. This  
information can be accessed off-line via the screen on the PCD. It is all done digitally,  
eliminating having to write down information such as name, address, location map, GPS latitude  
15       and longitude encoding, direction and distance to location, hours of operation, or other items of  
information. The PCD can be plugged into an automobile input port or similar device, if  
available, and provide distances and directions to locations of interest. Similar information of  
a condensed nature can also be provided to the user via the screen of the PCD. The user is not  
required to be a subscriber to some proprietary system, instead the PCD can use any means to  
20       access any data base from any potential provider, whether GPS encoded or not.

      In some areas the information would be sent and received by way of a Local Area  
Broadcast via radio frequency signals to each home, car or PCD within a reception area. In such  
an embodiment, users are able to access companies listed on the broadcast network from data  
providers of properly tagged, yellow page-type information or are provided with GPS encoded  
25       information and maps similar to web page listings. This would be advantageous to small towns  
with little information available for travelers, but which have an interest in providing up-to-date  
traffic, weather and travel advisories to benefit the local community and businesses. Such a  
system does not require a master, home or base unit. The providers of data base or advertising  
information could be a single data provider and could also be individual users with application  
30       programs that allow provision of such data. The application programs provide a means for  
sending and receiving data, GPS encoded data and graphics encoded data. The application  
programs can also act as a universal coder/decoder to other proprietary GPS data bases.

      The present invention allows users to request detailed information relating to their present  
location as well as information related to distant locales. Some of the advantages provided by  
35       the invention include:

1. Information can be received digitally by a PCD user from any system.
2. Multiple requests can be retained, stored or resent.
3. In-depth dynamic data retrievals are possible and could be viewed later.

1           4. GPS tagging and encoding with latitude and longitude information along with encoded maps for navigation.

          5. Small non-contiguous map segments are possible.

5           6. On-line storage of data personal and other information, along with GPS encoded maps on some data files.

          7. Display menus, interfaces and applications can be viewed on heads-up display systems in automobiles, homes, businesses and various commercial applications.

          8. Allows for portable Internet access.

10          9. Provides a means for an Internet based telephone directory access tagged and linked to the originating area code and phone numbers.

          Remote and distant third parties could communicate with each other and, by sending and receiving GPS encoded data, can meet or find each other in remote locations. Maps and other digital data may be transmitted/received by fax, beeper (receive only), computer, phone and radio.

15          The system also utilizes a system of non-subscribers communicating to each other in a similar fashion, without the use of base stations. In addition, the non-subscribers could send personal data bases with maps included, GPS information, and other information of non-related data or graphics from publishers of any such data base. In this embodiment the device would act as a transceiver, sending and receiving dynamic moving waypoint information in digital formats, including maps of various sizes and embodiments.

20          The PCD can display a singular or a plurality of images and displays, project an image on to a screen or viewing surface, store or communicate data (depicted as a line, graphic, icon, etc.) to and/or receive latitude and longitude data from third parties. Additionally, the device can send/receive latitude- and longitude-encoded maps and other data to/from a third party, send/receive standard or non-standard phone and fax communications (AM, FM, spread spectrum, microwave, laser or light beam in free or fiber optic, line of sight, reflected, satellite, secure or non-secure, or any type of communications between two points that the application or state-of-the-art may allow), perform computer functions from existing application software and operating systems, receive standard or non-standard beeper messages, interface with a conventional computer and provide an interface to a heads-up display, an external viewing device or any projection system.

30          An embodiment of this invention incorporates a GPS transceiver with a designated application used with a communication system or network. Several users can communicate and send data, maps and graphic files with or without GPS encoding. By example, a user could request from sensing, weather, or condition reporting devices details concerning remote locations. These sensing, weather, and condition reporting devices may also be accessible over cable land lines or other communication media.

1 In one embodiment of the device and tagging system information is communicated from  
locations, homes, businesses, commercial designations, government resources, public and private  
areas, cyberspace and other communication systems. Various designated locations, or a plurality  
and multiplicity of locations, or data structures, are assigned as waypoints. These waypoints  
5 could be tagged, or interrogated from an application program which describes, encodes, reports,  
modifies and communicates this encoded information and data from any location. In addition,  
the transmitting device may report a plurality and multiplicity of locations or events unrelated to  
either the location of either the transmitting or receiving device. Indeed, the device could  
communicate to many unlinked, unreported or unconnected waypoints and send active dynamic  
10 information to the requester. Cyberspace providers may enter the network web system, use  
applications for device communications and participate in the exchange of information using  
designated GPS engines and applications. By way of example, the invention can provide a  
requester with dynamic location information, or other data to a location anywhere in the U.S.  
This location information may be used to locate individuals in determining whether to authorize  
15 credit requests, whether PCD or item containing a PCD, such as an automobile, is moved, or in  
routing electronic communications.

The system is similar to the world wide web, except the web does not use GPS engines,  
applications, tagging systems, etc. By way of example, one difference is that the invention uses  
GPS devices, engines, applications and encoding for access to specific requester designated data  
20 retrieval techniques. Indeed, the invention provides a means to locate specific individuals both  
physically and in terms of an electronically accessible location.

Another advantage the invention provides is a means to display this type of  
information and a means to store data unrelated to any interrogation by the PCD device. Methods  
of display include multiple of displays including, by example, overhead displays, heads-up  
25 displays, projection systems, LCD displays, computer displays or any past or future designed  
displays whether connected directly or by some electromagnetic means. The preferred  
embodiment of the device could include any means of display or combinations thereof. In  
addition, the device could include many control devices such as remote control, remote mouse  
type devices and any combination of keyboards.

30 Further objects, features and advantages of the invention will become apparent from the  
following detailed description taken in conjunction with the accompanying drawings showing  
an illustrative embodiment of the invention in which like parts are designated by like reference  
numerals throughout.

## 1 DESCRIPTION OF THE DRAWINGS

FIG. 1 illustrates a GPS transceiver system and communication links incorporating the present invention;

5 FIG. 2 is a front perspective view of a PCD of the present invention showing a layout of controls and an initialization screen;

FIG. 3 is a rear view of the PCD of FIG. 2;

FIG. 4 is a block diagram of the PCD of FIG. 2;

FIG. 4A shows a screen menu hierarchy of the PCD of FIG. 2;

10 FIG. 5A illustrates a flow chart depicting the program sequence for the entry of a personal identification number (PIN) and personal data into the PCD of FIG. 2

FIG. 5B illustrates a flow chart depicting the program sequence for the user to select a mode of operation using the PCD of FIG. 2;

FIG. 5C illustrates a flow chart depicting the program sequence for the user to control the GPS mode of the PCD of FIG. 2;

15 FIG. 5D illustrates a flow chart depicting the program sequence for the user to control the phone mode of the PCD of FIG. 2;

FIG. 5E illustrates a flow chart depicting the program sequence for the user to control the computer mode of the PCD of FIG. 2;

20 FIG. 5F illustrates a flow chart depicting the program sequence for the user to control the radio mode of the PCD of FIG. 2;

FIG. 6 illustrates the Main Menu page of the PCD of FIG. 2;

FIG. 7 illustrates the select GPS Function page of the PCD of FIG. 2;

FIG. 8 illustrates the GPS: Location page of the PCD of FIG. 2;

FIG. 9 illustrates the GPS: Show Me page of the PCD of FIG. 2;

25 FIG. 10 illustrates the GPS: Get Map page of the PCD of FIG. 2;

FIG. 11 illustrates the GPS: Third Party page of the PCD of FIG. 2;

FIG. 12 illustrates the FAX page of the PCD of FIG. 2;

FIG. 13 illustrates the Beeper page of the PCD of FIG. 2;

FIG. 14 illustrates the Phone page of the PCD of FIG. 2;

30 FIG. 15 illustrates an Information Request page of the PCD of FIG. 2;

FIG. 16 illustrates the Computer page of the PCD of FIG. 2;

FIG. 17 illustrates the Radio page of the PCD of FIG. 2;

FIG. 18 illustrates the Receive Queue page of the PCD of FIG. 2;

FIG. 19 illustrates the Send Queue page of the PCD of FIG. 2;

35 FIG. 20 illustrates a typical listing downloaded from a data provider;

FIG. 21 illustrates a typical GPS encoded map downloaded from a data provider;

FIG. 22 illustrates a typical GPS encoded map with waypoints locating restaurants within a specified radius;

1           FIG. 23A illustrates an exemplary data provider;  
          FIG. 23B illustrates an exemplary configuration of a non-PCD computer utilizing a  
modified application module;  
          FIG. 24 illustrates a software module configuration of a requester;  
5           FIG. 25 illustrates a software module configuration of a provider;  
          FIG. 26 illustrates a software module configuration of the application module;  
          FIG. 27 illustrates a software module configuration of the tagging system;  
          FIG. 28 illustrates a software module configuration of the GPS engine;  
          FIG. 29 illustrates a software module configuration of the universal translator;  
10           FIG. 30 illustrates a typical configuration of the service provider;  
          FIG. 31 illustrates a possible configuration of the digital web TV;  
          FIG. 32 illustrates the Weather Map Request page of the PCD of FIG. 2;  
          FIG. 33 illustrates a weather reporting device;  
          FIG. 34 illustrates a block diagram of the condition reporting device of the present  
15 invention;  
          FIG. 35 illustrates several condition reporting devices of FIG. 34 deployed along an  
arterial route;  
          FIG. 36 illustrates a block diagram of a cable television distribution system for condition  
reporting devices of the present invention;  
20           FIG. 37 illustrates a process for using route information to obtain information concerning  
the availability of condition reporting devices;  
          FIG. 38 illustrates a PCD displaying a trail plot with condition reporting device locations;  
          FIG. 39 illustrates a process of a manual method of obtaining condition reporting device  
information;  
25           FIG. 40 illustrates a PCD display showing information received from a condition  
reporting device;  
          FIG. 41 illustrates a process of the automatic handoff method for obtaining condition  
reporting device information;  
          FIG. 42 illustrates a process of the automatic sequence method for obtaining condition  
30 reporting device information;  
          FIG. 43 illustrates a display of a PCD display showing a user's route comprised of  
multiple segments;  
          FIG. 44 illustrates a block diagram of a local area transmission system for providing  
multimedia information;  
35           FIG. 45 illustrates a process of obtaining cell site based information;  
          FIG. 46 illustrates a process of credit authorization;  
          FIG. 47 illustrates a process of determining alternative route travel times.  
          FIG. 48A-H illustrate an alternate embodiment of a PCD of the present invention; and

FIGs 49A-G illustrate the alternate embodiment of a PCD of FIGs 48A-H.

#### DETAILED DESCRIPTION OF THE INVENTION

FIG. 1 shows a system capable of communicating using the electromagnetic energy spectrum, traditional computer networks, cellular phone networks, public telephone networks, and satellite system networks. The major components of the system comprises personal communication devices (PCDs) 20 and one or more of the following: a cellular phone network 60, a standard phone line network 70, an electromagnetic energy spectrum network 80 and/or a computer network 90. The PCD receives signals from a GPS satellite system 10.

FIG. 2 illustrates a PCD of the present invention. The PCD has a display 28a. The display may be of a LCD type or other types known in the art. Incorporated with the display is a touch screen input device 28b, which are known in the art. The PCD also has a alphanumeric key pad 26, which includes many of the standard keys generally found on computer keyboards. The location of the keys, and the selection of the characters used on a single key, may be varied as desired. The PCD also has specialized keys 27a-g, n related to GPS, telecommunications, and other functions. Located on one side of the PCD are a number of input and output ports. In the embodiment shown, these ports include a modem output port 29g, a generalized communication port 29f, a power port 35b, an infrared port 29e, and a heads-up display interface port 25k. The location of these ports are shown for descriptive purposes only, the specific location of these ports on the PCD is not critical. The power port allows the PCD to be operated from an external power source (not shown). The communication port allows the PCD to be connected to printers, local computer networks, and the like.

FIG. 3 shows a rear view of the PCD of FIG. 2. The rear of the PCD contains a microphone 34 towards one edge of the rear of the PCD and a speaker 33 towards the opposing edge. The layout of the microphone and the speaker is similar to that found in portable cellular telephones. An antenna 32 extends from the edge near the speaker to allow for communication in a cellular telephone network or via other electromagnetic spectrum means. The PCD contains a battery 38a. The battery allows for mobile operation of the PCD and is the selected power source if an external power source is not available through the power port. The PCD's operation is governed by a processor 21. A variety of microprocessors may be used, with the selection of such determined by processing power, power utilization, and other factors and requirements. The PCD has a slot 23 for a PCMCIA card, CD-ROM, or other computer accessory. The PCD is powered on when the power button 31 (shown in FIG. 2) is depressed. In the embodiment shown, at initial device power on, the processor causes the PCD to display the initialization screen 100 (shown in FIG. 2).

FIG. 4 shows a block diagram of the PCD. Control and logic functions are performed by the processor 21. Internal data storage 22, which is provided by conventional memory such as

1 RAM or ROM or variations thereof, may be accessed by the processor. The processor may also  
access removable data storage devices 23 such as a hard disk installed via the PCMCIA slot, a  
CD-ROM type device or other similar removable data storage devices. The processor is  
connected by a data bus 24 to a number of devices. These include the alphanumeric key pad and  
5 other special purpose keys, the touch screen, and other hard wired input devices. The heads-up  
display output port and the display screen are also connected via the data bus to the processor,  
it being recognized that a number of display related devices such as VGA cards, chips, and the  
like are also required to implement the display device functions and the other previously  
mentioned functions. The microprocessor may also access or control communications with  
10 telephone networks, either hardwired or cellular, radio transmissions, infra-red transmissions, or  
communications with other computer devices.

All known verbal commands from GPS systems can be implemented and attachment or  
inclusion of voice activation for map instructions relative to location, GPS and street  
designations, including heading descriptions, distance, and arrival time estimates can be included.

15 FIG. 24 illustrates a block diagram of the PCD's software components. An application  
module or program 51 interfaces with the PCD's operating system 241. The operating system  
may be DOS, UNIX, Windows 95, Windows NT, O/S2 Apple McIntosh, Next Computer, or  
other operating systems, including operating systems well suited to devices with constrained  
memory or other limitations due to the small physical size of the PCD. The operating system  
20 additionally interfaces with other application programs 242 that provide standard file edit and  
other functions typically found in personal computers. The operating system, or other application  
programs interfacing with the operating system, provide for maintenance of data bases 245 used  
by the PCD. The application module includes a GPS engine 53 providing GPS functions,  
including interfacing with the GPS receiver 243 (shown in FIG. 4). A query menu program 54  
25 of the application module controls the graphical user interface and related functions for the  
device. Included in the application module is a universal converter 55.

As illustrated in FIG. 29, the universal converter enables the PCD to read in data provided  
by third parties 291a, b and convert or filter such data to a format useable by the PCD. The  
universal converter first inspects the received data to determine if the data is in a known format  
30 which can be converted to the format used by the PCD. If the format is not known by the device,  
the universal converter attempts to extract any ASCII data or format the data as a bit map as  
appropriate.

As illustrated in FIG. 26, the application module further includes programs to implement  
data formatting and communication protocols using header protocols 271, layer protocols 272,  
35 and data provider protocols 273. The application module also includes a tagging system interface  
program 274. The elements of the tagging system are illustrated in FIG. 27. The purpose of the  
tagging system is to provide a common universal data structure for requests and responding to  
requests. Various techniques common in the GEO coding industry, using U.S. Census bureau

1 data and tiger files with certain modifications, can establish parameters for software suppliers to use latitude and longitude encoding as coordinate pairs, postal code encoding and street centering encoding, all for the benefit of accuracy in designating certain files as "tagged". The tagging system provides the ability to apply and strip header and layer information to and from data files.

5 FIG. 4A shows the top level page menu display hierarchy of the PCD. At initial power on the initialization page 25a (shown in FIG. 2) is displayed. The initialization page allows for the entry of a personal identification number and other data. Depressing the home button 27E (shown in FIG. 2) displays the Main Menu page 25b. A number of additional pages are available from the Main Menu page. These include the GPS 25c, Fax 25d, Beeper 25e, Phone 25f, Computer 25g, Radio 25h, Send Queue 25i, and Receive Queue 25j pages.

10 FIG. 5A lists a sequence for the operator of the PCD to answer certain questions, provide information for future access regarding handling of emergency events and handling of same by civil authorities or private individuals empowered to act on behalf of the operator. Access is denied or provided based upon user codes. The entry of a user code may allow for limited to full access of the data stored in the device and usage of same with different codes providing different levels of access and usage. Similar information and sequencing is provided by the application modules and operating system for medical and other information in the event of emergencies. In one embodiment of the preferences screen (not shown) information can be displayed in a specified manner, events recorded and equipment options listed. Specific usage of the device and furnished software would be recalled by each user having access and user codes to operate the PCD, each user having unique individual screens and setups based on that user's preferences. The initial setup of screen preferences and other user configuration details are well known in the art.

25 Selecting PIN 111 from the Main Menu page displays a screen 113 prompting the user to input a personal identification number. Using an alphanumeric key pad 26, the user inputs a personal identification number and presses ENTER 27g. The processor analyzes the entered personal identification number and determines if the number is valid 115 FIG. If the entered personal identification number is valid the processor enables PERSONAL 121, MEDICAL 131, PREFERENCES 141 touch points on the display screen. These touchpoints, and touchpoints later referred to, are selectable either by pressing the display screen at the touchpoint location or by selecting the underlying display item with the cursor. If the PCD already contains personal, medical and preference data, the HOME button 27e is enabled. If the personal identification number is not valid, the processor 21 will increase the device security level 119. This may include, but is not limited to, disabling the PCD operation for a specified time. Selecting PERSONAL 121, MEDICAL 131 or PREFERENCES 141 touchpoints displays the corresponding pages 123, 133, or 143. These pages request specific data, and allow the user to input data using alphanumeric key pad 26. Completion of data entry is indicated by pressing the ENTER button 27g.

1 In addition, the Initialization page 100 FIG. 2, as well as all other pages, displays the time  
and the date 103, touch points for QUE IN 550 and OUT 600 (described later in this document)  
and limited GPS information 107. The limited GPS information comprises of the user's location  
(latitude and longitude), an arrow pointing to north and an arrow indicating direction of device  
5 travel.

When enabled, pressing the HOME button 27e (FIG. 2) signals the processor to display  
the Main Menu page 150 FIG. 5B. As shown in FIG. 6, the Main Menu page allows the operator  
to use the touch screen to select the GPS 200, FAX 300, BEEPER 350, PHONE 400,  
COMPUTER 450, RADIO 500, RECEIVE QUE 550 and SEND QUE 600 touchpoints. The  
10 heading and directional information are displayed in real time and are dynamic. Pressing the  
FAX touchpoint causes the processor to display a Fax page (shown in FIG. 12) which lists  
received facsimile messages 301. The Fax page includes display interfaces appropriate for the  
sending and receiving of facsimile communications through the FAX Phone Modem port 29g,  
and such displays and functions are well known in the art. Pressing the BEEPER touchpoint  
15 causes the processor to display a Beeper page (shown in FIG. 13). The Beeper page displays  
received beeper messages 351 and allows for the deletion of such messages from the display and  
internal memory storage. Also, a sub-menu portion of the display 151 is reserved for sub-menus  
and directories.

Pressing GPS 200 causes the processor 21 to display a GPS Function page 201, which is  
20 illustrated in FIG. 7. The GPS page provides for selection of a GPS mode through touch points  
in the sub-menu portion of the display. The available modes are location 210, show me 230, get  
map 250 and third party 270 modes. The display returns to the GPS Function page when the  
PREVIOUS button 27i (shown in FIG. 2) is pressed. The display hierarchy for the GPS functions  
is illustrated in FIG 5C. The Location, Show Me, Get Map, and Third Party pages descend from  
25 the GPS Menu page. The Location page comprises the current map, the location on the map of  
the device, and a plot of the trail of the device on the map. The sub-menu portion of the display  
provides for additional selection of still further pages. These pages include a Menu page, a Mode  
page, a Waypoint page, and a Preferences page.

The Location page is illustrated in FIG. 8. The Location page includes a GPS map 219  
30 (latitude and longitude encoded coordinate pairs). The sample page shown is an encoded map  
showing the device position, plot trail and the encoded map location of the selected waypoint.  
The map displayed could be from on-board memory or sent by other third parties by way of  
communication links to the PCD. When map data files are encoded with location information,  
the location information can be referred to as waypoints. These tagged waypoints, with links to  
35 other data structures, can then be sent to users via an application to various communication  
systems. Closed-loop or proprietary GPS receivers can send/receive data to/from other third  
parties (Brand X, Brand Y) via their own proprietary format using an application system as a  
universal converter. The location information is dynamic and updated periodically by the PCD's

1 communication system via link-up with GPS-based satellites. The Location page indicates the  
PCD position 801, indicated by a walking person, as being located on a highway 810. A  
waypoint 802 is along the highway en route to the desired destination address 803 located on a  
5 local street 804 which intersects the highway. A first point of interest 807 is also displayed as  
being along the highway, as is a second point of interest 805 along a second local road  
intersecting the highway. The limited GPS information, providing location, heading and north,  
is also displayed. The illustrated Location page display shows only one possible combination of  
a map layout. Other display sequences such as North up, course up, user at top of screen, user  
in middle, and other display sequences are possible. The dynamic nature of the PCD allows the  
10 PCD to display GPS encoded maps as the PCD progresses dynamically with relation to the maps.

Using interpolation techniques, performing spatial query analysis, and establishing layers  
for best display scale for any given map record allows the device to provide the user extended  
capability not possessed by traditional GPS devices. Applying various protocols and  
interpolation techniques allow files to be arranged geographically by distance from a designated  
15 point (usually the requesters latitude and longitude as the starting point, but other locations may  
also be used). The maps are also arranged in layers, menus, limited, listed, showed, displayed,  
and sorted.

The Location mode provides typical GPS system functions. The touch points MENU  
213, MODE 215 and WAYPOINT 217 and PREFERENCES 221 provide access to the Menu,  
20 Mode, Waypoint, and Preferences pages. These pages, along with various buttons on the  
alphanumeric key pad 26 FIGS. 2 and 4 and special function buttons 27, are used to configure  
the display to the user's preference. The preferences page 221 enables selection of such features  
as voice, maps, scroll, off screen maps away from cursor and other features. The listing name  
219 portion of the Location page displays information pertaining to a waypoint selected through  
25 the use of the cursor.

FIG. 9 illustrates the Show Me page accessed from the GPS page. The Show Me page  
shows a list of available maps 901a-i stored on-board, which includes maps retrieved from the  
receive queue area of the PCD memory. The user can load a map into the location or third party  
pages by pressing the corresponding number key on alphanumeric key pad 26 (shown in FIG 2)  
30 or by scrolling through the list to highlight the appropriate map and then pressing ENTER button  
27g. Maps may also be removed from on-board storage using the DELETE button 27h.

FIG. 10 illustrates the Get Map page accessed from the GPS Menu page. The user of the  
PCD can request the map by location from PCD memory or an external source. The user may  
enter a desired map location. If a map location is entered, the PCD will only search PCD  
35 memory for a map for the entered location. Maps from an external source are downloaded via  
any of the communication links such as the FAX, BEEPER, PHONE or RADIO touchpoints  
provided in the sub-menu portion of the display 151. Depending on the user's requirements,  
several maps could exist showing similar map areas with different layers for viewing. By way

1 of example, airport maps with air space requirements, coastal waterway, maps, and interstate  
maps, and even hand drawn maps scanned into a computer system all show different resources  
within a given geographic area. These maps, when presented on the PCD, could over-saturate  
the display map detail for any given map area. Therefore, it is preferred that the actual map  
5 displayed be selectable. Maps are retrieved by pressing QUE IN 550, scrolling to highlight the  
desired map, and pressing ENTER 27g FIG. 2.

FIG. 11 illustrates the Third Party page accessed from the GPS menu page. The Third  
Party page provides an interface to communications with a third party through touch points in the  
sub-menu display 151. In the display shown, a user can receive a third party's data and GPS  
10 encoded map for viewing on the device or save it for future usage. The user can also dynamically  
track the third party by periodically having the third party send updates via normal  
communication links. The third party location can be displayed on maps dynamically sent by  
map publishers, maps already on-board (furnished at some earlier date), or on maps sent by the  
third party. The PCD plots and interpolates the GPS data sent by the third party and places an  
15 icon 951 (GPS latitude and longitude coordinate pair) on the displayed map using spatial query  
analysis techniques performed by an application module. The information received from the  
third party may be other than maps or GPS encoded information, but may be information of any  
type. The data is received from the third party using phone 400 and radio communication links  
500. A PREFERENCES touch point 274 enables entry of items such as phone numbers for  
20 automatic call back and time interval for automatic transmission of information. If the radio, a  
satellite phone, or other frequency based communications link is utilized, the PREFERENCES  
touch point allows entry of frequencies for use for automatic transmission of information. A split  
screen displays the user's location on a map on the left side of display 272 and, after contact with  
a third party via a communication link, the third party's map and location on the right side of  
25 display 273. If the third party's location is sufficiently close to the user's location, or if the user's  
displayed map covers a sufficiently large area, both the user's and third party's location can be  
shown on the same map without resort to a split screen display.

The Fax page is accessed by pressing the FAX touchpoint on the Main Menu page.  
FIG. 12 illustrates the Fax page. The sub-menu portion of the display is available for listing  
30 previously stored phone numbers. These phone numbers are selectable as a facsimile destination.  
In addition, the user can directly enter the phone number to indicate the facsimile destination.  
As with other pages, the PCD continues to dynamically display the limited GPS information of  
location, north and heading. The PCD facsimile function is performed by application software  
executed by the processor. Multiple fax locations, time set, send after certain time, and other  
35 traditional functions of fax machines and their implementation are well known in the art. The  
Fax page provides for display of a message (not shown) entered via the alphanumeric key pad  
26 (shown in FIG. 2) or through selection of messages stored in the send queue area of device  
memory. Messages stored in the queue area of PCD memory can be selected by scrolling through

1 a directory 305 of all fax messages stored. To view a stored message the user uses the SCROLL  
button 27a (shown in FIG. 2) to highlight an entry, and then press ENTER button 27g. Pressing  
the SEND button 27b transmits the selected or entered facsimile. The user may also view  
received faxes using this mode by pressing QUE IN 550 Fig 12, using the SCROLL button 27a  
5 to highlight the desired message, and pressing the ENTER button 27g.

The Beeper page is accessed from the Main Menu page. Pressing the BEEPER touch  
point on the Main Menu page causes the processor to display the Beeper page. The device  
contains capabilities consistent with common practices of beepers, also known as pagers, such  
as sending and receiving messages. These functions and their implementation are well known in  
10 the art. The PCD is also satellite communications capable. Beeper messages can be received by  
the PCD without interference to the other device capabilities. Therefore, the user could continue  
using the telephone or other features seemingly uninterrupted by the reception of digital beeper  
messages and display of those messages. The Beeper page provides a list of beeper messages  
(not shown) stored in the receive queue area. Messages stored in the receive queue can be  
15 selected by scrolling through listing 353 FIG. 13 of all beeper messages stored. To view a stored  
message, the user uses the SCROLL button to highlight a desired message and presses the  
ENTER button 27g. Messages are deleted when the DELETE button is pressed with at least one  
message selected.

The Phone page is illustrated in FIG. 14. The Phone page is accessed from the Main  
20 Menu page. Pressing the PHONE touchpoint on the Main Menu page causes the processor to  
display the Phone page. The Phone page is also accessed by pressing the PHONE touchpoint on  
the Get Map and Third Party pages. As with the other pages, the limited GPS data is  
continuously displayed showing PCD location, heading, and north. The PCD can access several  
areas of the display even while the PCD is being used as a telephone. Information provided in  
25 the display area 1401 will vary depending upon the page from which the phone page was  
accessed. The Phone page provides for selection of a function through touch points displayed  
in the sub-menu portion of the display. The selectable touchpoints are: POLICE 403, MEDICAL  
405, DATA PROVIDER 407, DIRECTORY 413, and MEMORY 415.

When the POLICE touchpoint is pressed, the PCD places a call to emergency 911. The  
30 911 telephone number is the default, another number could instead have been entered for any  
particular user through the preferences selection. Once the telephone call is answered, the PCD  
provides the information entered using the Preferences function and the device location. The user  
may also establish voice and data communications through the microphone 34 and speaker 33  
(shown in FIG. 3).

35 The PCD performs equivalent functions when the MEDICAL touchpoint is pressed. As  
different phone numbers and information can be entered in the selection of user preferences,  
however, different phone numbers may be used and different information may be transmitted.

1           When the DATA PROVIDER touchpoint is pressed, the processor displays the Data  
Provider Connect page. The Data Provider Connect page provides a means to specify the type  
and amount of data to be downloaded from a specified data provider. The Data Provider Connect  
page has numerous data fields which are selected by use of the cursor. Once a field is selected,  
5           the user may enter data in that field using the alphanumeric keys. The data fields include data  
for name, city, state, map area, zip code, telephone area code, retail category, distance from  
device location, and maximum number of listings to be provided by the data supplier. Whether  
a map only is requested and what particular types of maps, such as interstate maps, walking area  
maps, zip code maps, street maps, area code maps, or state maps, are requested are also provided  
10          as options. Touch points for weather information and traffic reports are also provided. Once the  
appropriate data fields and/or type of data required is input or selected, pressing the send key  
transmits the data request to the data provider. Details regarding the method of transmission of  
the responsive data is automatically sent by the data provider to the data provider along with the  
data request.

15          The primary data providers may include the public telephone company networks but may  
also include other entities. The data providers maintain data, including maps, telephone yellow  
page entries, and other information such as traffic and weather reports. This information is  
maintained in a timely manner and is accessible through the use of data base methods well known  
in those in the art. Upon receiving a request for data, the data provider determines the nature of  
20          the data request, searches the appropriate data base or data bases, and transmits the requested  
information to the requesting device in the manner specified by the requesting device. The user,  
after the PCD receives the data as requested, disconnects, goes off line to review the information,  
deleting some, saving others, and storing other encoded information on the PCD. The user can  
now further edit the device's entire data base and decide a sequence for navigating to the locations  
25          listed in the various menus as waypoints. Thus users of the PCD can decide to navigate using the  
GPS features of the PCD and select certain waypoints and the order in which to proceed. By way  
of example, but not limited to same, users could select gas stations, banks, restaurants, shopping  
centers in unfamiliar areas, navigate today from one point of beginning and tomorrow continue  
navigating from another point of beginning, being assured that the device will always know how  
30          to get to various locations. Should the user require further locations to visit, the PCD is capable  
of obtaining new navigational data and adding to the already active route plan without having to  
completely start over.

          Pressing the DIRECTORY touchpoint 413 displays an alphabetical listing (not shown)  
of phone numbers stored on-board. The user may scroll through the listing and select a desired  
35          phone number. Pressing MEMORY 415, displays an alphabetical listing (not shown) of  
frequently used phone numbers. The user may scroll through the listing and select a desired  
number. Pressing the SEND button causes the device to dial the selected phone number.

1        FIG. 16 illustrates the Computer page. The Computer page is accessed by pressing the  
COMPUTER touchpoint 450 (shown in FIG. 6) on the Main Menu page. The Computer page  
allows the user to operate the device as a standard personal computer utilizing application  
5        programs of the type normally present on personal computers. As examples, the display of  
FIG. 16 provides for touchpoints in the sub-menu portion of the display for calendar date entry,  
notes, and organizer application programs. As with the other pages, the limited GPS information  
is also displayed.

10        FIG. 17 illustrates the Radio page. The Radio page is accessed by pressing the RADIO  
touchpoint 500 on the Main Menu page. The radio mode provides the user with an interface for  
selecting the type of radio signal through touch points displayed in the sub-menu 151 area. The  
selectable types are: AM 503, FM 507 and TRANSCEIVER 511. Selecting any type will display  
a page (not shown) requesting frequency, volume, and other parameters relating to radio  
transmission and reception. The AM and FM are standard receivers. The device can thereby  
15        tune and listen to broadcasts that provide data links and receive data files using legal AM or FM  
radio bands (or any other radio band legal to access and provide radio station information). The  
device therefore allows users to communicate information amongst themselves without having  
to rely on telephone technology. This is especially valuable when telephone technology is not  
available.

20        The Receive Queue page displays stored received messages. The received messages may  
be displayed by reception type through selection of the transmission line type listed in the  
sub-menu portion of the display, the selectable types, through touch points displayed in the  
sub-menu 151 area, are: ALL 553, FAX 555, BEEPER 557, PHONE 559, COMPUTER 561 and  
RADIO 563. Selecting a type, will sort (by specified type) and display (by date and time) all  
messages received. By way of example, the radio queue contains GPS-encoded voice mail or  
25        digital files (containing information to various sites) provided by private third-party sources. The  
phone system queue contains previous calls with digital messages linked to web pages containing  
voice and video data. The computer which may be queued contains personal letters, calendars,  
notes and the like from more traditional sources or user created tagged files for storage. The fax  
queue contains traditional faxes which may illustrate maps with waypoints. The beeper mode  
30        queue contains received beeper messages (digital and voice).

35        The Send Queue page is accessed by pressing the SEND QUE touchpoint on the Main  
Menu page. The Send Queue page includes similar functions as the receive queue, except the  
Send Queue is a staging area for sending messages. The Send Queue page displays sent or  
to-be-sent data and an interface for selecting the specific type of queue. The selectable types,  
through touch points displayed in the sub-menu portion of the display 151, are: ALL 603, FAX  
605, BEEPER 607, PHONE 609, COMPUTER 611 and RADIO 613. Selecting a type, will sort  
(by specified type) and display (by date and time) all messages sent or waiting to be sent.

1        FIGS. 23 A and B are a system block diagram including a block diagram of a data  
2        provider. A plurality of PCDs 231, 232, 233 communicate with each other using the  
3        aforementioned communication means. The PCDs also communicate with various data base  
4        information suppliers including private data base information suppliers, publisher data base  
5        information suppliers, telephone service data base information suppliers, and a data base  
6        provider. The data base provider receives digital requests for map information or other data  
7        regarding a geographic area. The data provider collects map data and other data and tags the  
8        other data to the map data and maintains the map and location tagged data in a data base. Human  
9        intervention is not required in responding to data requests.

10       As shown in FIG. 23B, the application module of the device is ported to a computer  
11       system not GPS capable, or merely not portable so as to have no need for a GPS receiver. The  
12       application module allows non-PCD based computer users to provide data to the data provider  
13       in the correct format, as well as receive data from devices or the data provider. This allows the  
14       non-device base computer user to track the location of devices and to collect information to be  
15       manually entered into a traditional GPS capable device as an aid in future trip planning.

16       FIG. 20 illustrates a list of GPS encoded data for a restaurant listing of restaurants in a  
17       requested area. This list may have been furnished by third parties or a data provider. The PCD  
18       has stored this information in digital format and is displayed on a GEO coded map, GIFF map  
19       or any other map the PCD stored in memory or receives from a third party or data provider. The  
20       information can be arranged by the PCD using criteria enabling the user unlimited access to the  
21       data. If the user chooses to navigate to these locations singularly or as a group, the GPS engine  
22       performs these functions, allowing a user of the device to accurately travel to the desired  
23       restaurant. As shown in FIG. 21, the PCD can use any scale of map or combinations and other  
24       types of maps as shown. The user of the PCD selects certain maps for storage and recalls same  
25       when needed for navigation. By way of example, the user's device could have a local Los  
26       Angeles street map, an interstate map (as shown in FIG. 21), and a New York city map in device  
27       memory. The user could navigate to the airport using the GPS functions and stored Los Angeles  
28       map, fly to New Jersey, rent a car and navigate to New York using the interstate map and, finally,  
29       find a specific restaurant in New York City by using the third map stored in PCD memory.

30       As shown in FIG. 22, the PCD contains a map with various waypoint locations the user  
31       has selected. These waypoints are both standard waypoints 221 and linked waypoints 222. The  
32       waypoints are indicated by a marker on the display. Standard waypoints indicate identifiable  
33       locations of interest. Linked waypoints have additional data associated with the waypoint. The  
34       additional data may be text data, visual data such as a photographic image of the waypoint, or an  
35       audio data file. When the marker for the linked waypoint is selected using the touch screen or  
36       other input device, the processor determines if the additional data associated with the waypoint  
37       is available in the PCD memory. If the additional data is not available in the PCD memory, the

1 PCD automatically requests the additional data from a data provider. Once the additional data is available, the PCD displays or otherwise makes use of the additional data.

Using the map of FIG. 22, the user could navigate to a school, restaurant, bank, gas station, government office using the PCD to interpolate using spatial query techniques to find the best routes to each location. The PCD can re-collate the list for the most efficient route using the application and GPS engine modules. Using software programming techniques and math formulas, persons skilled in the arts will utilize spatial analysis queries and functions to determine best routing and "closest to" scenarios. In addition, centroid interpolation functions and match-rate comparison functions used by the GEO coding community will further enhance this application's ability to universally communicate with other systems.

FIG. 30 further illustrates a system whereby the user uses a PCD to dial a direct access number similar to dialing 411, but all requests are requested and serviced automatically. Upon connection to the system, the user makes keyboard requests to the PCD or traditional computer system using the application program of the PCD. Upon requests being received by the data provider or similar information provider, the provider or supplier searches the data base for data responsive to the request. The provider or supplier can access further data through data links to other third party sources and continue to provide all data required by the requester. This system is consistent with the world wide web, linking data through hypertext connections and designations. This invention's system converts information requests to data requests, not verbal requests, as presently being practiced in directory assistance type services. This narrow usage of the application module allows convenient access to directory assistance that primarily provides data and chunks of information in a short period of time consistent with directory assistance today.

FIG. 31 shows a web page screen with a data provider icon displayed on the device. Pressing or otherwise selecting the icon will enable a menu for the requester to specify a data request. Download will be in the form of a compressed digital data file that may include video, sound, or other digitally encoded data.

FIG. 32 illustrates a Weather Map Request page. The Weather Map Request page is accessed by pressing the Weather button 27n (shown in FIG. 2) on the PCD. The Weather Map Request page allows the PCD user to specify the map location and scale, the map type, whether the selected map should be automatically updated at specified intervals, and whether a set of maps should be displayed in a sequential fashion. The PCD displays a number of different types of weather maps, including satellite images, radar maps, temperature maps, wind chill maps, and any other type of weather map available. Some weather information is more perfectly provided by showing a sequence of displays indicating the change in weather over time. Therefore, the PCD allows the operator to sequentially display a set of maps, thus providing an animated map display.

1           FIG. 33 illustrates a weather reporting device. The weather reporting device has a power  
port 334 to provide electrical power to the weather reporting device. As with the PCD, the  
weather reporting device may also be powered by a battery (not shown). The weather reporting  
device also has a computer port 335, an interface port 333, an antenna port 332, a pressure access  
5   port 331a, and a number of auxiliary ports 331b-e. The computer port provides a  
communications interface to a standard personal computer or the PCD. The interface port  
provides an interface to systems with weather detection features, such as aircraft with weather  
radars or lightning strike finders. The antenna port allows an external antenna to be connected  
to the weather reporting device, thereby providing remote operation capability. The pressure  
10   access port provides external access for an internal pressure sensitive device (not shown) for the  
determination of barometric pressure. A plurality of auxiliary input ports 441b-e provide an  
interface for connecting the weather reporting device to external weather detection sensors such  
as temperature sensors, wind sensors, and other weather sensing devices.

15           In one embodiment the weather reporting device additionally includes a coaxial cable  
port, a fiber optics port, and a telephone line port. The coaxial cable port allows the weather  
reporting device to be attached to a cable television distribution system. Attachment to the cable  
distribution system allows the device to transmit information over the cable distribution system  
to a central office of a cable television network. The fiber optic port similarly allows the weather  
20   reporting device to be attached to a fiber optic communications network. The fiber optics  
communication network may be either a cable television distribution system or a telephone  
distribution system. The telephone access port allows for the connection of the weather reporting  
device to a standard telephone network.

25           A condition reporting device is a weather reporting device, but with increased  
capabilities. The condition reporting device further includes a radio radar unit similar to those  
used by police agencies to detect automotive vehicular speed. Alternatively, the condition  
reporting device may be equipped with sonar, infrared, or other distance measuring devices.

30           FIG. 34 illustrates a block diagram of the condition reporting device (CRD). The CRD  
includes a processor 1200, memory 1202, a battery 1204, a speed detector 1206, a digital camera  
1208, a radio transceiver 1210, an antenna 1212, a coaxial cable port 1214, and sensors 1216.  
The memory stores data pertaining to operation of the CRD, including instructions for execution  
by the processor which controls operation of the CRD. Specifically, the processor reads data  
from the various sensors and transmits data via the transceiver. In one embodiment the memory  
35   additionally stores data pertaining to normal expected conditions, such as normal temperatures  
or traffic flow, at the CRD location. This data could take the form of merely the average normal  
temperature at the site, but more preferably provides daily or hourly normal temperatures and  
hourly traffic pattern information.

1 With respect to the use of the radar or other similar unit, the condition reporting device  
may be mounted on the sides of freeway overpasses or poles adjacent a vehicular arterial route  
to determine automotive vehicular speeds on the freeway or arterial route. Alternatively, the  
radar unit may be replaced by a sonar unit wherein the use of sound waves are used in place of  
5 radar waves to determine vehicular speed on the freeway or arterial route.

The condition reporting device additionally includes sufficient computer memory to store  
at least a single digitized video picture. The single picture is provided to the condition reporting  
device through the digital camera, which may be a charged coupled device (CCD) coupled to the  
condition reporting device through one of the auxiliary input ports. The condition reporting  
10 device may also obtain data representing the single digitized video picture via a direct  
transmission to the condition reporting device through the antenna of the condition reporting  
device. Thus, photographs in digital format obtained by others, such as television news  
helicopters, may transmit a digital picture to the condition reporting device for storage.

The radio transceiver unit allows the condition reporting device to transmit information  
15 via radio signals both to end-users and to other condition reporting devices. As illustrated in  
FIG. 35, first through fourth condition reporting devices 1220a-d are located alongside an arterial  
route 1222. Traveling along the arterial route are automobiles 1224a,b. A home 1226 equipped  
with a radio receiver 1228 is located near the arterial route. Specifically, the home is located  
most near the fourth condition 1220d reporting device, and most distant from the first condition  
20 reporting device 1220a. The automobiles receive information from the condition reporting  
devices via radio signals, as does the home, and thus end-users in the automobiles and the home  
receive up-to-date information regarding conditions along the arterial.

The end-users, however, may not desire information regarding road conditions from  
condition reporting devices which are close enough for the end-users to receive radio  
25 transmissions. Accordingly, the condition reporting devices are two-way daisy-chained together.  
That is, the second condition reporting device receives information broadcast from the first  
condition reporting device and the third condition reporting device. The second condition  
reporting device also transmits the information received from the first condition reporting device  
and the third condition reporting device in addition to the information specific to the second  
30 condition reporting device.

In one embodiment, the transmission of information is accomplished using a  
time-interleaf method in which the second condition reporting device transmits the information  
received from the first condition reporting device over a first time interval, and transmits the  
information specific to the second condition reporting device over a second time interval. In this  
35 time-interleaf method each condition reporting device in the daisy-chain is programmed with the  
number of other condition reporting devices in the daisy-chain, the transmission frequency the  
two closest condition reporting devices in the two-way daisy-chain, the total number of condition  
reporting devices in the chain, and the position of the condition reporting device in the chain.

1           The condition reporting device uses this information to determine the time necessary to  
receive transmissions from the two closest condition reporting devices in the chain and to  
determine the total transmission time for each cycle of transmission of the condition reporting  
device. For example, if each condition reporting device is allocated 30 second for transmitting  
5           their own information, the total cycle transmission time is two minutes if the first through fourth  
condition reporting devices are two-way daisy chained together.

FIG. 36 illustrates a block diagram of a cable television distribution system for the  
weather reporting and condition reporting devices. A central cable television office 1230  
provides for transmission of television signals over land line 1231 to various locations 1231a-v.  
10          The various locations may be residences, businesses, or other users of cable television  
distribution services. The land lines may be coaxial cable or fiber optic land lines. A central  
cable television office also provides links 1236 to telephone and computer networks for the  
transmission of Internet-related data. Thus, the land lines provides two-way communication  
between the central cable television office and the various locations.

15          Also attached to the land line are condition reporting devices 1234. The condition  
reporting devices are attached to the land line either through the cable access port or the fiber  
optic access port, depending on the nature of the land line to the condition reporting devices. The  
condition reporting devices transmit digital data corresponding to the data received by the devices  
input sensors over the land line to the central cable television office. The central cable television  
20          office then transmits digital information received by the condition reporting devices to the  
residences in other locations, with each condition reporting device provided a separate cable  
television channel.

Thus, in one embodiment condition reporting devices may be located in a variety of  
geographic locations throughout a cable television distribution area. Receivers of cable television  
25          may set their channels to a channel for a specific condition reporting device and obtain weather,  
traffic, and video information for a specific location within the cable television broadcast area.  
Moreover, condition reporting devices located in bars, restaurants, and other venues may transmit  
video pictures of the interior of such establishments as a form of advertising for the  
establishments, as well as for the entertainment of television viewers at home or elsewhere.

30          The locations of the condition reporting devices are also tracked by a central computer  
system. The central computer maintains a database of the locations of condition reporting  
devices. For condition reporting devices located along roadways such as streets and highways,  
the central computer system also stores in the database an indication of the road or highway along  
which the condition reporting device is located. Further, many organizations, particularly state  
35          highway departments, maintain digital cameras providing roadway information available over  
the World Wide Web (WWW or WEB). The central computer system also tracks locations of  
these digital cameras, as well as other non-condition reporting devices.

1 CRD location data may be used in conjunction with route information (plot trail) stored  
by the PCD. FIG. 37 illustrates a process for using the route information stored by the PCD to  
obtain information concerning the availability of condition reporting devices from the central  
computer system along the route stored by the PCD. In step 1240 a request for condition  
5 reporting device locations is transmitted by the PCD to the central computer system. Any of the  
communication means included with the PCD may be used to form such transmission, with one  
embodiment using cellular telephone communication. Included with the request for condition  
reporting device locations is data indicating the route information maintained by the PCD. The  
route information includes waypoint information for waypoints along the route. Road and  
10 highway identifiers are also transmitted when the route information also includes road or highway  
identifiers.

In step 1242 the central computer receives the condition report device request from the  
PCD. In step 1244 the central computer system determines the locations of condition reporting  
devices along the route. If the route information includes road or highway identifiers, then the  
15 central computer system identifies condition reporting devices along such roads or highways, and  
also determines the condition reporting devices along such roads or highways within the latitude  
and longitude constraints, as indicated by waypoints, of the route. This process is performed for  
each road or highway identified in the route information as being along the route. If the route  
information does not include road or highway identifiers, then the central computer system  
20 determines the locations of condition reporting devices within one-tenth of a mile of the route.  
The central computer system of course need not be limited to reporting condition reporting device  
locations within one-tenth of a mile of the route. Other distance values may be used, and the  
PCD may also transmit a requested search criteria to the central computer system for use by the  
central computer system.

25 In step 1246 the central computer system transmits condition reporting device locations  
along the route to a PCD. For each such condition reporting device, the central computer system  
also transmits information identifying methods of communication with the condition reporting  
devices. For example, some condition reporting devices may make data available over computer  
networks such as the Internet or World Wide Web. Other condition reporting devices may only  
30 transmit information via radio communications within a small area, or may be part of a linked  
condition reporting device system allowing for radio communication over larger areas.

In step 1248 the PCD receives the locations of reporting devices. In step 1250 the PCD  
correlates the condition reporting device locations to the route information and forms a map  
display indicating the trail plot and the condition reporting device locations the process then  
35 returns.

FIG. 38 illustrates a display of a PCD displaying a trail plot with condition reporting  
device locations. As illustrated, the trail plot is indicated by a thick line. The thick line follows  
a first route 1262 until the first route intersects a second route 1260. The plot trail thereafter

1 follows the second route. The locations of condition reporting devices 1264a-b are indicated along the route by star symbols (☆).

Three methods are used by the PCD to obtain condition reporting device information, a manual method, an automatic hand-off method, and an automatic sequence method.

5 FIG. 39 illustrates a process of the manual method. In the manual method the user of the PCD slews the cursor over the reported location of the condition reporting device in step 1270. In step 1272 the user selects the condition reporting device identified by the cursor. In step 1274 the PCD determines whether the condition reporting device is communicated with a via a computer network or via radio transmissions. If the condition reporting device is communicated with via a computer network, then the PCD transmits a request to the condition reporting device for data over the computer network in step 1275. If the condition reporting device transmits information via radio communications, then the PCD sets its radio receiver to the appropriate frequency for receiving transmissions from the condition reporting device in step 1276. In step 1278 the PCD receives the information from the condition reporting device. The PCD then formats the data in step 1280 and displays the data in step 1282.

10 FIG. 40 illustrates a PCD display showing information received from the condition reporting device. The information from condition reporting device includes a single digital photo 1284. The information received from the condition reporting device also includes traffic speed indications 1286 and current weather information, including temperature 1288 and wind speed 1289.

20 FIG. 41 illustrates a process of the automatic hand-off method for obtaining condition reporting device information. The automatic hand-off method is similar to the manual method, but the user of the PCD is not required to select condition reporting device locations with the cursor. Instead, the PCD maintains a sequential list of condition reporting device locations along the route. The sequential list is ordered by condition reporting device locations along the route such that a first condition reporting device expected to be encountered along the route is placed first in the list, and the last condition reporting device expected to be encountered along the route is placed last in the list. As the PCD travels along the route condition reporting devices are removed from the list when the PCD comes within a predetermined distance, one-tenth of a mile in the preferred embodiment, of the condition reporting device location.

25 When the user selects COND RPT on the PCD display the PCD determines which condition reporting device is currently first on the list. The PCD then contacts the condition reporting device, as in the manual method, and displays the condition reporting device information, also as in the manual method. Once the PCD comes within the predetermined distance of the condition reporting device the PCD removes the condition reporting device from the list, and automatically requests information from the next condition reporting device along the route and displays such information.

1           Thus, as illustrated in FIG. 41, the process determines an ordered list of CRDs along the route in step 1290. In step 1292, the process causes information from the next CRD to be displayed. In step 1294 the process determines if the CRD whose information is being displayed is within a predefined distance of the PCD. Once the CRD is within the predefined distance the  
5           process deletes the CRD from the ordered list in step 1296. In step 1298, the process determines if the list is empty. If the list is empty, the process returns. Otherwise, the process displays information from the next CRD in the list to be displayed in step 1292.

          FIG. 42 illustrates a process of the automatic sequence method for obtaining condition reporting device information. As in the automatic hand-off method, the PCD maintains a  
10           sequential list of condition reporting device locations along the route. The sequential list is ordered by condition reporting device locations along the route such that a first condition reporting device expected to be encountered along the route is placed first in the list, and the last condition reporting device expected to be encountered along the route is placed last in the list. Information from each condition reporting device in the sequential list is displayed for a period  
15           of time, in one embodiment ten seconds, and then the next condition reporting device in the sequential list is displayed. After information from the last condition reporting device in the sequential list is displayed, the PCD displays information from the condition reporting device first in the sequential list. As in the automatic hand-off method, as the PCD travels along the route, condition reporting devices are removed from the list when the PCD comes within a  
20           predetermined distance of the condition reporting device location.

          Thus, as illustrated in FIG. 42, in step 1310, the process creates a travel list comprising a sequential list of CRDs expected to be encountered over the route. The process causes data from the first CRD in the list to be displayed in step 1312. The process then determines if a predefined time period has elapsed in step 1314. Once the predefined time period elapses the  
25           process determines if the list is empty in step 1316. If the list is empty the process returns. If the list is not empty the process causes display of data from the next CRD in the list in step 1317. The process then waits predefined time period in step 1318. When the predefined time period elapses the process determines if the end of the sequential list has been reached in step 1320. If the end of the list has been reached the process causes display of information from the first CRD  
30           in the list in step 1317. Otherwise, the process causes display of information from the next CRD in the sequential list in step 1317.

          Thus, in either the automatic hand-off mode or the automatic sequence mode, the user may have a PCD in his automobile and be automatically informed of current road conditions along the expected route. If road conditions are reported as unpassable due to weather or traffic,  
35           then the user may appropriately plan to take alternate routes.

          The use of the PCD in conjunction with CRDs accordingly provides the PCD user the capability to receive up-to-date detailed information regarding conditions along the PCD user's

1 route. This allows the PCD user to plan use alternative routes as conditions warrant. Such planning is further enhanced by an alternative route (ALT RTE) function of the PCD.

5 The ALT RTE function of the PCD uses current speed information from CRDs along the user's route, and alternatives to the user's route, to determine travel times. FIG. 43 illustrates a PCD display showing a user's route 1300 comprised of multiple segments 1300 a-d. The user's route follows a first street 1300a, a first highway 1300 b, and a second highway 1300c. Roads and highways near the users route include a second street, a third street 1304, and a fourth street 1306. The user's route includes a segment A which follows the first street 1300a in a southerly direction to the first highway 1300b, which runs in a east-west direction. The user's route then has a segment B which follows the first highway 1300b in a westerly direction until the first highway intersects the second highway 1300c, which runs in a north-south direction. The user's route then has a segment C which follows the second highway 1300c until the termination of the route at the intersection of the second highway 1300c and the fourth street 1306.

15 Alternatively, the user could take a route including a second street 1302 which runs in a east-west direction, a third street 1304 which runs in a north-south direction and intersects the second street and the fourth street 1306. The second street is comprised of a segment D from the user's start point to the third street, and a segment E from the third street to the second highway. The third street is similarly comprised of a segment F and a segment G.

20 Condition reporting devices 1308a-j are located at various points along the streets and highways. The condition reporting devices provide traffic speed and weather indications through the PCD via methods discussed above. The map information made available to the PCD and stored by the PCD contains distance information. The PCD therefore is able to make use of the traffic speed information and the distance information to determine travel times for the various route and route alternative segments. Real time calculation and display of segment travel times accordingly allows the PCD user to accurately determine and estimate travel times to particular destinations over a plurality of different roads and road segments.

25 FIG. 47 illustrates a process of determining travel times. In step 1390, the process reads route information stored by the PCD. In step 1392, the process determines if the user has provided alternative route segments. If the user has provided alternative route segments the process reads information describing the alternative route segments in step 1394. Otherwise, the process determines alternative route segments in step 1396. Regardless, if the source of the alternative route segments, the process determines travel times for each of the route segments; and the route as a whole, in step 1398. The process then returns.

30 FIGs. 48A-H and FIGs. 49A-G illustrate an alternate embodiment of a PCD. The alternate embodiment includes an alphanumeric keypad with special function keys, a display screen, a microphone and speaker, an antenna, and a digital camera. The alphanumeric keypad includes a power button, alphanumeric keys corresponding to those keys generally found on cell phones, and special function keys. The special function keys include a Navigate key, a C-Mail

1 key, and a Phone key. The special purpose keys further include a Store key, a Zoom key, and a  
Clear key, as well as an Enter key and a Home key and a Send, Recall, and an End key. As with  
the previously described version of the PCD, the PCD is equipped with a GPS receiver system  
so as to be able to use the global positioning satellite system to accurately determine the location  
5 of the alternate PCD.

The camera is a digital camera, which includes a sensing housing containing a charge  
coupled device (CCD) or other digital imaging device. The image formed by the digital camera  
is stored on memory contained within the PCD device, along with a GPS stamp. The GPS stamp  
is placed within the picture image in a manner similar to the placing of a time or date stamp on  
10 a digital image picture. Of course, methods and apparatus such as those described in U.S. Patent  
No. 4,402,588, the disclosure of which is incorporated herein by reference, may be used.  
However, in the embodiment described the GPS stamp is placed into the image by overriding  
areas of memory with the GPS provided data. The GPS stamp provides latitude and longitude  
information, and serves as a convenient way of accurately placing the location of images.

15 In addition, the use of a camera with the PCD device allows the PCD device to serve as  
a mobile condition reporting device (CRD). The image taken using the PCD camera, along with  
the appropriate GPS stamp, is provided by the cellular communication capability, included with  
the device, to a central computer storage system. The central computer storage system then  
makes the CRD device data available, in the manner as previously described, to those requesting  
20 condition reporting device data.

In one embodiment, operators of the PCD device with camera can also indicate road  
status information. Road status information may be important, for example, in the event that a  
road is closed. In such an occurrence, viewers of CRD data might believe that a road is free and  
clear of traffic, when in fact the road is impassable. Furthermore, images of the roadway may  
25 not accurately describe all of the road conditions, such as ice or high winds, which may also  
impact roadway usage. Accordingly, the user has the option of tagging each image with a  
roadway status, with the possible status being open, closed, or caution. In one embodiment the  
central computer facility, however, will only include roadway status information if the person  
providing the roadway status information supplies a specified security code. This allows for only  
30 authorized personnel to update road status information. This prevents users from changing  
roadway status information so as to affect traffic patterns in such a manner that they may more  
freely use roads.

In one embodiment, all images taken using PCDs are automatically provided to the central  
computer facility. In another embodiment, users provide security level information for each  
35 image, which may be provided via default security level, with only images of a certain predefined  
security level transmitted to the central facility.

FIG. 44 illustrates a block diagram of a local area transmission system for providing  
multimedia information using GPS navigation system coordinates. Data 1330 pertaining to a

1 local geographic area is maintained by cellular telephone system providers or other entities. The  
particular local geographic locations are based on the locations of cell sites for cellular telephone  
networks, and the location specific data is transmitted by a cell site 1332 both over a standard  
radio broadcast system using a radio transmitter 1334 and by request to the cell site via a  
5 telephone access number. This data includes ASCII or other text formats, digital graphical  
images, including maps, digital photo-based images, and audio data.

In the radio broadcast system method of transmitting data, a first radio frequency is used  
to inform receivers of the radio broadcast of specific frequencies to be used to obtain particular  
types of data. The specific frequencies continually transmit data pertaining to services and  
10 information of the type specified for the particular frequency. The data includes text and graphics  
normally including names, addresses, phone numbers and GPS locational information for  
providers of the services of the type for that frequency. Additionally, digital GPS maps for the  
particular cell site broadcast location are also included.

Similarly, each cell site location is provided a specific telephone number. Users of  
15 cellular telephone-capable devices call the number and are in turn provided a list of telephone  
numbers for providing data equivalent to the data provided by the radio broadcast system. Two  
sets of phone numbers are provided. The first set provides voice audio information, and the  
second set provides information in digital form. In one embodiment, users of a PCD then direct  
the PCD device to obtain digital text, graphical maps, and GPS location information from the cell  
20 site telephone number. This information may then be used by the user of the PCD device to  
determine route information and to obtain data in the same manner as from other GPS tagged  
data providers.

FIG. 45 illustrates a method of directing a PCD to obtain restaurant-related information  
from the cell site telephone number. In step 1340 the PCD displays a screen having PHN #,  
25 PHN/EMAIL, and RTN ADDRS entry fields. The user enters the cell site telephone number in  
the PHN # entry field, P or E in the PHN/EMAIL entry field, and either the phone number of the  
PCD or an e-mail address in the RTN ADDRS entry field. In step 1342 the user enters  
information in the PHN #, PHN/EMAIL, and RTN ADDRS entry fields. If the user enters P in  
the PHN/EMAIL entry field, then the user should also enter the phone number of the PCD in the  
30 RTN ADDRS entry field. If the user enters E in the PHN/EMAIL entry field, then the user  
should enter an e-mail address in the RTN ADDRS entry field.

In step 1344 the user selects the TRNSMT option and the information entered by the user  
in step 1342 is transmitted by the PCD to the cell site telephone number. In step 1346 the cell  
site computer system determines which information pertains to the cell site telephone number.  
35 In step 1348 the cell site computer system determines whether the information transmitted by the  
PCD included a P or an E in the PHN/EMAIL field. In step 1352 the cell site computer system  
instructs the cell site to transmit the information pertaining to the cell site telephone number to  
the phone number transmitted by the PCD in the RTN ADDRS field if the PHN/EMAIL field

1 contains a P. In step 1350 the cell site computer system transmits an e-mail message to the e-mail address transmitted by the PCD in the RTN ADDR5 field if the PHN/EMAIL field contains an E.

5 Each cell site data provider additionally provides traffic and weather information for the cell site. By way of example, a central data provider may receive weather and traffic information from weather reporting devices and condition reporting devices and store that data by the latitude and longitude location of those devices. This data may be then transmitted over a particular frequency or made accessible by having users call a particular telephone number so that individuals may obtain accurate and timely weather and traffic information regarding specific  
10 localities.

The PCD also serves as a position monitoring device. To begin the position monitoring function the user selects the monitor on the PCD. Upon selecting the monitor function, the PCD displays a menu including INTERROG, AUTO-TIMED, and MOVE options. When the INTERROG function is selected the PCD will display an e-mail entry field allowing input by the user of an e-mail address. After the e-mail address is entered, the PCD responds to appropriate interrogatories by transmitting its current position. An appropriate interrogatory includes the security code active when the INTERROG mode was selected and an Internet e-mail address. Upon receipt of an appropriate interrogatory the PCD will transmit the GPS receiver determined latitude and longitude of the device to the e-mail address.  
15

20 If the user selects the AUTO-TIMED option the PCD displays a time entry field and an e-mail address entry field. After entry of the time entry field and the e-mail address, the PCD will count down the time period entered by the user, and, upon the completion of the time period, transmit an e-mail to the entered e-mail address indicating the PCD location. After transmitting the PCD location to the e-mail address, the PCD will begin counting down the time period previously entered by the user, and once again transmit the PCD location upon the completion of the time period. Thus, for example, if the user enters the time 30 minutes into the time field and the e-mail address of abc@def.com, then every 30 minutes the PCD will transmit the PCD location to abc@def.com.  
25

30 When a user selects the MOVE option the PCD displays a distance entry field and an e-mail address entry field. After entry of the distance field and the e-mail address field, the PCD transmits an e-mail containing the device location to the e-mail address specified in the e-mail field whenever the PCD moves a distance greater than the distance entered in the distance field. When the PCD transmits an e-mail indicating the device position, the current device position is stored and the PCD waits until the device has moved the distance specified in the distance field from the current location prior to again transmitting the PCD location to the e-mail address specified in the e-mail address field.  
35

Thus, the PCD can be used to monitor the locations of individuals utilizing PCDs. For example, credit authorization agencies may make use of the location monitoring capability

1 provided by the PCD in determining the validity of credit requests. FIG. 46 illustrates a method  
of credit authorization using the PCD. In step 1360 an individual makes a request for credit.  
This may be accomplished in a variety of manners, including "swiping" a credit card through a  
credit card reader at a gas station, supermarket, or a variety of other locations, or merely by  
5 providing a credit card to a retail clerk who thereafter requests credit authorization. The request  
for credit may be made to a credit card issuer, or may merely be a request for credit authorization  
by a credit reporting facility.

In step 1362 the request for credit is transmitted to a credit authorizer. In step 1364 the  
credit authorizer determines whether credit authorization is appropriate in view of the credit  
10 authorizer's prior art credit authorization practices. Such prior art practices include the use of  
credit limits, past credit usage, and other factors. If the credit authorizer determines that credit  
authorization according to prior art practices is not appropriate, then credit authorization is denied  
in step 1366. If credit authorization according to prior art practices is appropriate, then the credit  
authorizer transmits an interrogatory to the individual's PCD in step 1368. In step 1370 the credit  
15 authorizer waits a predetermined time for a response from the PCD. In step 1371 the credit  
authorizer determines if a response from the PCD has been received. If a response from the PCD  
has been received, the credit authorizer determines if the PCD location is consistent with the  
request for credit in step 1372. This may be accomplished by determining if the PCD is at the  
location from which credit was requested. If the reported location is consistent with the request  
20 for credit, then the process grants or authorizes credit in step 1378. If the reported location is not  
consistent with the request for credit, the process denies credit in step 1366. If no response is  
received from the PCD, the credit authorizer determines if previous PCD reported locations are  
consistent with the location from which credit was requested in step 1374. For example, the  
credit authorizer may have received responses from previous requests for position from the PCD,  
25 or an e-mail address of the credit authorizer may have been entered by the individual for  
AUTO-TIMED or MOVE position updates. If the previous location is consistent with the request  
for credit, then the process grants or authorizes credit in step 1378. If the previous locations is  
not consistent with the request for credit, the process denies credit in step 1366.

Additionally, PCDs can be used to monitor automobile locations and thereby discourage  
30 automobile theft or aid in the recovery of the automobile. For example, for an active PCD left  
in the INTERROG mode, upon discovery of the theft of the PCD or item in which the PCD is  
located, the user merely need to interrogate the PCD as to its location and thereafter be  
immediately informed as to the device location, thus allowing for ease in locating and returning  
the device to the proper user.

35 As another example, the user can leave the active PCD in MOVE mode, with the user's  
e-mail address designated as a recipient of the location of the PCD device. Thus, whenever the  
PCD, or object in which the PCD is located, is moved the user can receive instantaneous  
notification of the movement of the PCD and any object carrying the PCD. Further, in one

1 embodiment of the invention, the user may select a SECURITY option from the main menu. In  
the SECURITY option the PCD is automatically configured in the MOVE mode, and the PCD  
is also automatically configured to transmit an e-mail to a user defined address in addition to any  
5 other addresses specified in the MOVE mode. The user defined address is preferably that of a  
police agency or security service. Further, in one embodiment of the invention, the PCD  
additionally places a telephone call via the PCD's cellular telephonic capabilities to a user  
defined telephone number. Upon answer by the receiving telephone the PCD automatically  
transmits an indication, which may be a prerecorded voice message, that the PCD has moved  
10 from its prior location. In addition, the user defined telephone number may be the universal  
telephone number of the user, which is later herein described. In the event the predefined  
telephone number is the universal telephone number of the user the PCD additionally transmits  
a password corresponding to security level. The password and security level are selected by the  
user, and are also later herein described in conjunction with the universal telephone number.

In accordance with the present invention, the central computer system also maintains  
15 information in a database allowing individual users to be easily located both physically and in  
terms of their electronic communication locations. The central computer system maintains a  
database of individuals and an Internet address linked to each individual. The Internet address  
linked to each individual need not be a unique address, but instead many individuals may make  
use of a single computer indicated by the Internet address in the Internet address field. For  
20 example, for many cases the central computer system may be the computer system identified by  
the Internet address.

The system also contains a large number of computer systems linked by the Internet, and  
which are the computer systems pointed to by the address field for the individuals in the Internet  
address field. Each of these computers form a home site computer system. The responsibility  
25 of maintaining the home site computer systems are the responsibility of the individuals.

The home site computer system maintains electronic contact information and geographic  
location of the individual. The electronic contact information includes home telephone numbers,  
office telephone numbers, cellular telephone numbers, fax numbers, and e-mail addresses. The  
geographic location is provided in terms of latitude and longitude, although street addresses or  
30 site names can also be provided with the latitude and longitude.

Also linked to each electronic communication identifier in geographic location  
information is a security level index. In one embodiment, the security level index is a number  
between one and ten. The individual assigns security level indexes for each item of information.  
The user also identifies other individuals who may wish to contact the user, and indicates which  
35 security index level each such other individual should be provided. Other individuals who are  
not identified by the user are provided a default security level index. When the home site is  
contacted by another individual, the other individual provides an identifier, such as the  
individual's name to the home site. In one embodiment the other individual also provides a

1 password to the home site so that the home site may authenticate the identity of the individual. Based on the identity of the individual, preferably authenticated, the home site determines the other individual's security level index.

5 The other individual is thereafter only able to obtain information for the other individual's security level index value and those values below the other individual's security level index. For example, a user's general office work number may be assigned a security level index of ten, with the user's direct line phone number provided a security level index of six. A first other individual with a security index level of seven can only obtain the user's general office number while a second other individual with a security index level of six can also obtain the user's direct line  
10 phone number.

The user's geographic location is updated through the PCD. As previously discussed, the PCD can be used to provide e-mails indicative of the user's location in varying manners. When the user's home site computer system is identified as an e-mail address for such updates, the user's home site computer system may track the user over time. In one embodiment of the  
15 invention, the user's home site computer system is always provided a copy of any e-mail position updates provided by the PCD.

The capability to track individuals is further enhanced through the use of condition reporting devices. For example, a particular user is identified as being at a particular location, other individuals may request via the central computer system the location of condition reporting  
20 devices in that area. If the condition reporting device has digital picture capability, then the other individuals may request information from the particular condition reporting device and determine if the user is in fact at the location. Thus, the system of the present invention provides a method and system for tracking individuals, and for confirming the presence of individuals at particular locations.

25 In another embodiment of the invention, the user's home site computer system maintains a universal phone number, fax number, and e-mail address for the individual. When other individuals try to contact the user via the general phone number, fax number, or e-mail address the home site computer system automatically routes the incoming call, fax, or e-mail to the phone number, fax number, or e-mail address currently indicated as active for the individual. This  
30 routing is done, however, in conjunction with the other individual's security index level. Thus, if the active phone number for the user is the user's cellular telephone number, but the other individual does not have a security level index sufficient to determine the user's cellular telephone number, then the call to the user by the other individual will be automatically routed to the phone number with the highest number security level index available to the other  
35 individual. If the telephone number to which the other individual has been routed is not currently active for the user, the other individual will be left in a voice mail or other automatic answering system if available. Thus, users may selectively forward phone calls, facsimiles, or e-mails depending on requirements of the user.

1       The home site computer system maintains data indicative of the location of telephone  
numbers, fax numbers, and e-mail addresses. As the user's geographic location is updated  
through use of the PCD, the home site computer system automatically maintains a list of active  
phone numbers, facsimile numbers, and e-mail addresses for the user. Thus, if the user's  
5       geographic location as provided by the PCD indicates that the user is at the user's office, then the  
user's office phone numbers are made active. If the user's geographic location as provided by the  
PCD indicates that the user is at the user's home, then the user's home phone numbers are made  
active. If the user is at an undetermined location, then the user's home site computer system  
identifies the user's cellular telephone as the active phone. Thus, phone calls, facsimiles, and  
10       e-mails may be automatically routed, using call forwarding technology known in the art, to the  
electronic communication access number of the user without resort to sequentially calling various  
phone numbers.

      In addition, in order to contact an individual only the universal phone number, facsimile  
number, and e-mail address need be known. Thus, as actual phone numbers and e-mail addresses  
15       change due to changes in telephone area codes, zone prefixes, or changes in the locations of  
homes and businesses, individuals need only update the information maintained by their home  
system in order to be able to be contacted by those desiring to communicate with them via  
electronic means.

      The user's home site computer system also serves as a repository for data for use with the  
user's PCD. One purpose in providing such a repository is that the PCD may be unable to store  
20       all data requested from a data provider or other parties due to device memory constraints. For  
example, the user may request a map of a relatively large area and a relatively great amount of  
detail. Such a map may be too large for storage in the memory of the PCD. The user could  
request a subset of the desired map, if such a request or map is available, and request further  
25       subsets of the map as desired. Such a method, however, entails repeated requests for map  
information, and is also inconvenient if a single map section is repeatedly later used after other  
map sections are requested. Accordingly, the home site computer system provides a repository  
for such material. Data providers and information suppliers, instead of downloading data directly  
to a PCD in response to a request for information by a PCD, instead route data to the user's home  
30       site computer system.

      In one embodiment, requests from a PCD for data include an indication of allowable  
memory space for downloaded data. The allowable memory space may be automatically  
determined by the PCD based on the total device memory and the memory available at a given  
time. Thus, if a particular PCD can only accommodate additional data of 8 megabytes or less,  
35       the request for information would indicate a maximum download data size of 8 megabytes.  
Alternatively, the allowable memory space may be set by the user.

      After the data provider or other information supplier receives a request for information,  
the data provider or information supplier then transmits the requested data to the home site

1 computer system, via e-mail or other means described herein, in multiple files, each less than the  
maximum memory size of the PCD. The data provider or information supplier determines which  
information, such as map information is responsive to the request, and prepares individually  
5 readable and displayable files, or data packets, less than the allowable memory size. The user  
may thereafter request the data directly from the home site computer system, and later reuse the  
same information at the user's convenience. In addition, the user is also able to use the requested  
data using other PCDs, or even other computer systems.

10 While this invention has been described with reference to illustrative embodiments, this  
description is not intended to be construed in any limiting sense. Various other embodiments of  
the invention will be apparent to persons skilled in the art upon reference to this description. It  
is therefore contemplated that the appended claims will cover any such modifications of the  
embodiments as fall within the true scope and spirit of the invention.

## 1 CLAIMS:

1. A digital camera with GPS stamp comprising:  
a housing containing an imaging device;  
a GPS receiver for determining a position of the digital camera;  
5 a memory coupled to the imaging device and the GPS receiver, the memory storing an image formed by the imaging device and the position of the digital camera.
2. The digital camera with GPS stamp of claim 1 wherein the imaging device comprises a charge coupled device.
- 10 3. The digital camera with GPS stamp of claim 1 wherein the GPS receiver determines the latitude and longitude of the digital camera.
4. A method of forming a digital image including location information comprising:  
15 forming a digitized image in a memory;  
determining a latitude and a longitude;  
overwriting areas of memory containing the digitized image with a representation of the latitude and longitude.
- 20 5. A mobile condition reporting device comprising:  
a GPS receiver for receiving GPS signals;  
a processor programmed to determine data indicative of device location based on information provided by the GPS receiver and to provide the data indicative of device location to a memory;  
25 a digital camera providing digital image data to the memory; and  
communication means for transmitting the data indicative of device location and digital image data.
6. The mobile condition reporting device of claim 5 wherein the processor is  
30 programmed to command the communication means to transmit the data indicative of device location and digital image data.
7. The mobile condition reporting device of claim 6 wherein the processor is  
35 programmed to command the communication means to automatically transmit the data indicative of device location and digital image data.
8. The mobile condition reporting device of claim 7 further comprising input means for inputting a status indicator for association with the digital image data.

1           9.     The mobile condition reporting device of claim 8 wherein the communication means for transmitting the data indicative of device location and digital image data additionally provides a means for transmitting the status indicator.


5           10.    The mobile condition reporting device of claim 9 wherein the status indicator comprises a selected indicator from a preselected list of indicators.

10           11.    The mobile condition reporting device of claim 10 wherein the status indicator indicates the status of a roadway.

          12.    The mobile condition reporting device of claim 11 wherein the preselected list of indicators comprises an open indicator, a closed indicator, and a caution indicator.

15           13.    The mobile condition reporting device of claim 12 further comprising a security code stored in the memory.

20           14.    The mobile condition reporting device of claim 13 wherein the communication means for transmitting the data indicative of device location and digital image data additionally provides a means for transmitting the security code.

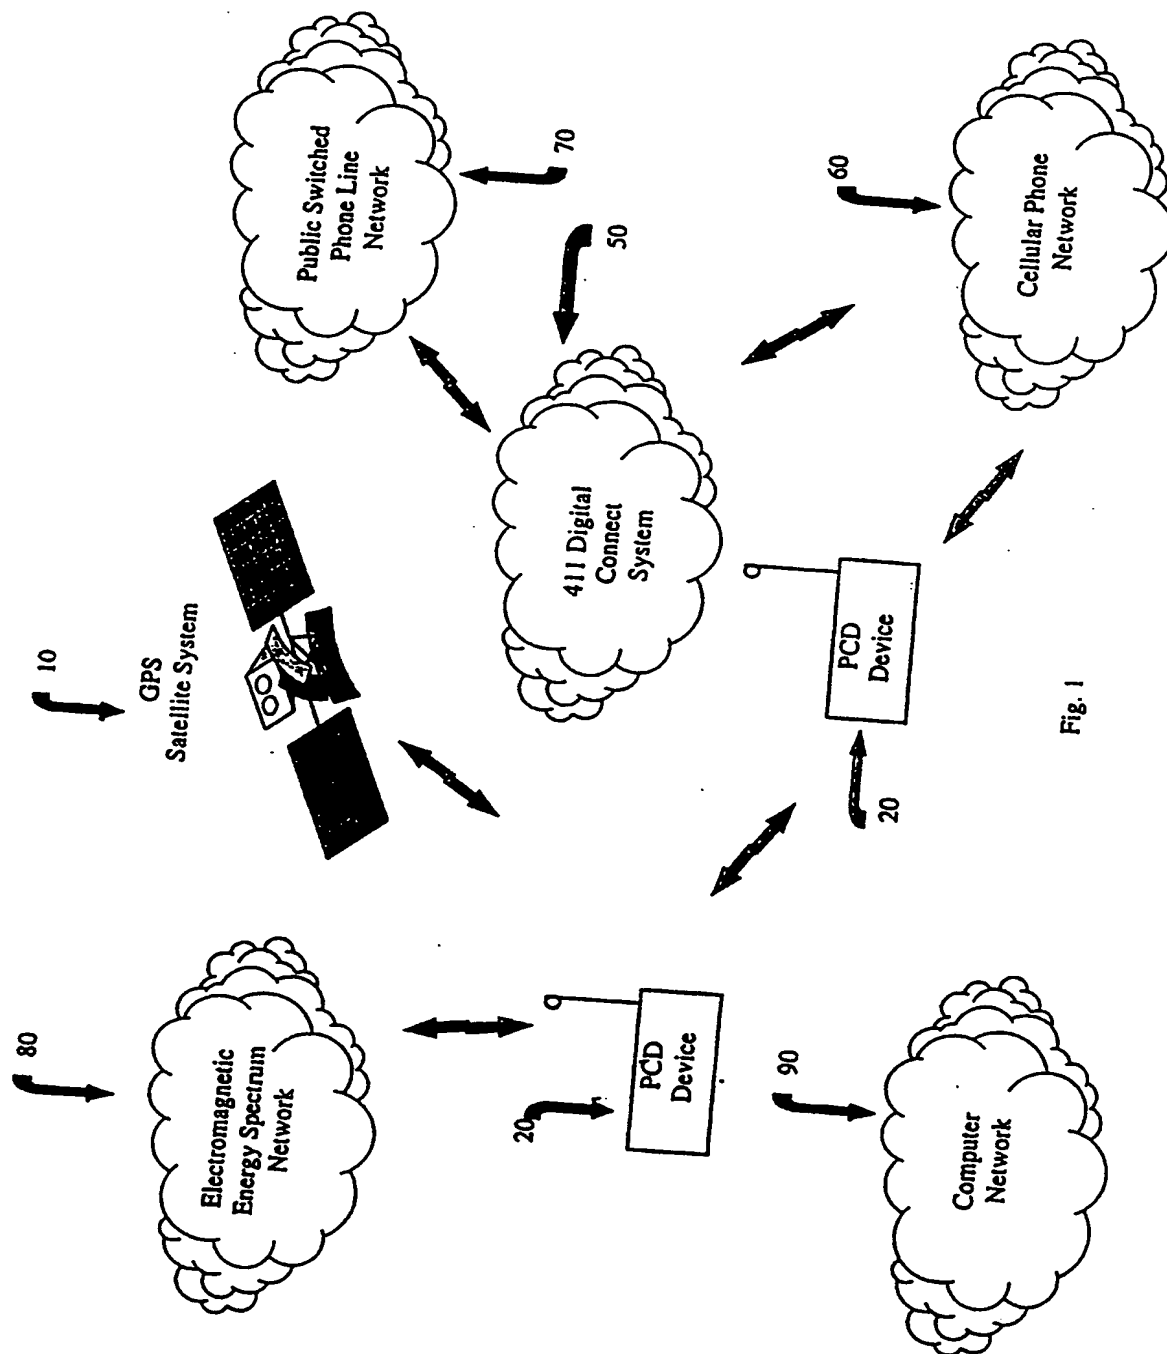

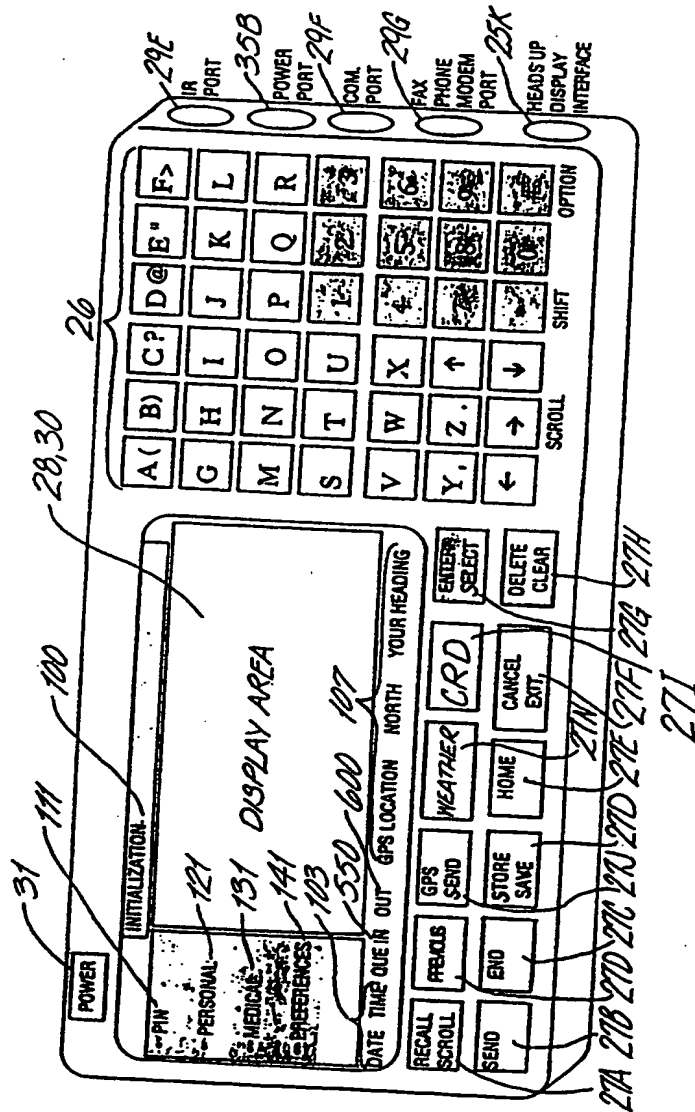


Fig. 2

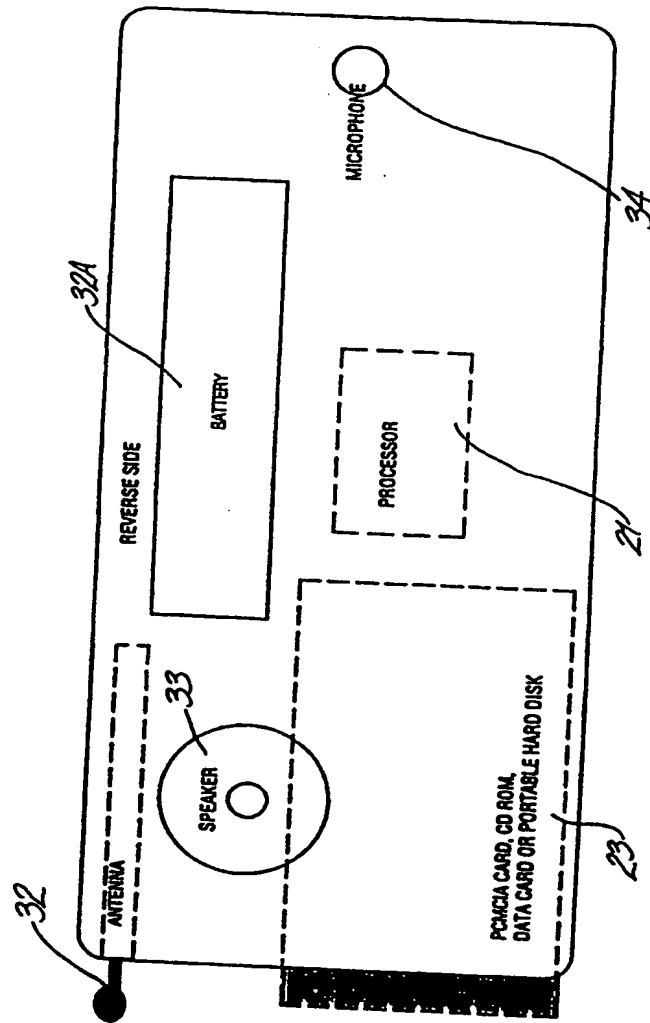
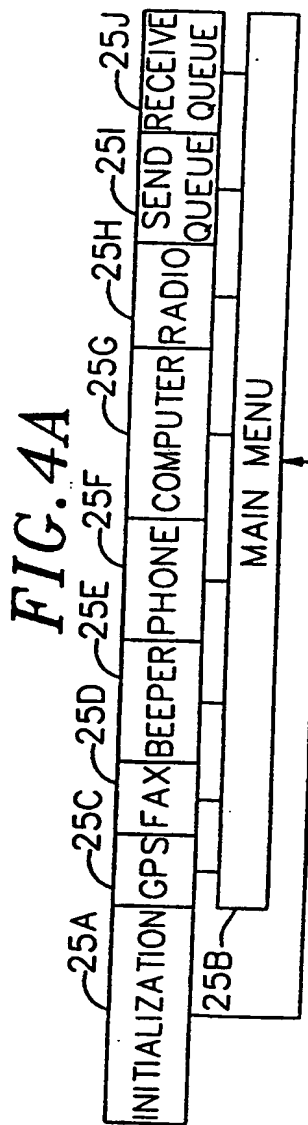
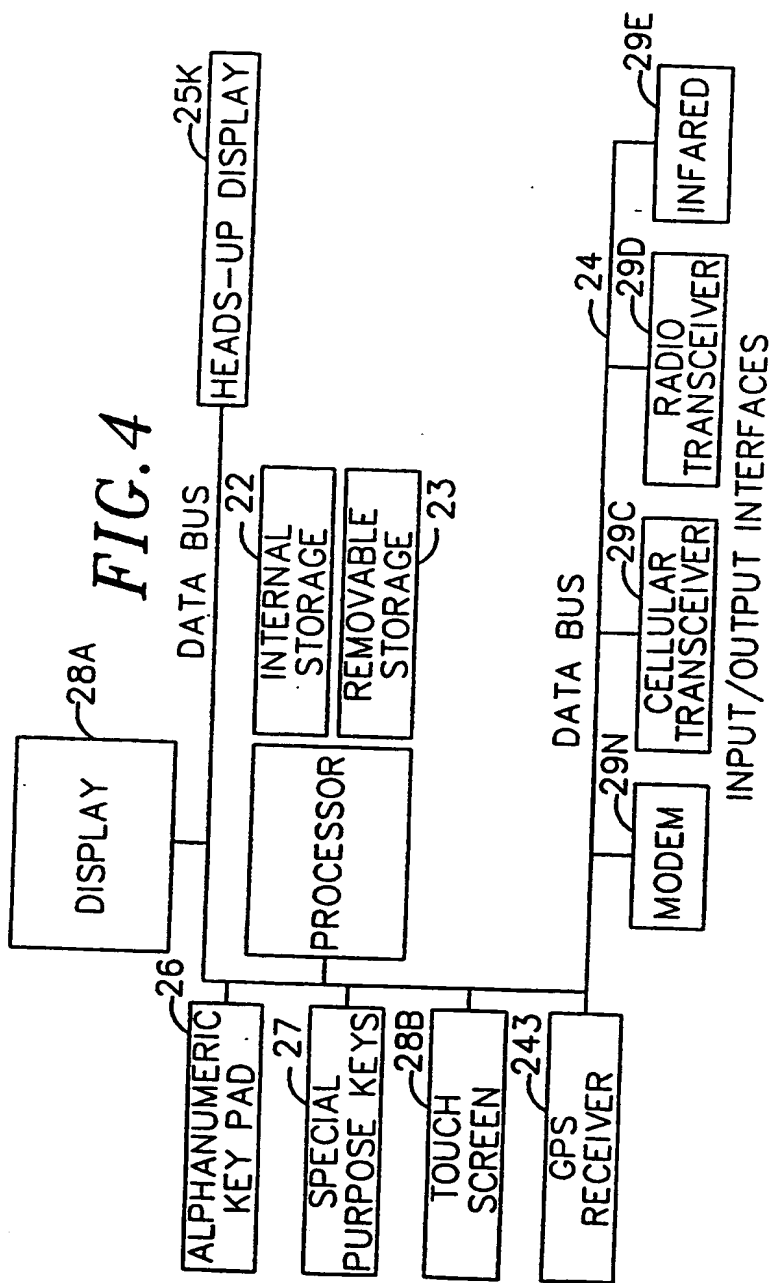


Fig. 3



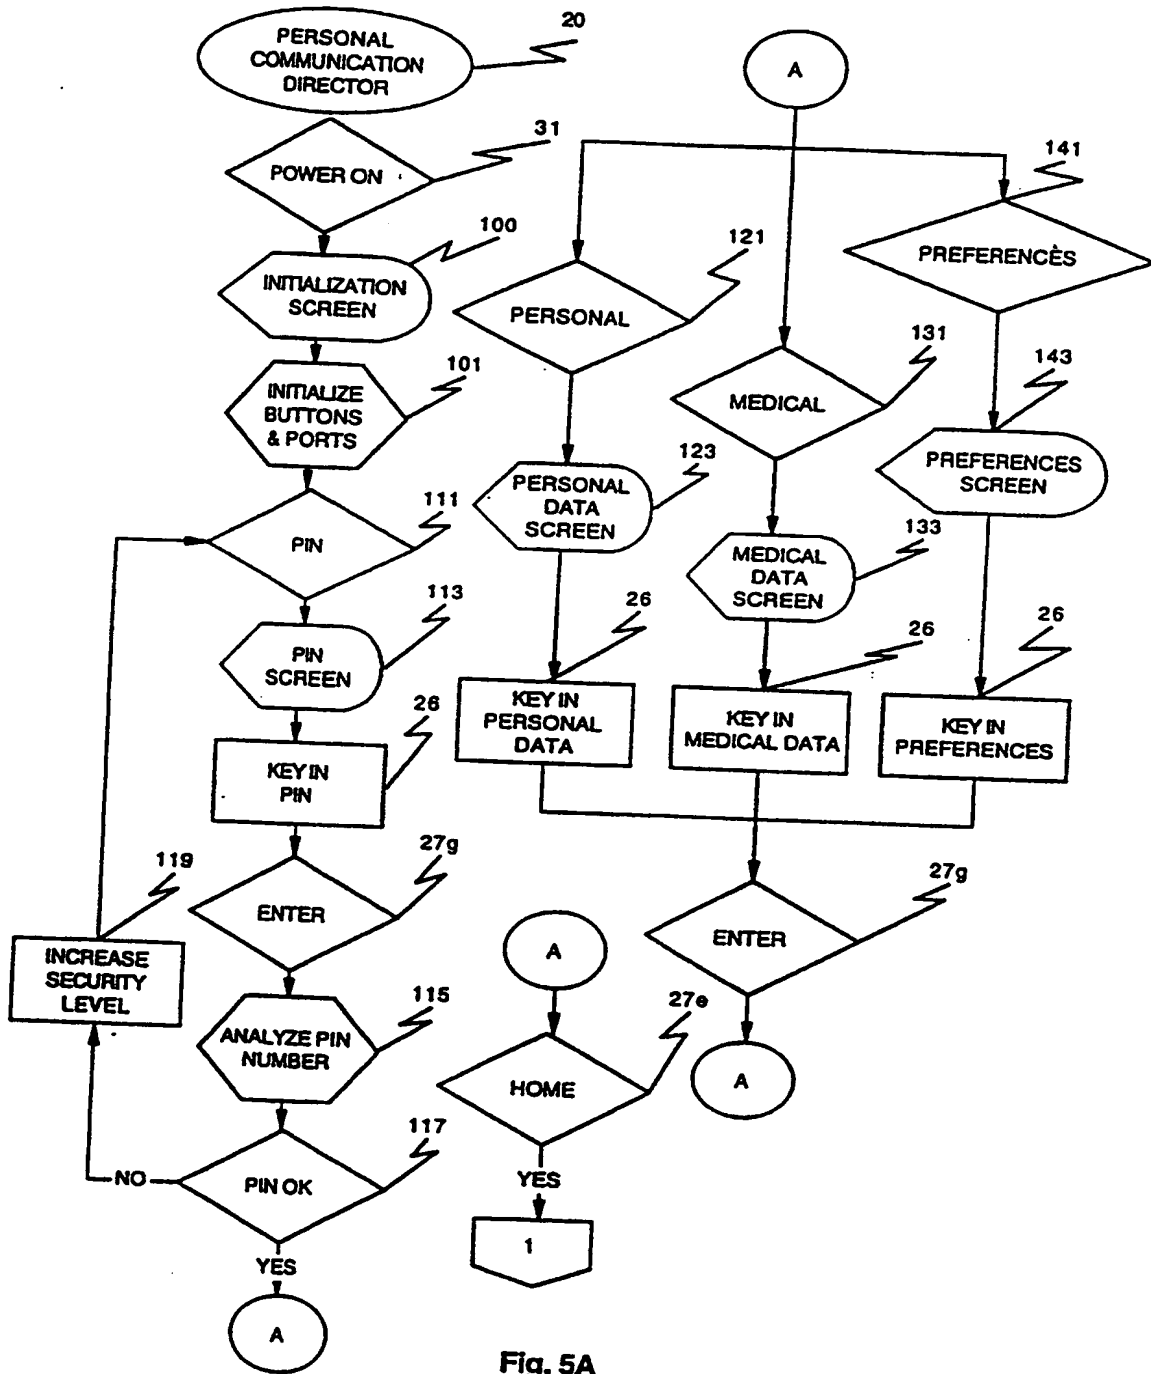


Fig. 5A

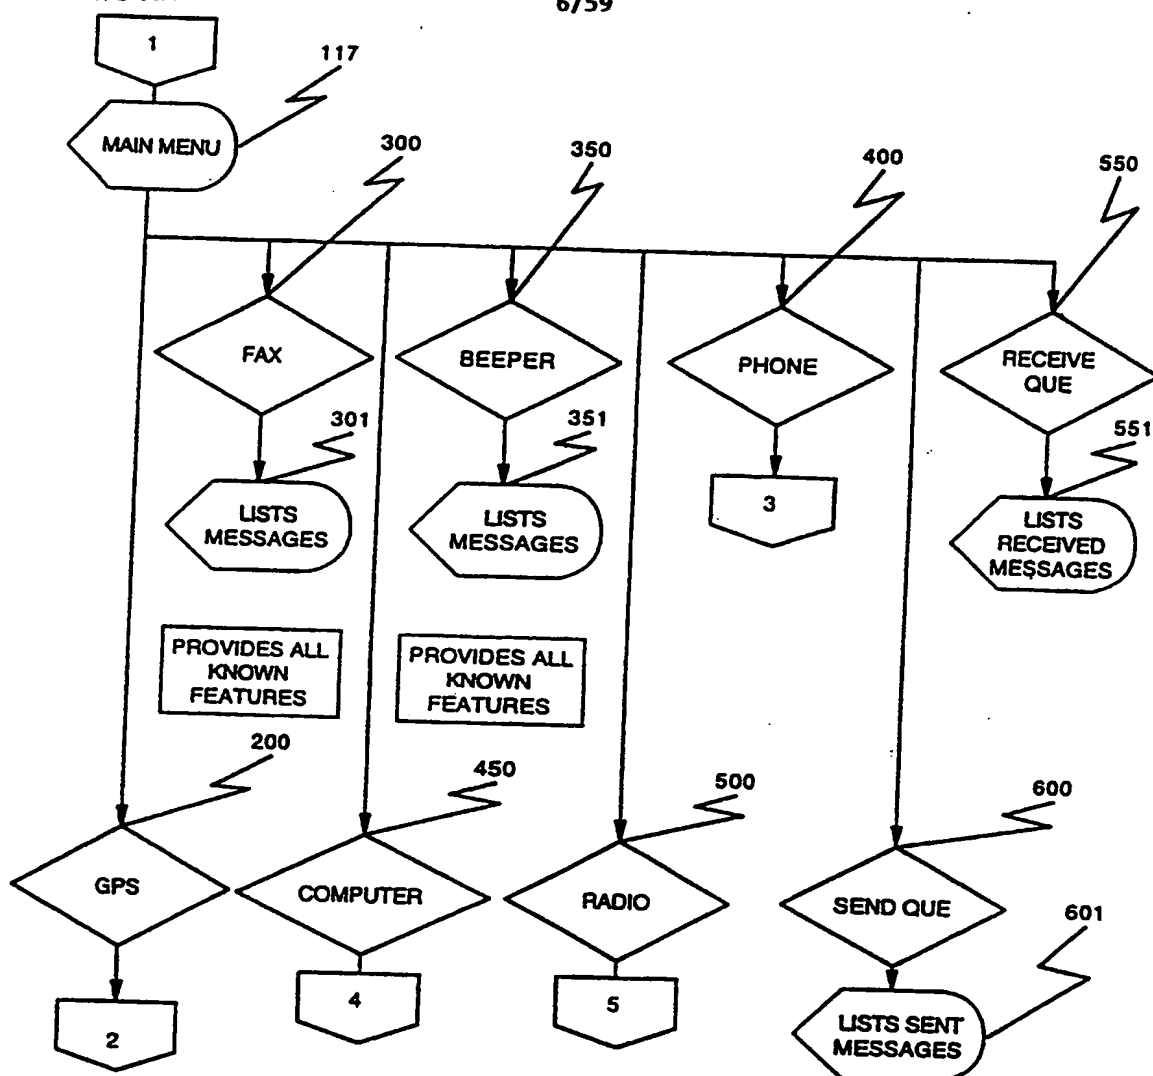


Fig. 5B

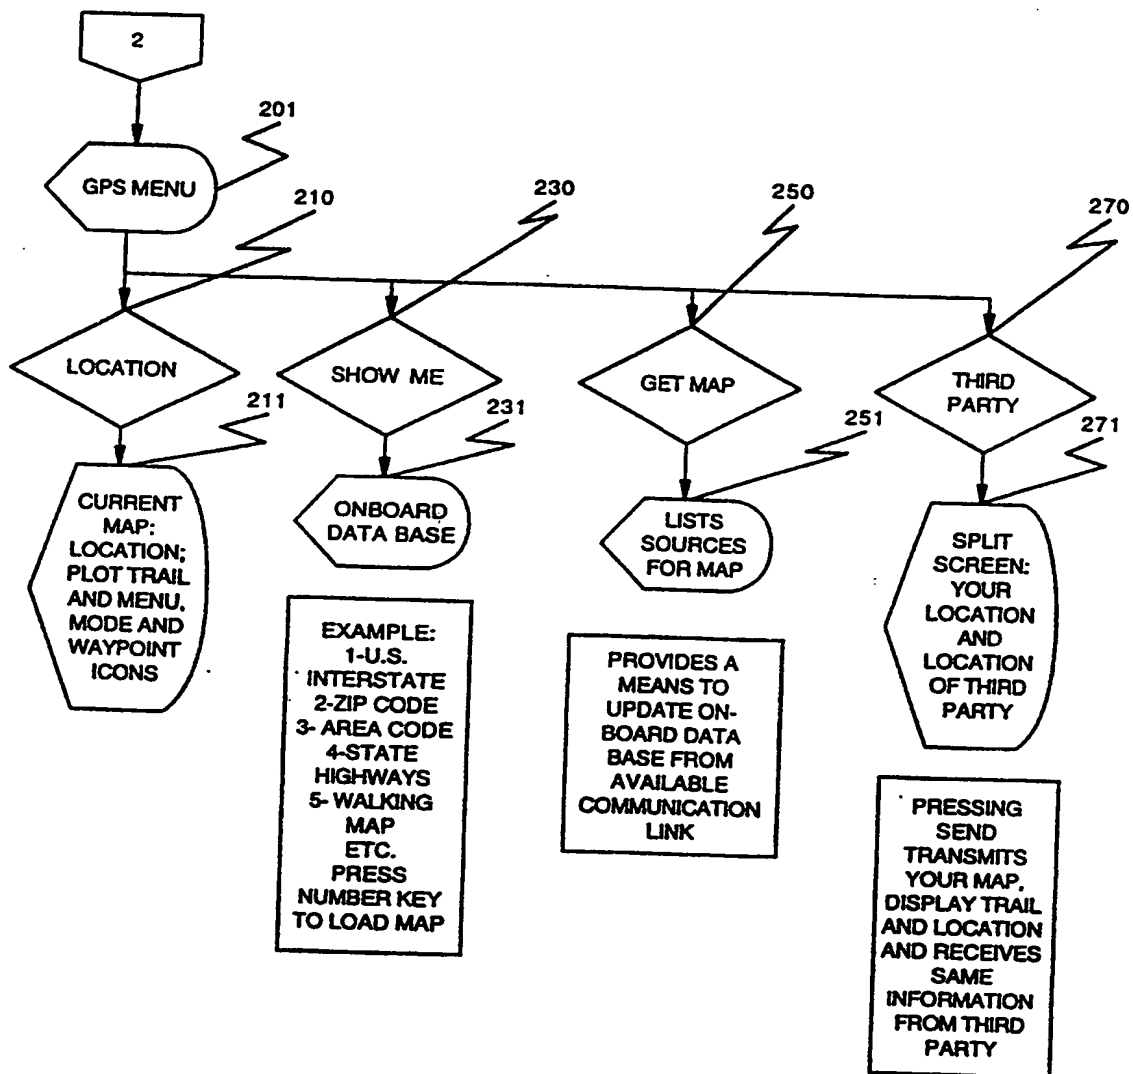


Fig. 5C

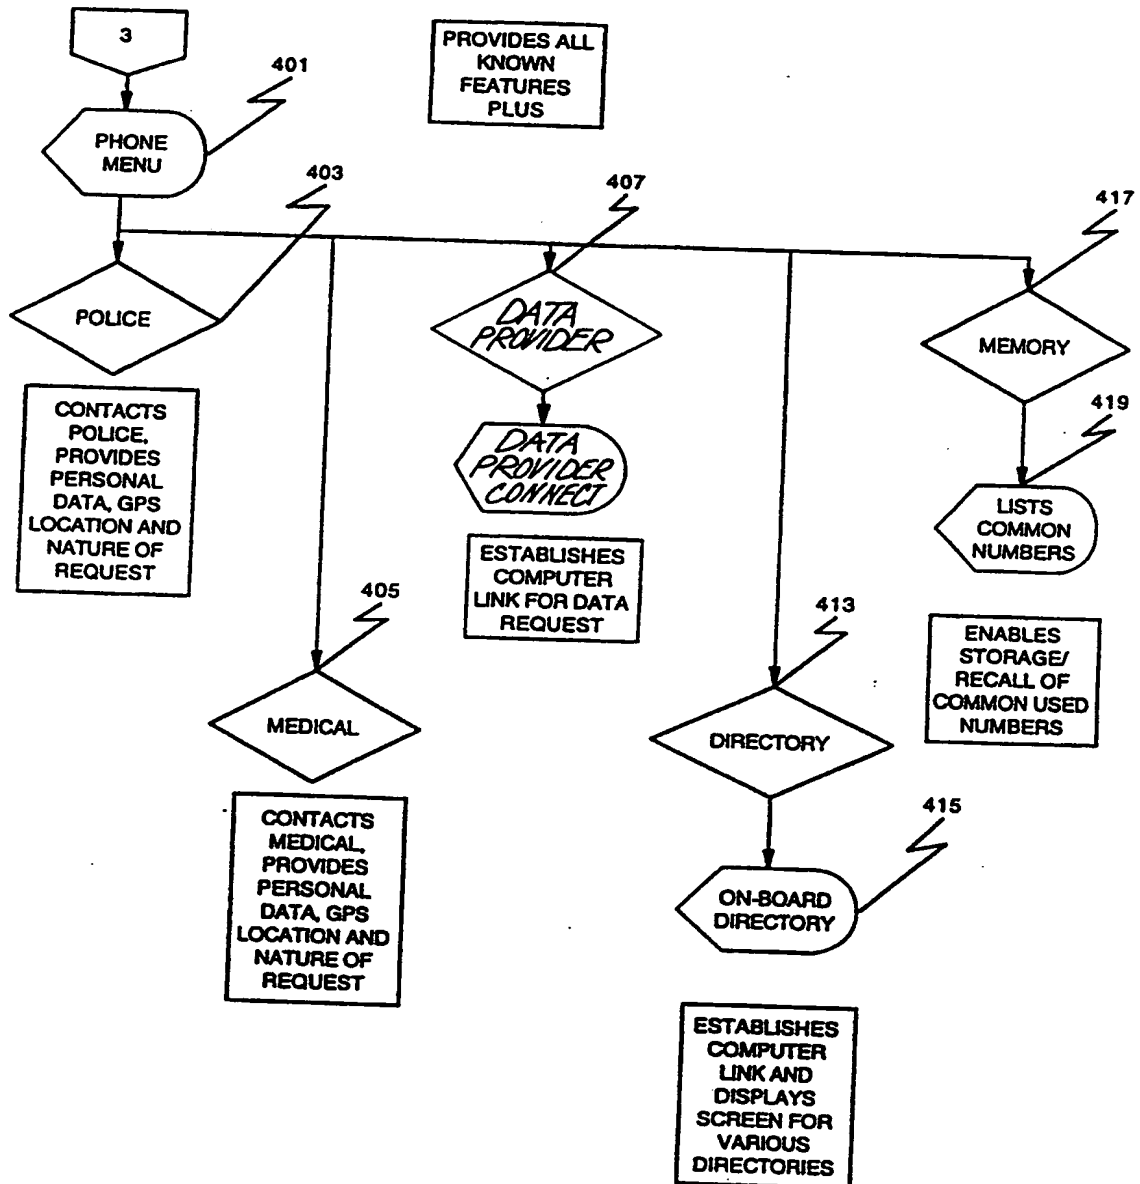


Fig. 5D

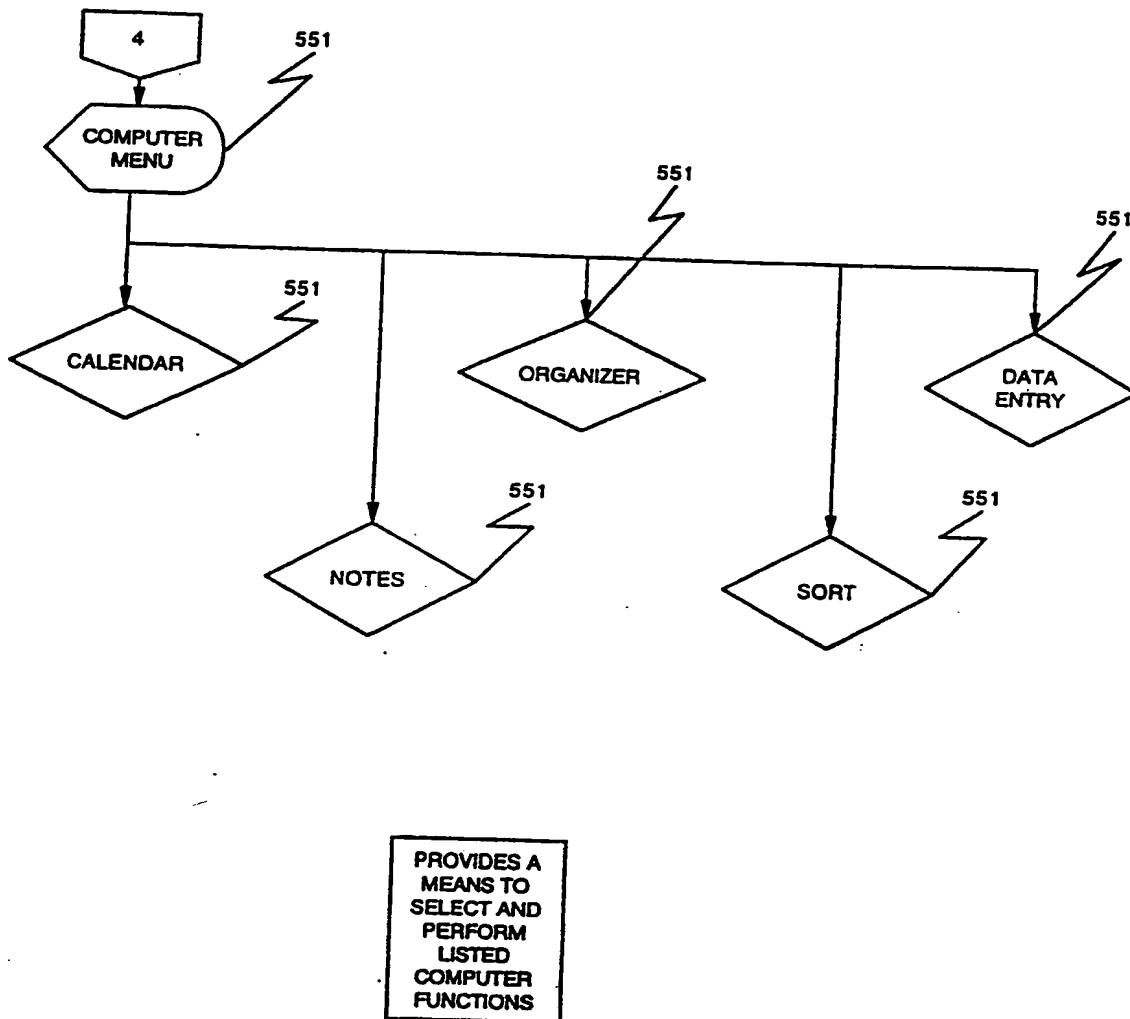


Fig. 5E

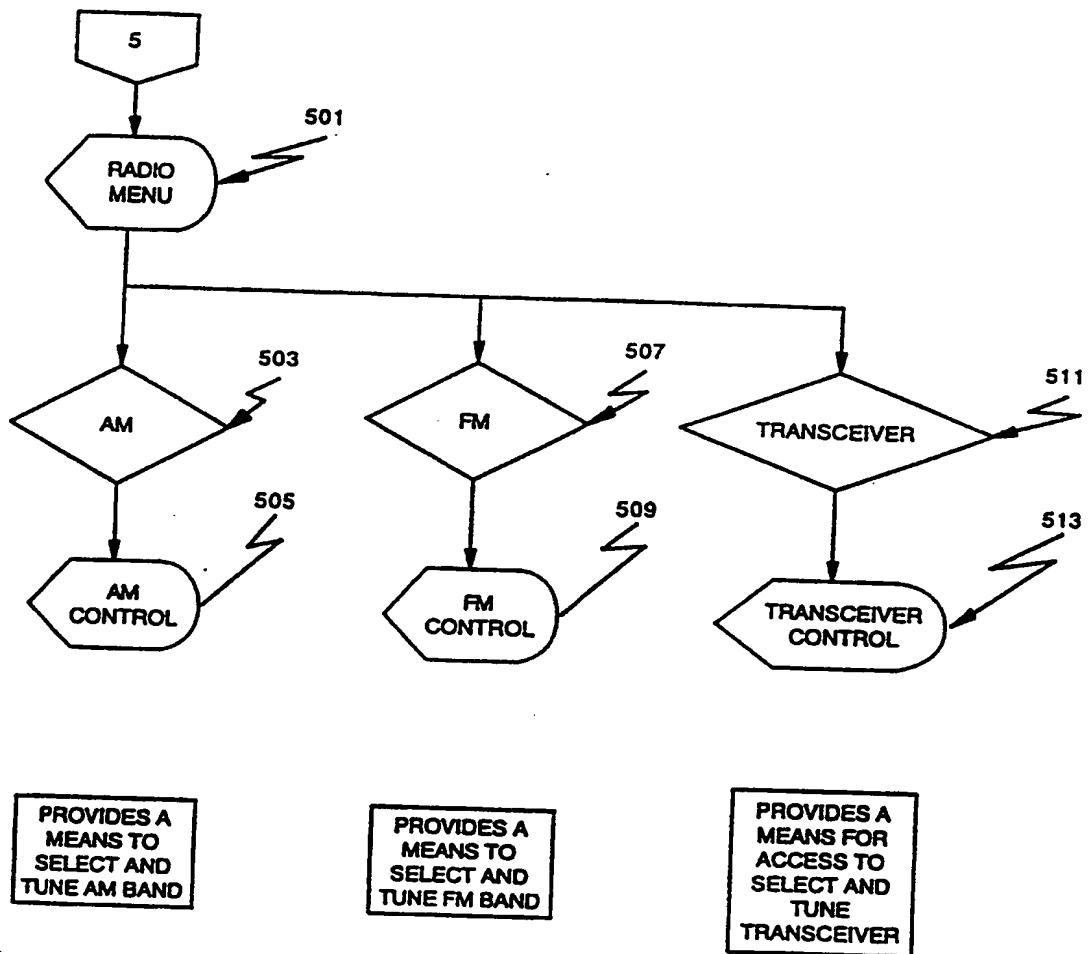


Fig. 5F

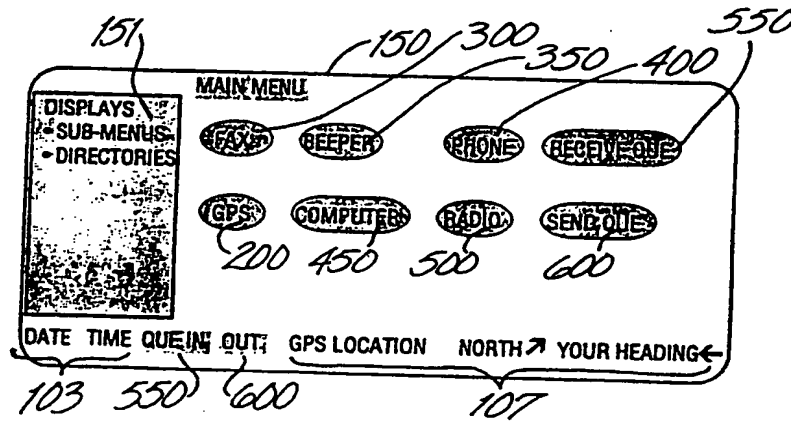


Fig. 6

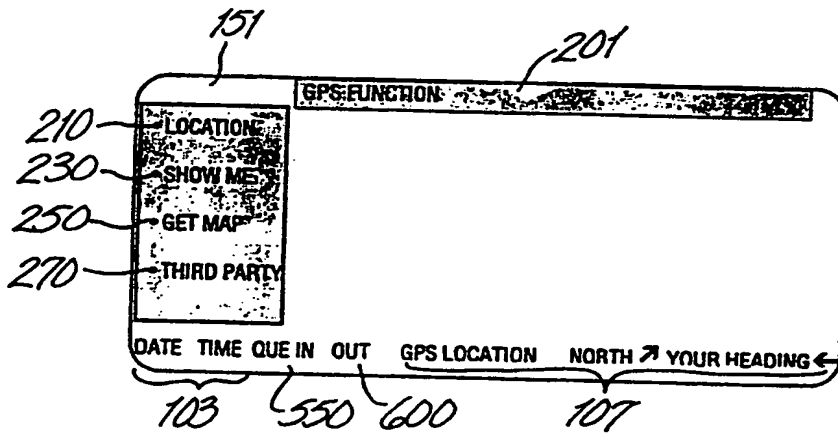


Fig. 7

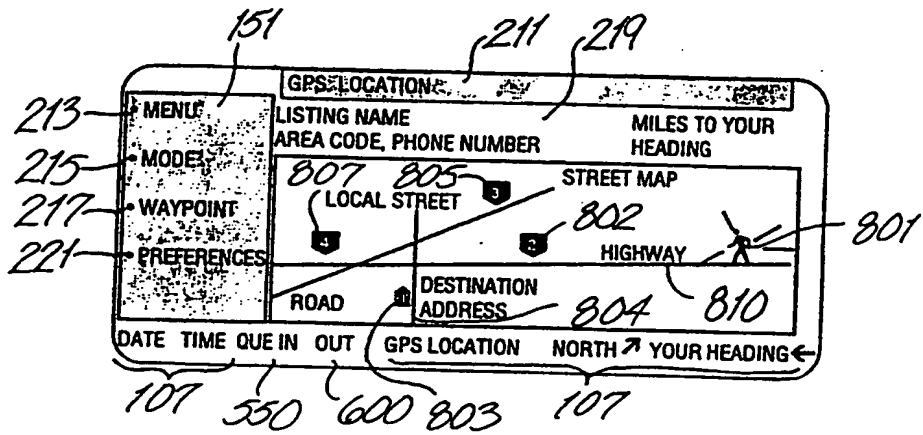


Fig. 8

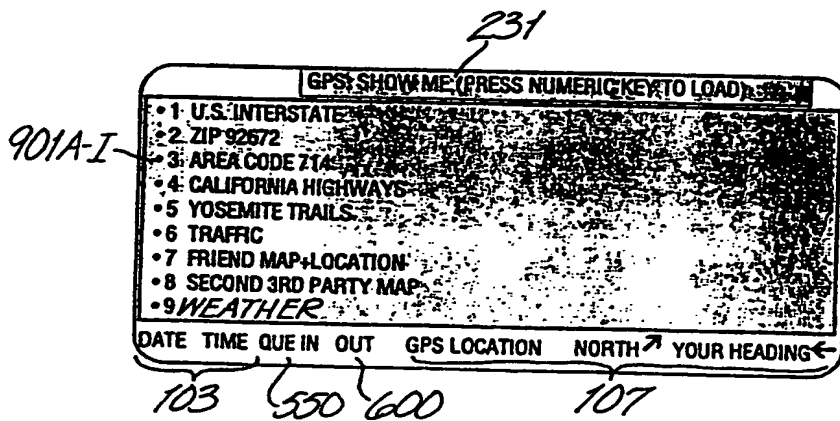


Fig. 9

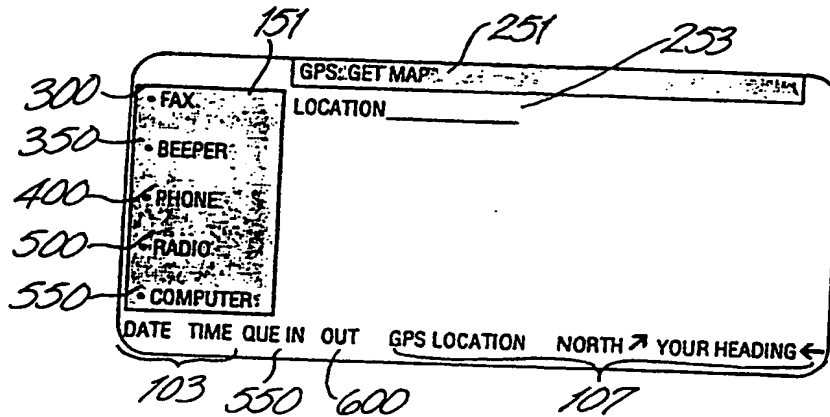


Fig. 10

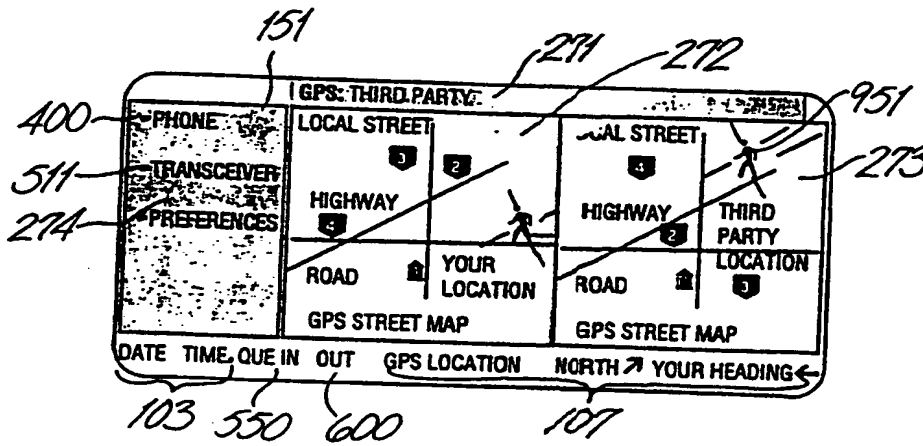


Fig. 11

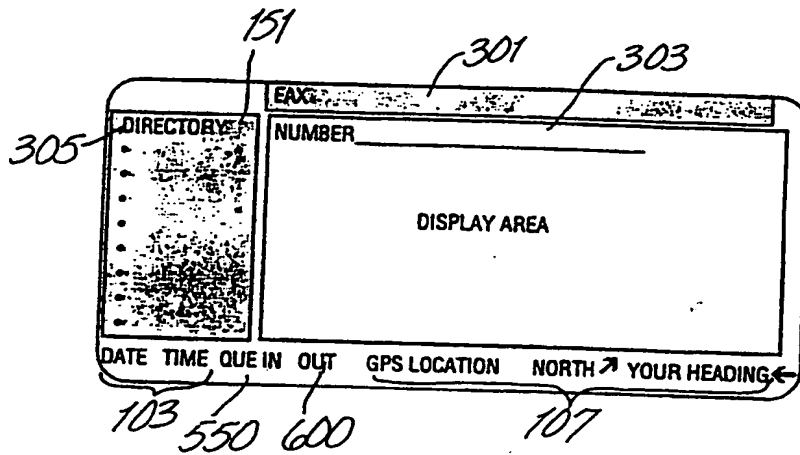


Fig. 12

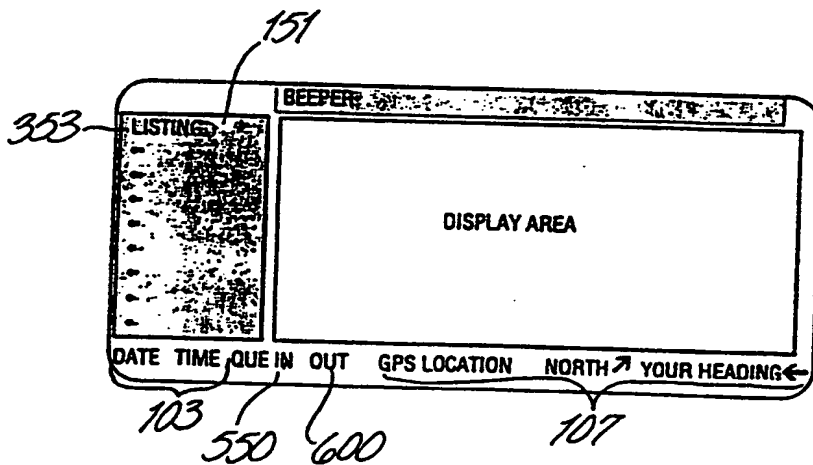


Fig. 13

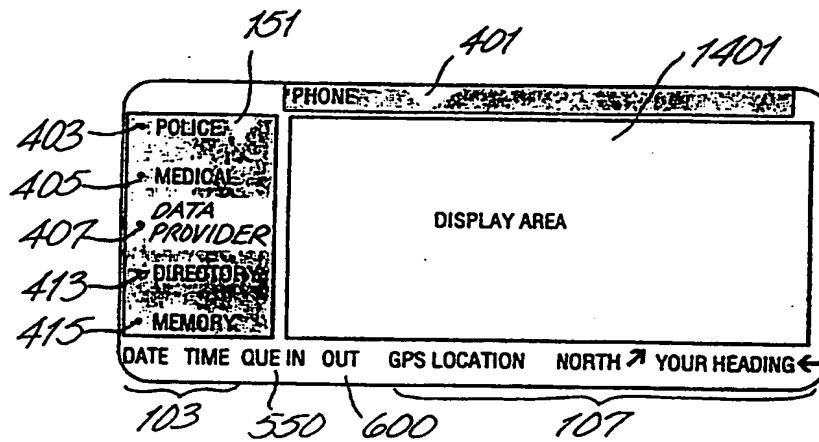


Fig. 14

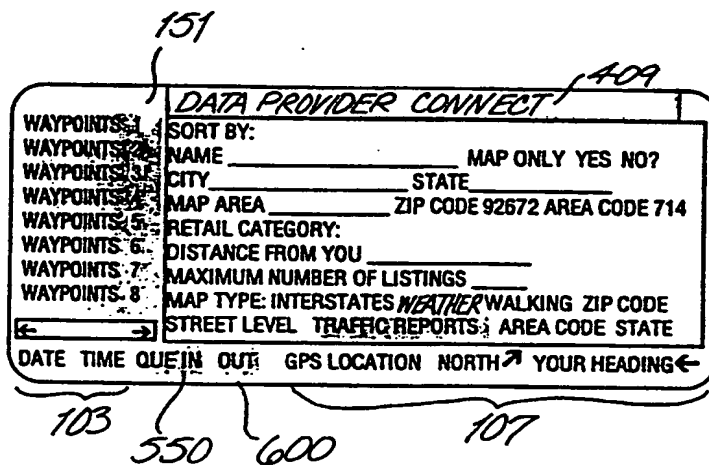


Fig. 15

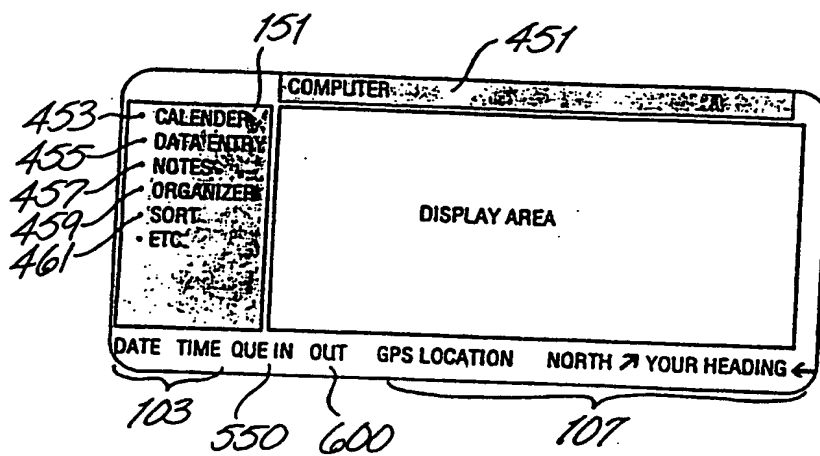


Fig. 16

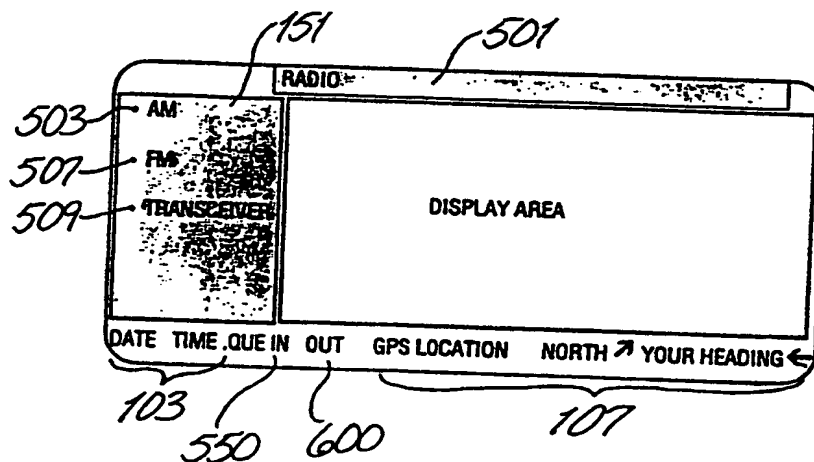


Fig. 17

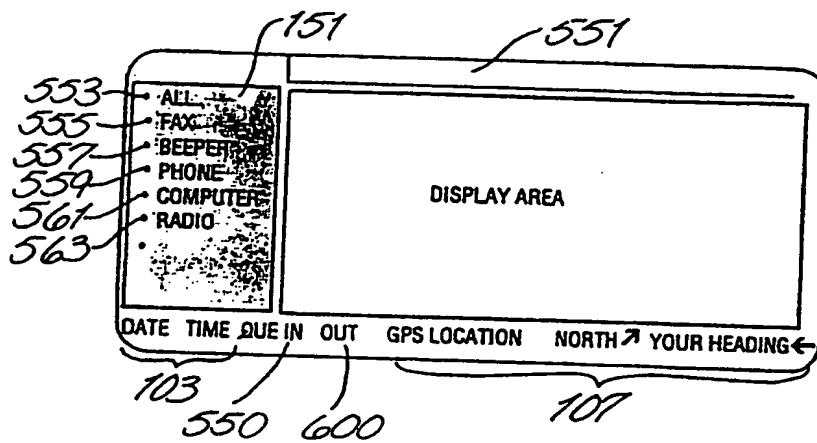


Fig. 18

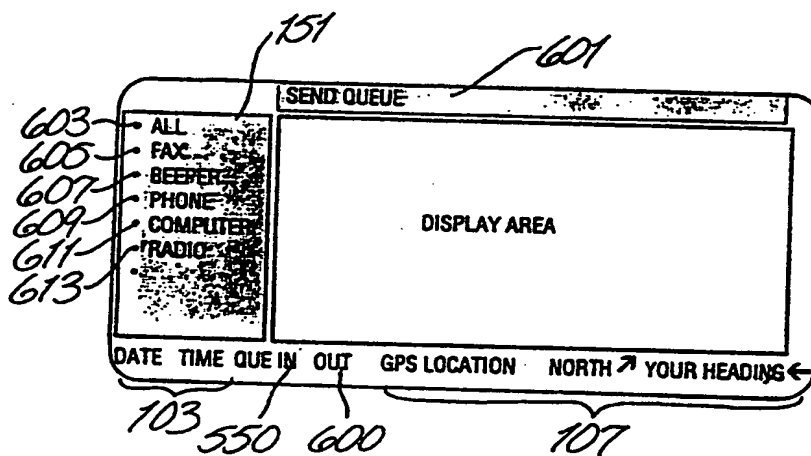


Fig. 19

Listing / Name / Waypoint	Address	City	State	Phone No.	GPS Location North	GPS West	Waypoint
Alex's German-American Restaurant	2801 S. El Camino Real	San Clemente	CA	714-492-8986	33° 24.60	117° 36.25	1
Antoine's Cafe	218 S. El Camino Real	San Clemente	CA	714-492-1763	33° 25.40	117° 37.38	2
Baker's Square Restaurant & Pies	610 Camino De Los Mares	San Clemente	CA	714-661-3100	33° 27.80	117° 39.60	3
Beach Garden Cafe	618 1/2 Avenida Victoria	San Clemente	CA	714-498-8145	33° 25.35	117° 37.36	4
Bootleggers Grill & Speakeasy	111 Ave. Palizada	San Clemente	CA	714-361-8858	33° 25.65	117° 37.85	5
Burbon Street Sandwichery	430 N. El Camino Real	San Clemente	CA	714-492-7827	33° 25.58	117° 37.76	6
Burger Stop	524 Avenida Pico	San Clemente	CA	714-492-2350	33° 25.92	117° 37.12	7
Burrillo Basket, The	2017 S. El Camino Real	San Clemente	CA	714-498-5002	33° 25.10	117° 36.34	8
Cafe Calypso	114 Avenida Del Mar	San Clemente	CA	714-366-9346	33° 25.42	117° 37.42	9
Cafe Espresso	641 Camino De Los Mares	San Clemente	CA	714-240-3467	33° 25.81	117° 37.31	10
Captain Culver Counterculture Natural Foods	149 Avenida Del Mar	San Clemente	CA	714-498-8098	33° 25.39	117° 37.40	11
Carl's Jr. Restaurant	638 Camino De Los Mares	San Clemente	CA	714-493-0189	33° 27.65	117° 39.45	12
Carl's Jr. Restaurant	3929 S. El Camino Real	San Clemente	CA	714-498-5641	33° 24.50	117° 35.95	13
Carrows Restaurants	620 Avenida Pico	San Clemente	CA	714-492-4290	33° 25.85	117° 37.10	14
China Beach Canteen	2369 S. El Camino Real	San Clemente	CA	714-492-6228	33° 27.80	117° 37.15	15
China Well Restaurant	620 Camino De Los Mares	San Clemente	CA	714-661-6813	33° 27.61	117° 39.42	16
Coco's Family Restaurant	2350 S. El Camino Real	San Clemente	CA	714-498-1542	33° 24.90	117° 36.18	17
Corky's Cafe	2727 Via Cascadita	San Clemente	CA	714-492-1135	33° 25.10	117° 37.48	18
Courtside Restaurant	111 Ave. Vista Montana	San Clemente	CA	714-361-2211	33° 25.10	117° 36.10	19
Dave's Mexican Restaurant	1701 N. El Camino Real	San Clemente	CA	714-492-7867	33° 25.50	117° 38.90	20
Del Taco	109 Calle De Industrias	San Clemente	CA	714-492-5311	33° 25.51	117° 36.50	21
Denny's Restaurant	529 Avenida Pico	San Clemente	CA	714-492-2382	33° 25.48	117° 36.15	22
Doninoes Pizza	1502 N. El Camino Real	San Clemente	CA	714-498-9002	33° 25.25	117° 37.50	23
Eastern Winds	201 N. El Camino Real	San Clemente	CA	714-492-3008	33° 25.01	117° 37.05	24
El Camino Tacos	420 S. El Camino Real	San Clemente	CA	714-366-8358	33° 25.10	117° 37.25	25
El Jefe cafe	106 E. Escalones	San Clemente	CA	714-492-4010	33° 25.25	117° 37.03	26
El Mirador	301 N. El Camino Real	San Clemente	CA	714-366-0855	33° 25.08	117° 37.10	27

Fig. 20




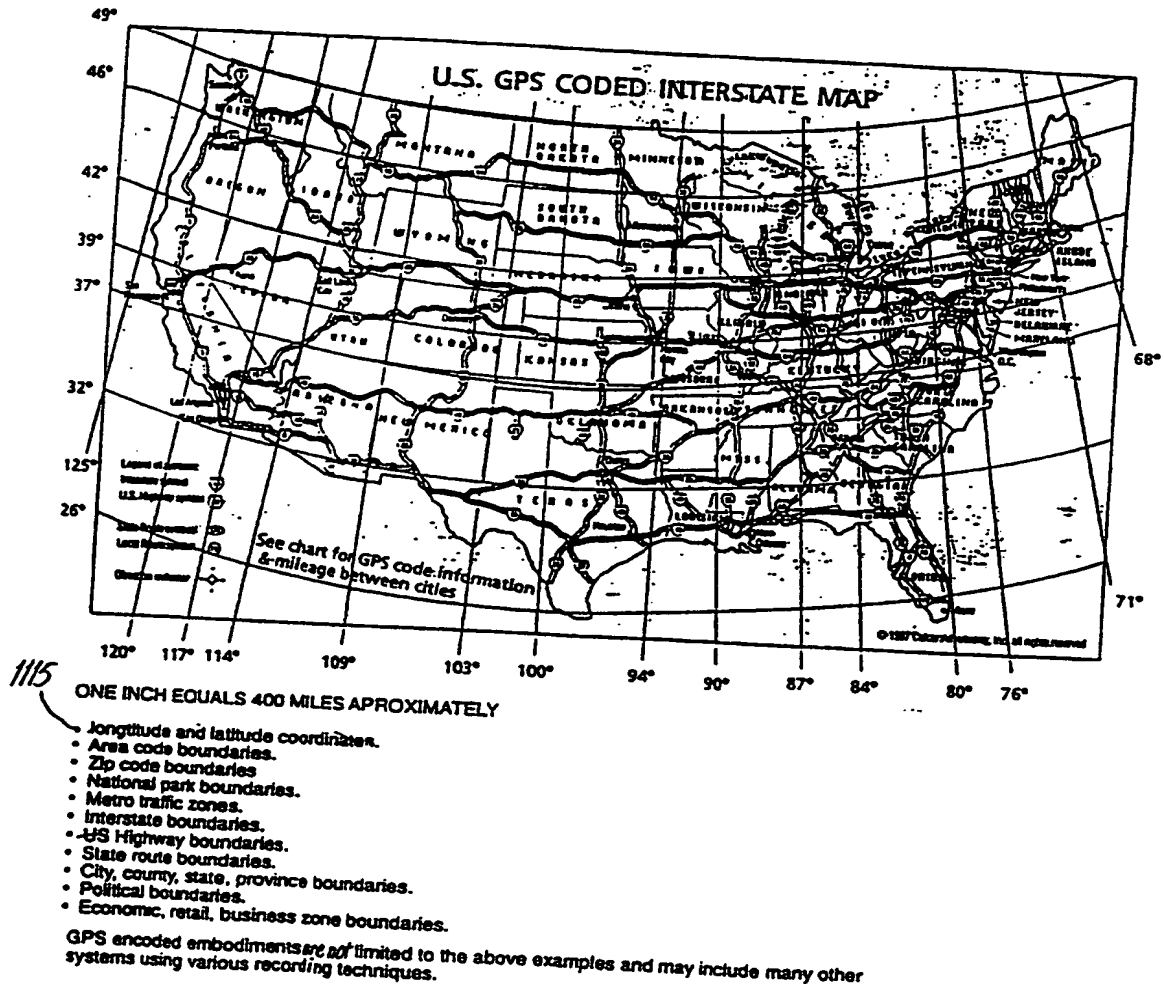



Fig. 21

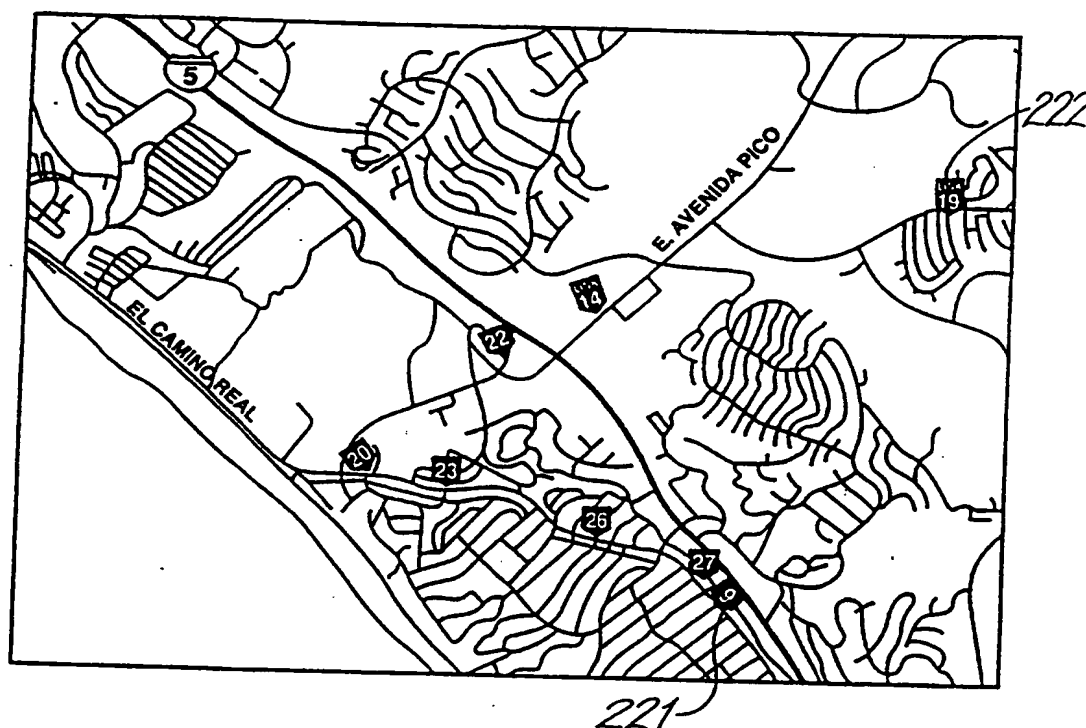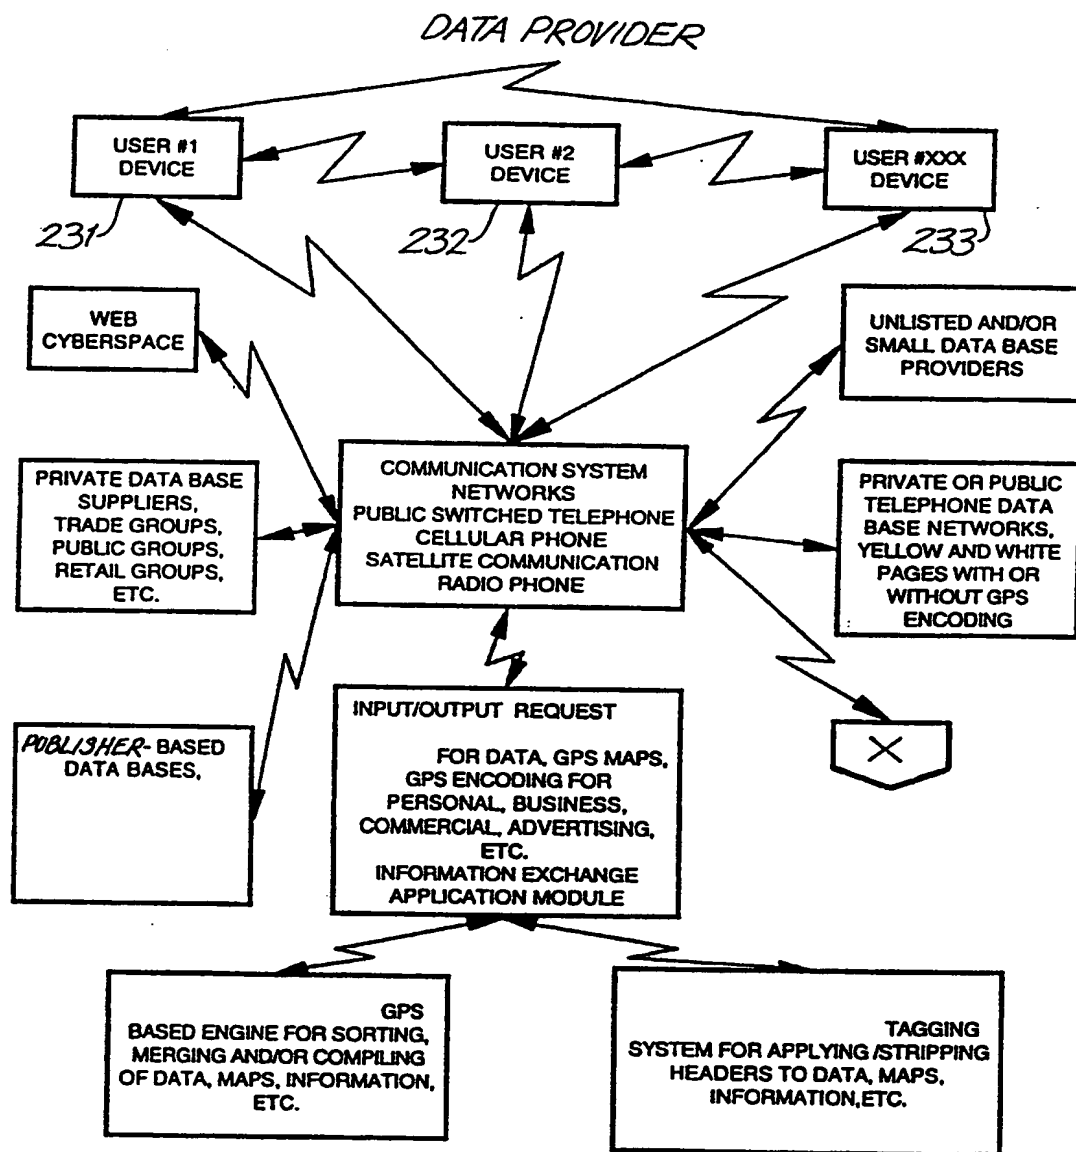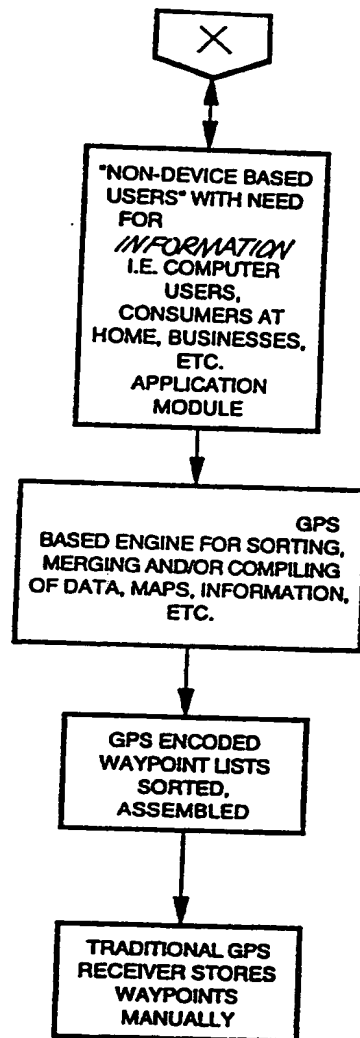


**Fig. 22**

**Fig. 23A**

**Fig. 23B**

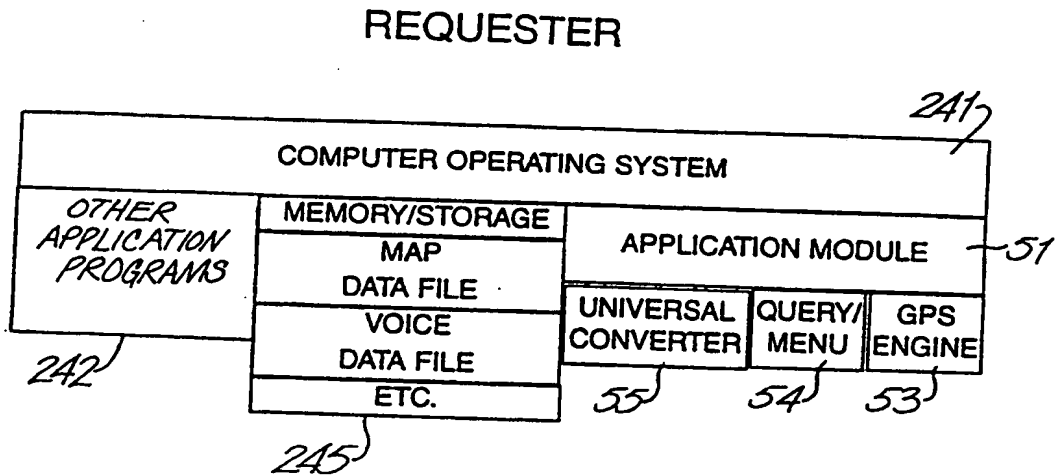**Fig. 24**

## PROVIDER

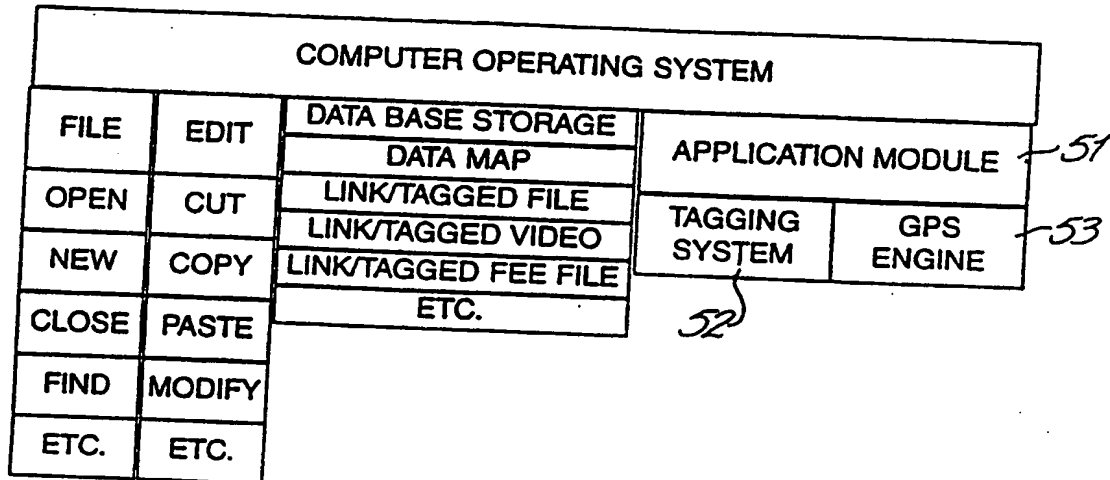**Fig. 25**

## APPLICATION MODULE

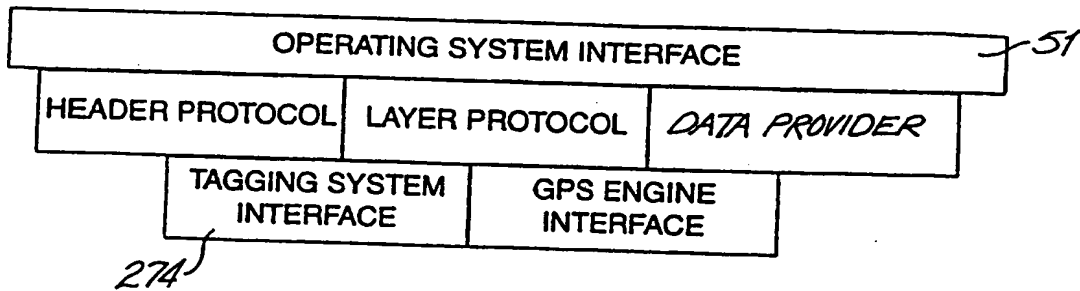


Fig. 26

## TAGGING SYSTEM

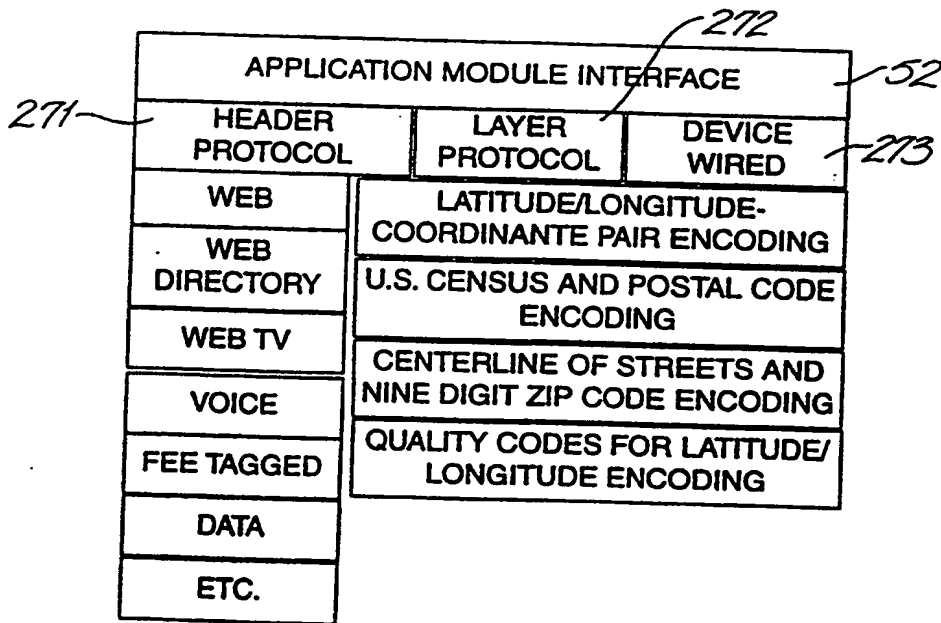



Fig. 27

## GPS ENGINE


APPLICATION MODULE INTERFACE		
HEADER PROTOCOL	LAYER SYSTEM	ACCESS LATITUDE/LONGITUDE QUALITY CODES FOR BEST DISPLAY SCALES
TAG TYPE	LAYER PROTOCOL	
LATITUDE/ LONGITUDE	ROUTE PLANNING	USE SPATIAL QUERY FUNCTIONS
RADIUS		USE CENTROID INTERPOLATION FUNCTIONS
MAP		USE MATCH-RATE COMPARISON FUNCTIONS
WAYPOINT LINKS		
ETC.		

**Fig. 28**


# UNIVERSAL TRANSLATOR

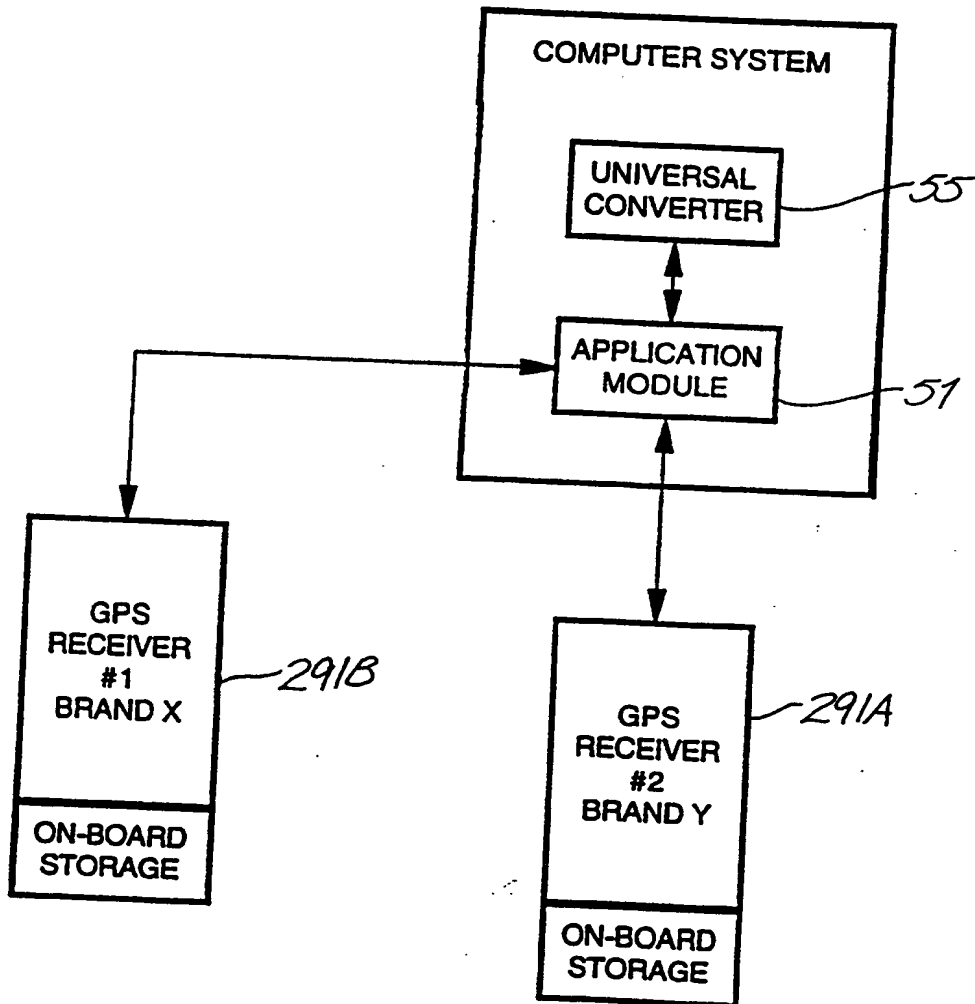

**Fig. 29**

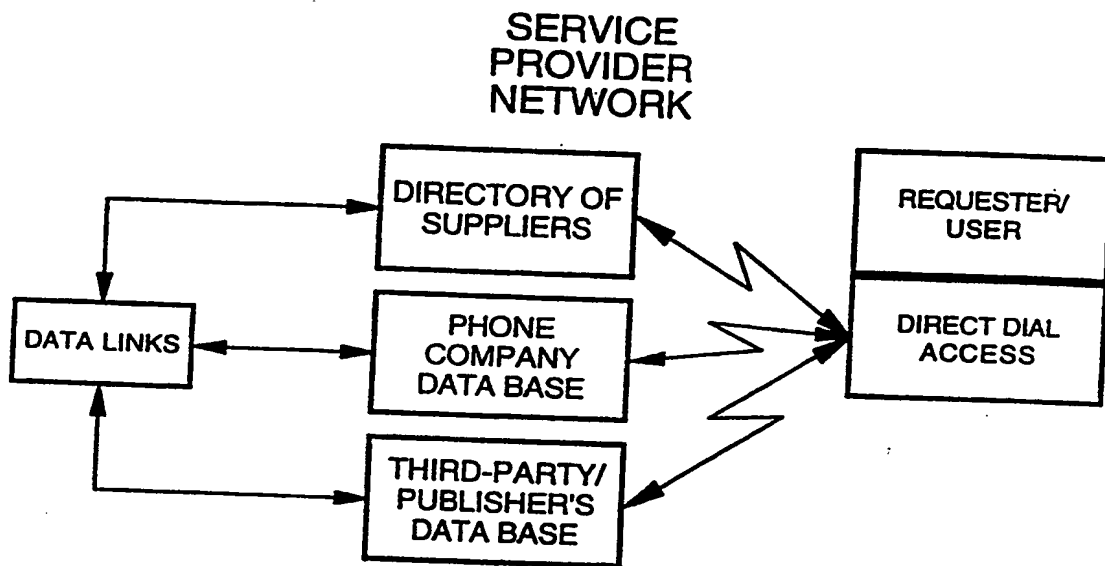**Fig. 30**

## DIGITAL WEB TV

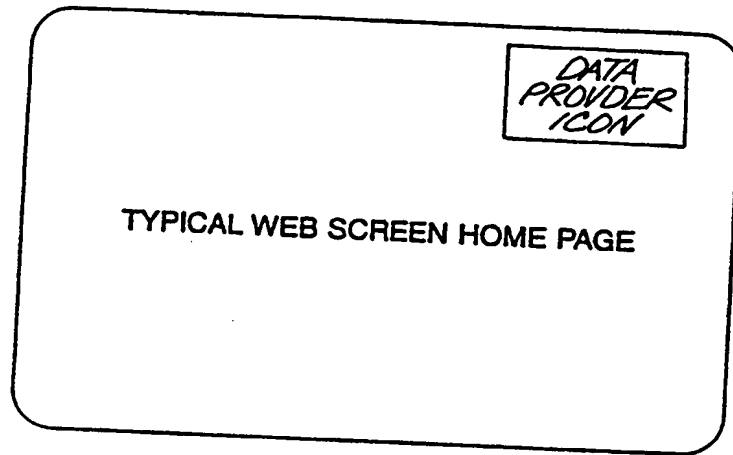

**Fig. 31**

*321A-M*

US SATELLITE RADAR CURRENT DELTA RADAR LOCAL RADAR SURFACE MAPS WIND CHILL CURRENT TEMPS. JET STREAM TRAVEL HAZARDS FORECASTS SURFACE WINDS FARM SHORT RANGE	<b>WEATHER MAP PROVIDER (PRESS TO UPDATE)</b> CENTER MAP BY: CITY _____ STATE _____ LAYER MAPS _____ ZIP CODE _____ AREA CODE _____ DISTANCE FROM YOU _____ MILES/KILOMETERS DISTANCE FROM _____ MILES MAP TYPE: (PRESS TO SELECT FROM LIST) UPDATE MAP LIST @ _____ HOUR UPDATE EVERY _____ HOUR, PROMPT Y/N ? ANIMATE MAPS Y/N PLAY NAVIGATE MAP Y/N
DATE TIME <b>QUE IN</b> <b>OUT</b>	GPS LOCATION NORTH ↗ YOUR HEADING ↖

*107*

FIGURE 32


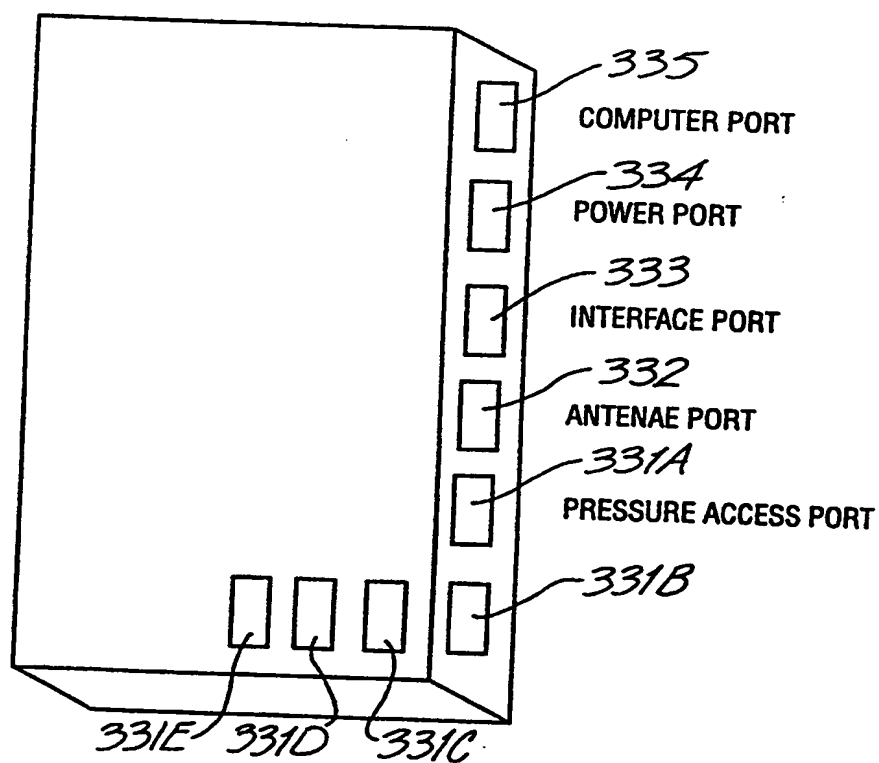


FIGURE 33

Fig. 34

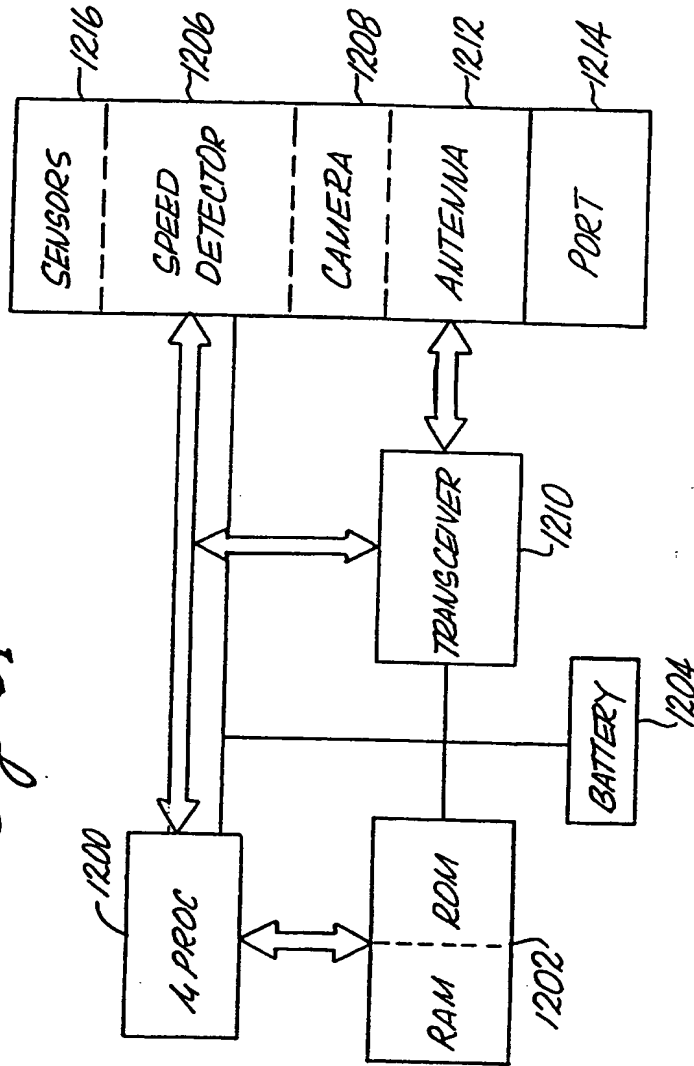



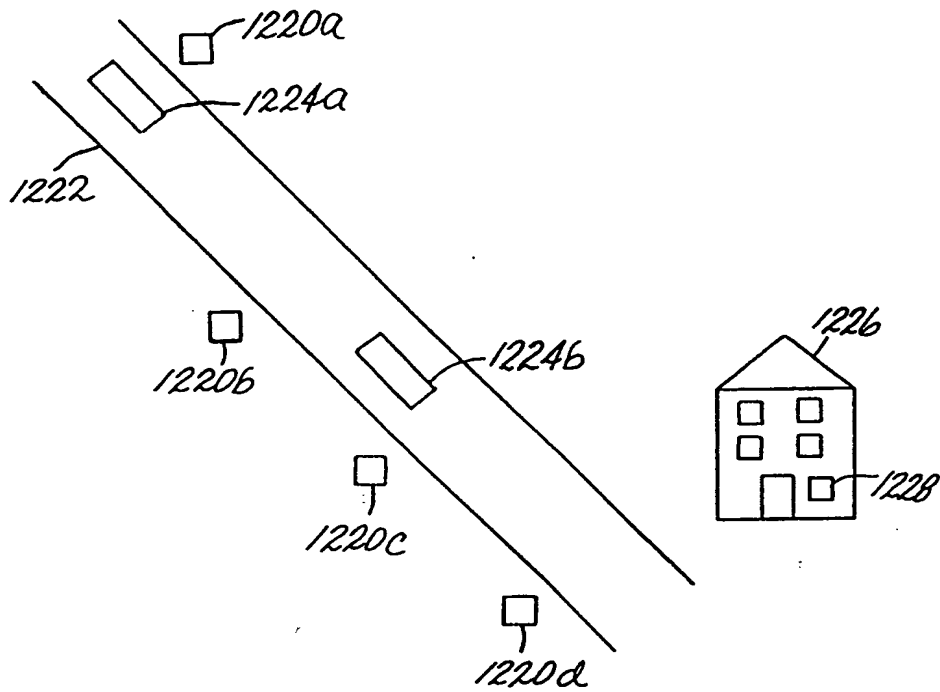
*Fig. 35*

Fig. 36

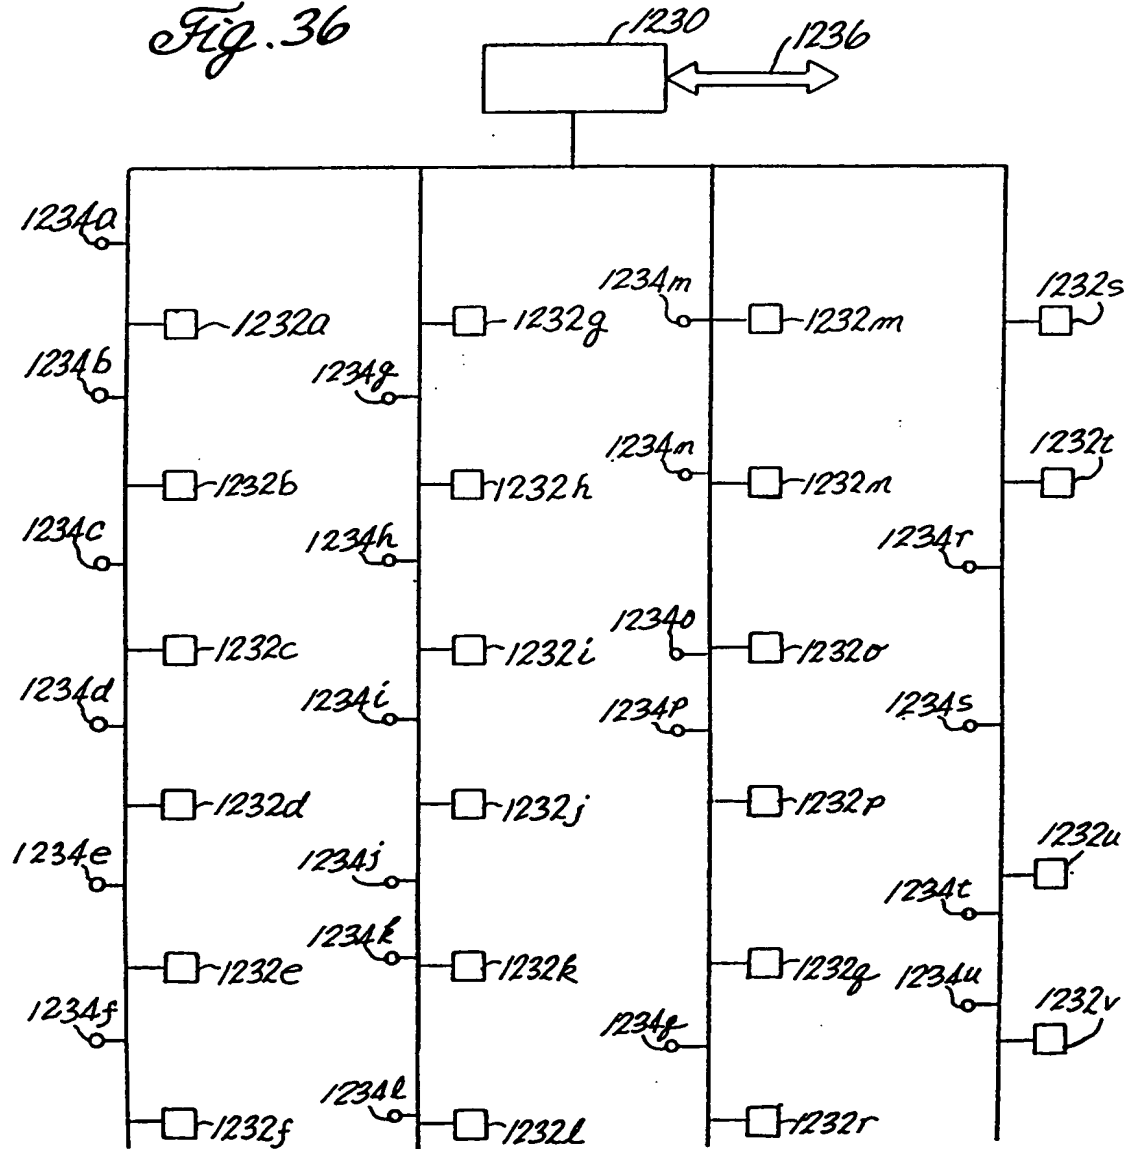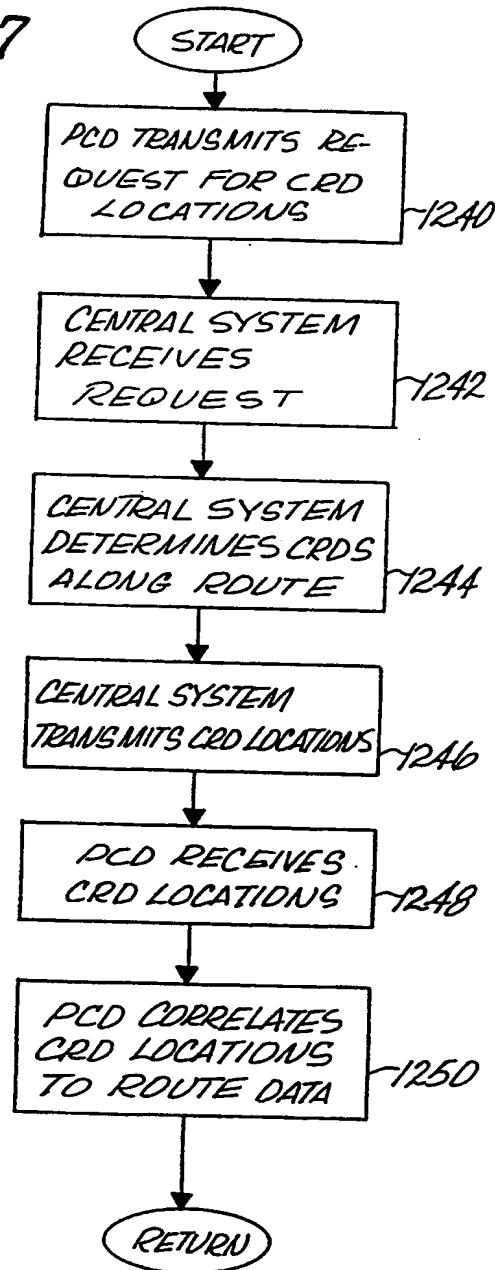

*Fig. 37*


*Fig. 38*

Fig. 39









FIG. 40



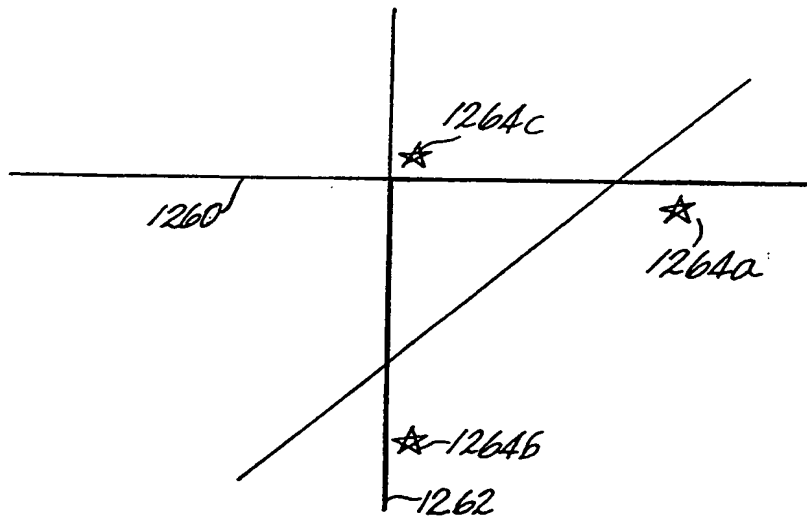



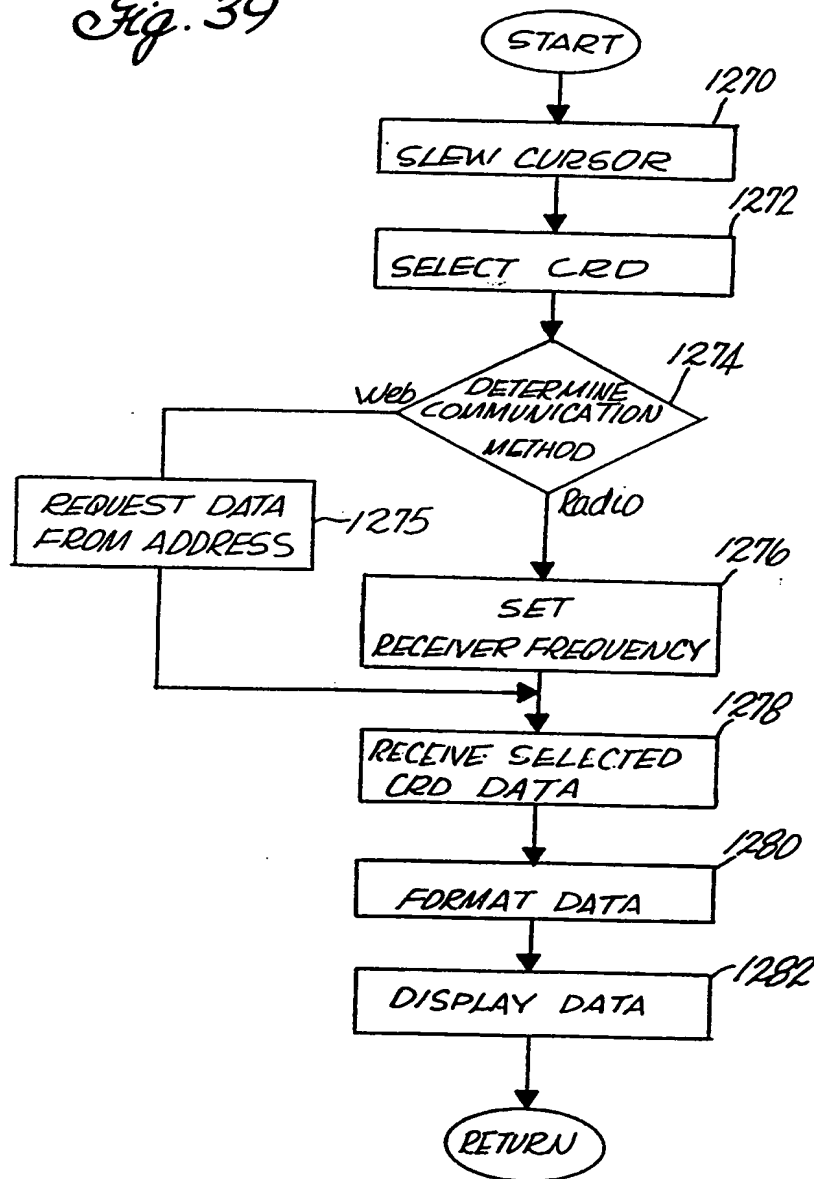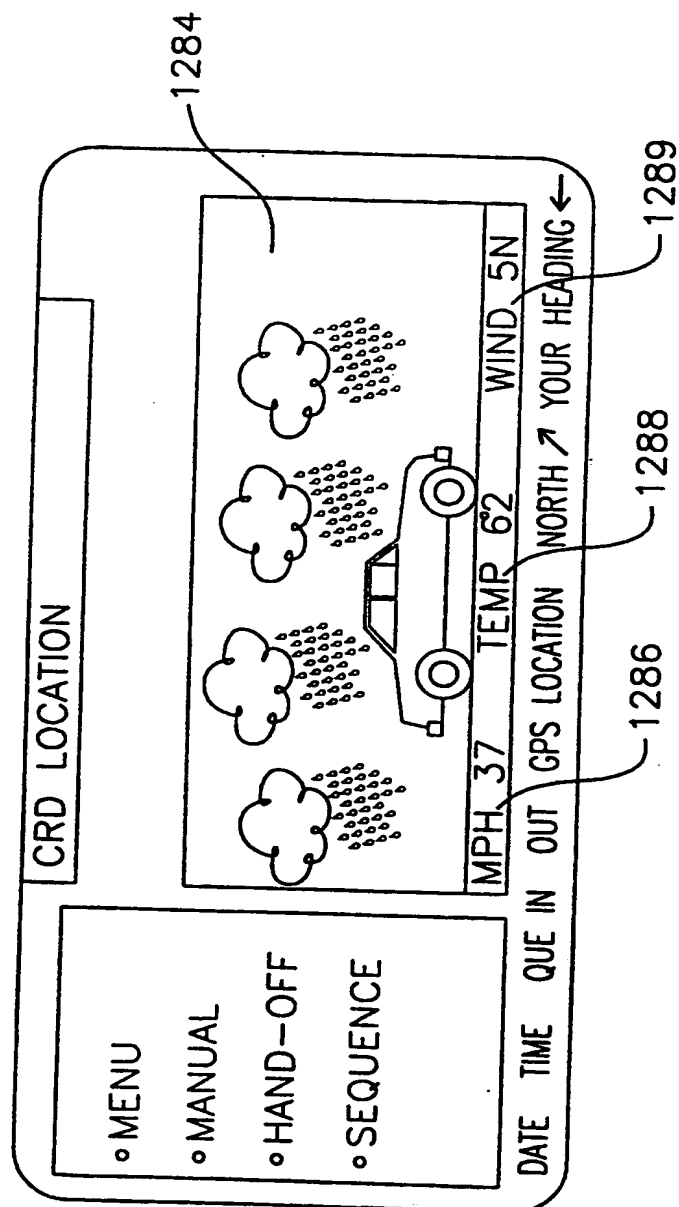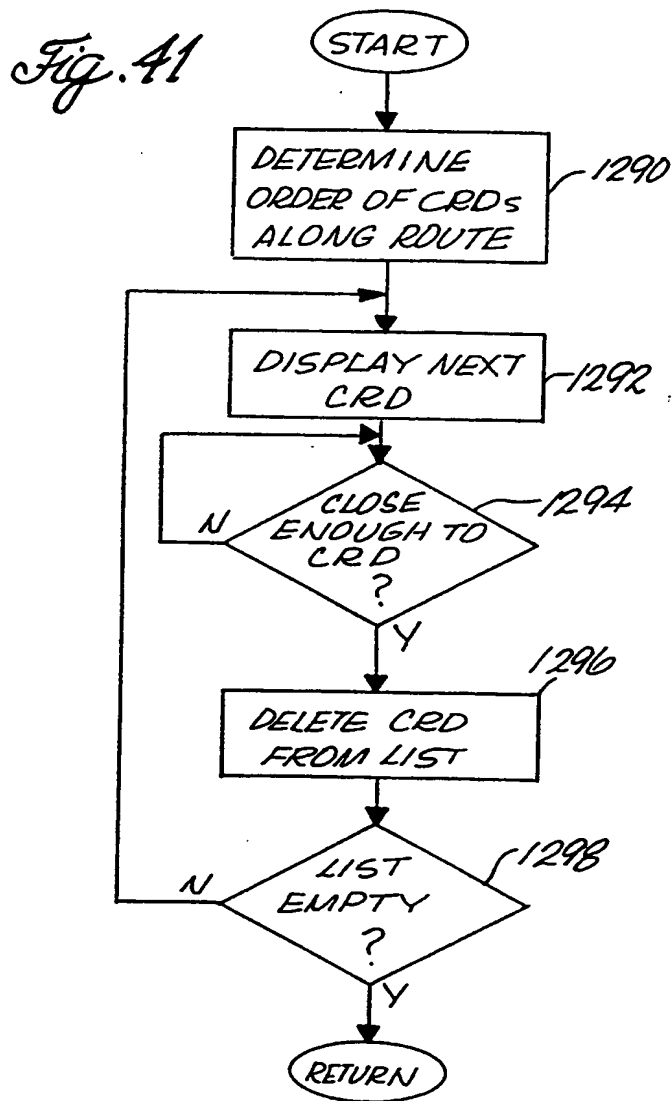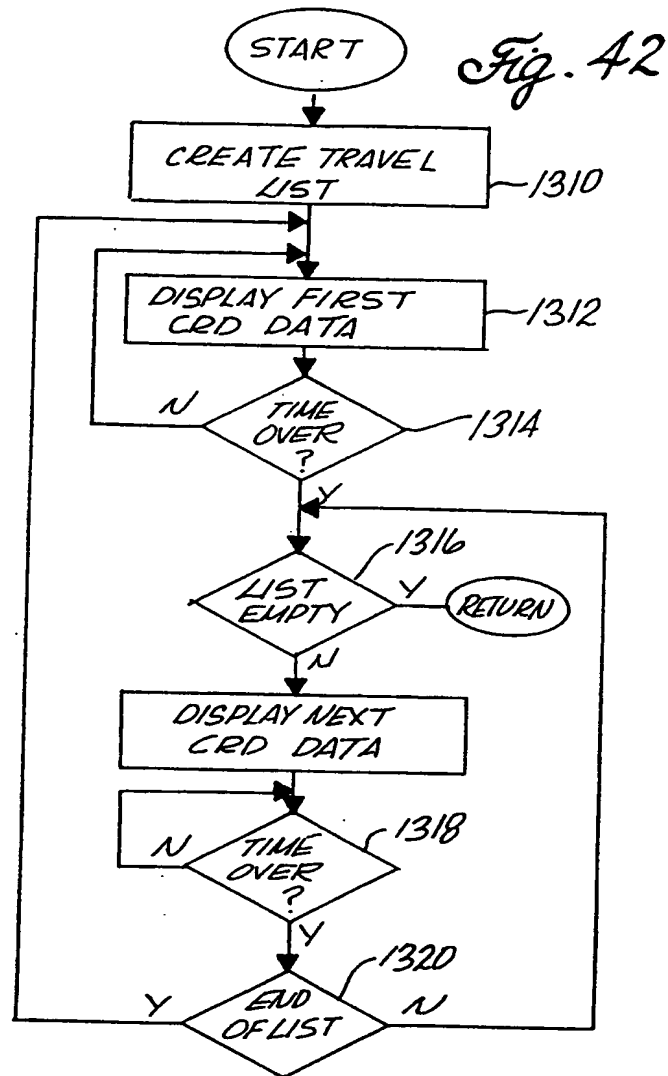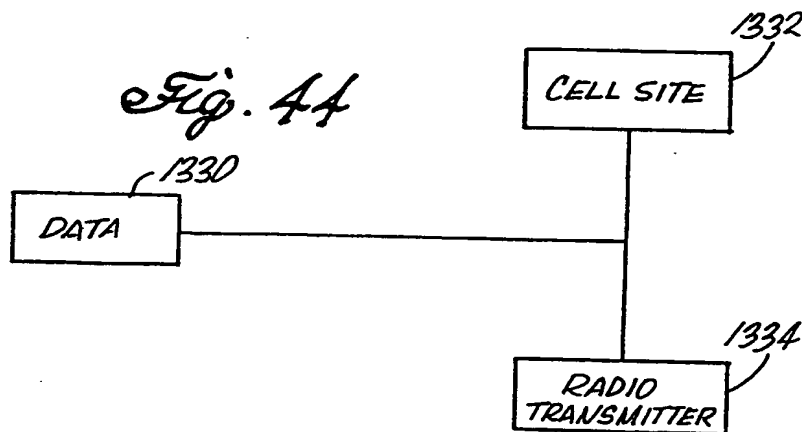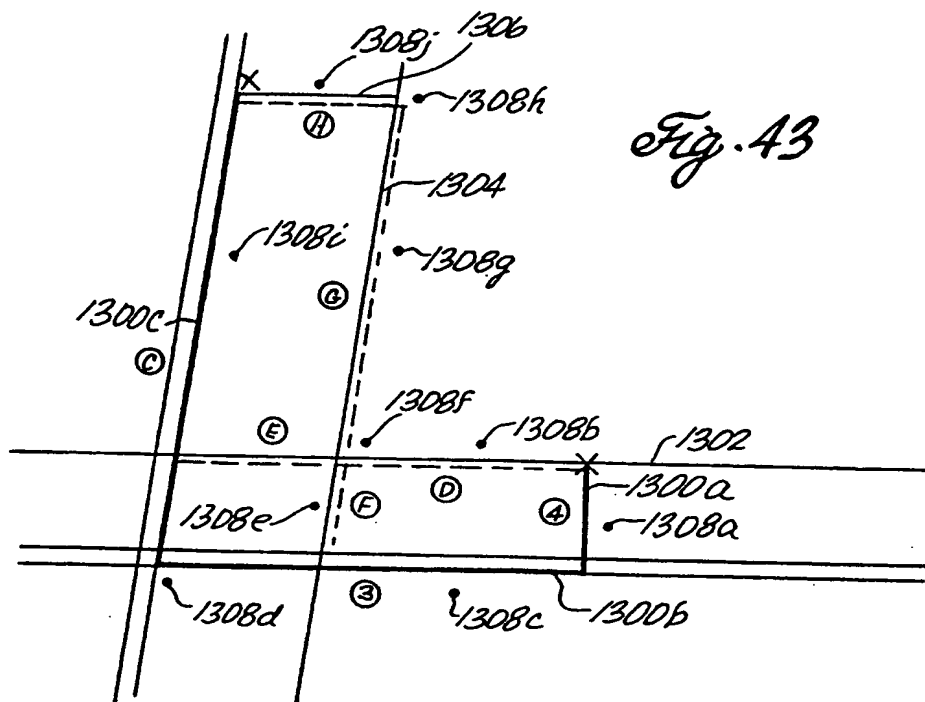

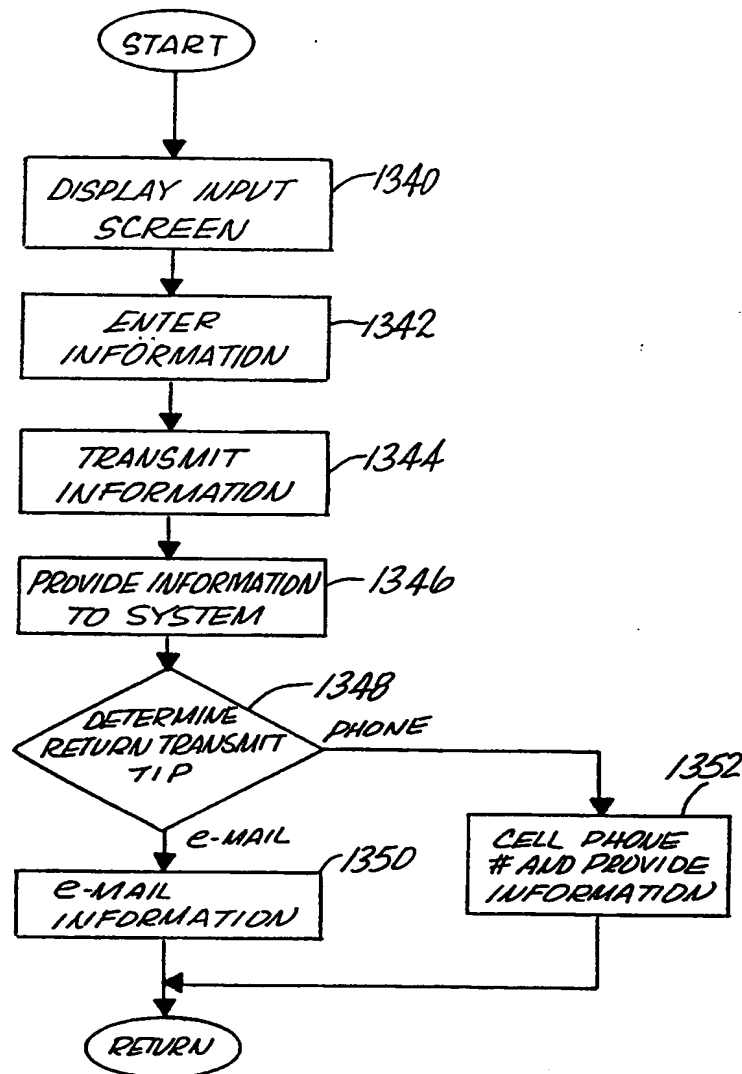
*Fig. 45*

Fig. 46


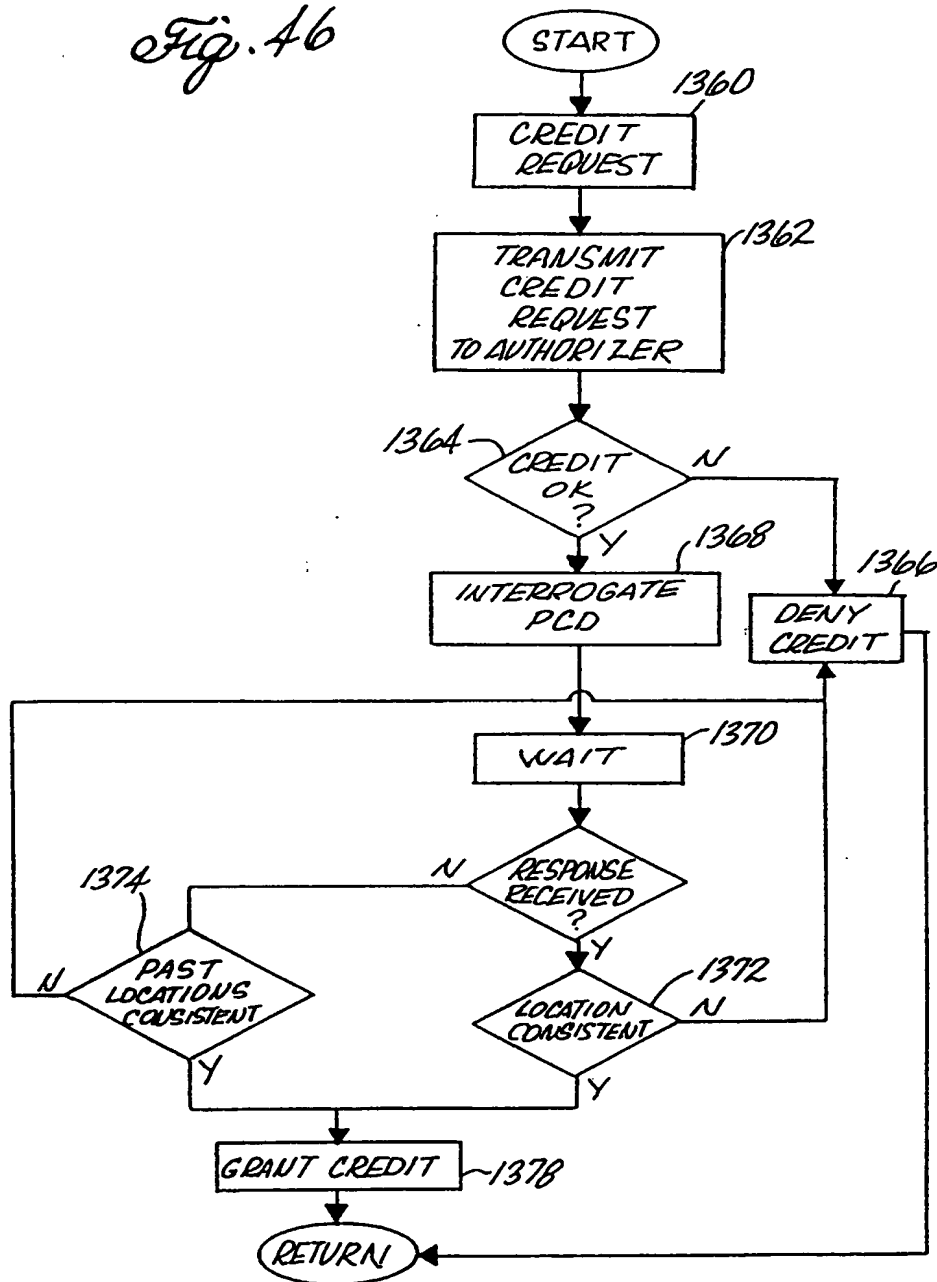


Fig. 47

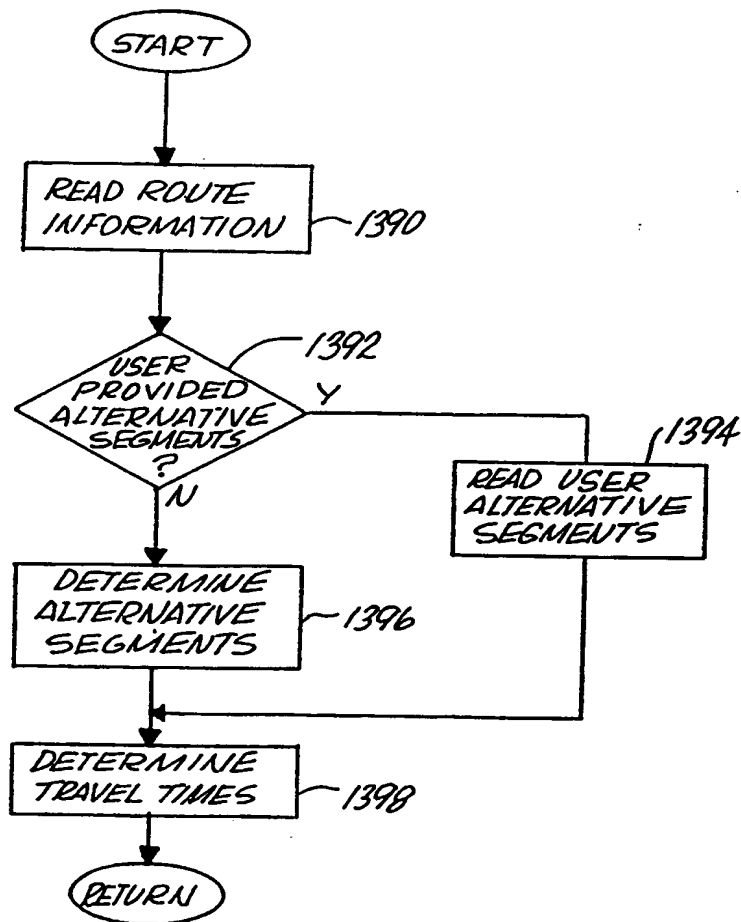

# TRAFFIC 1

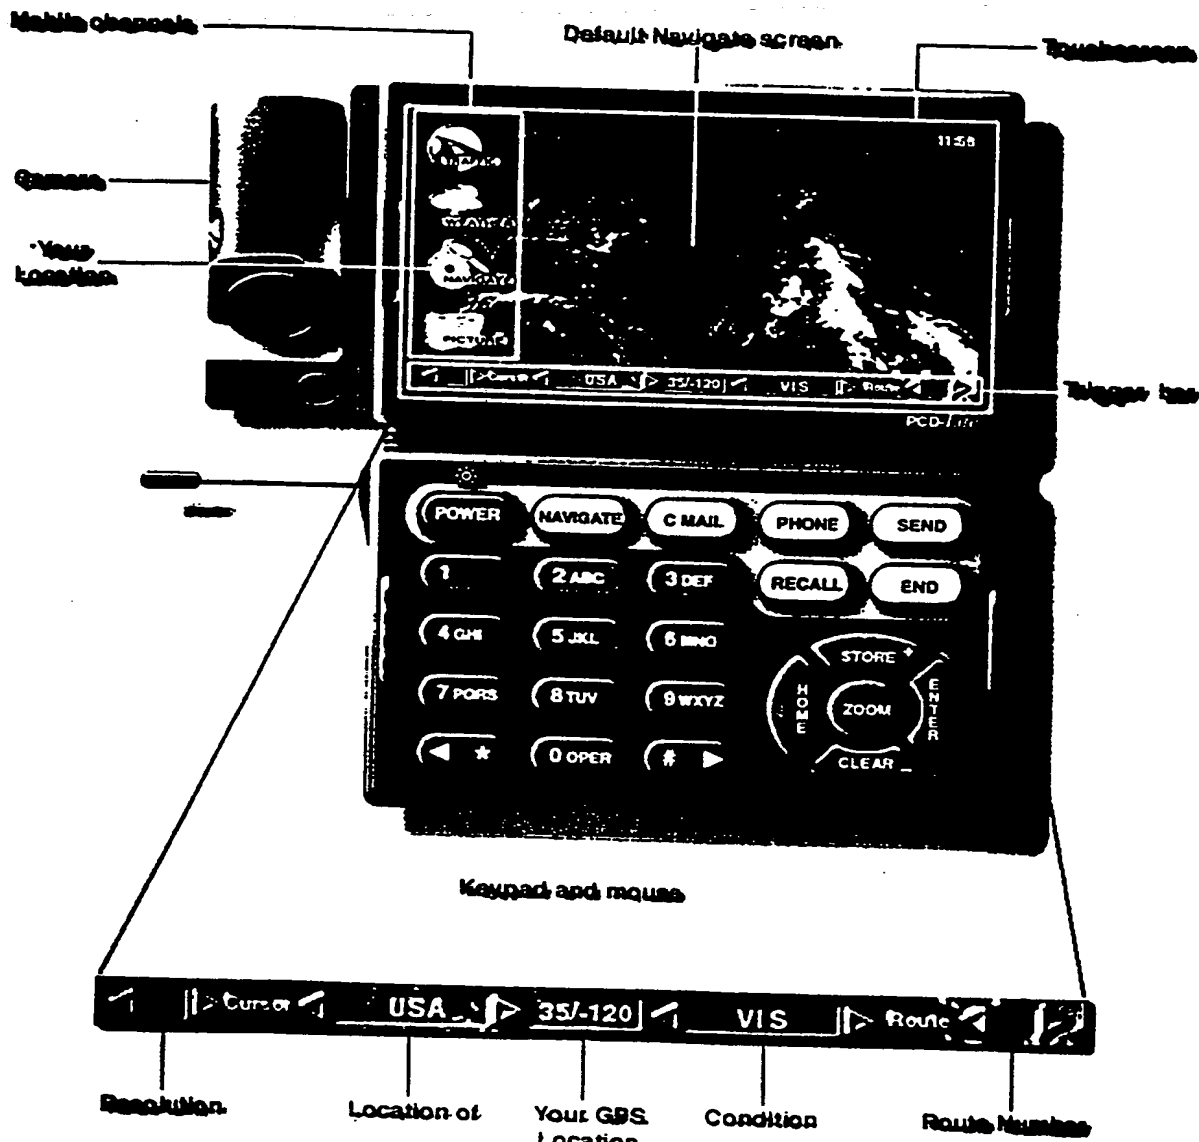


FIG 48A

# TRAFFIC 2

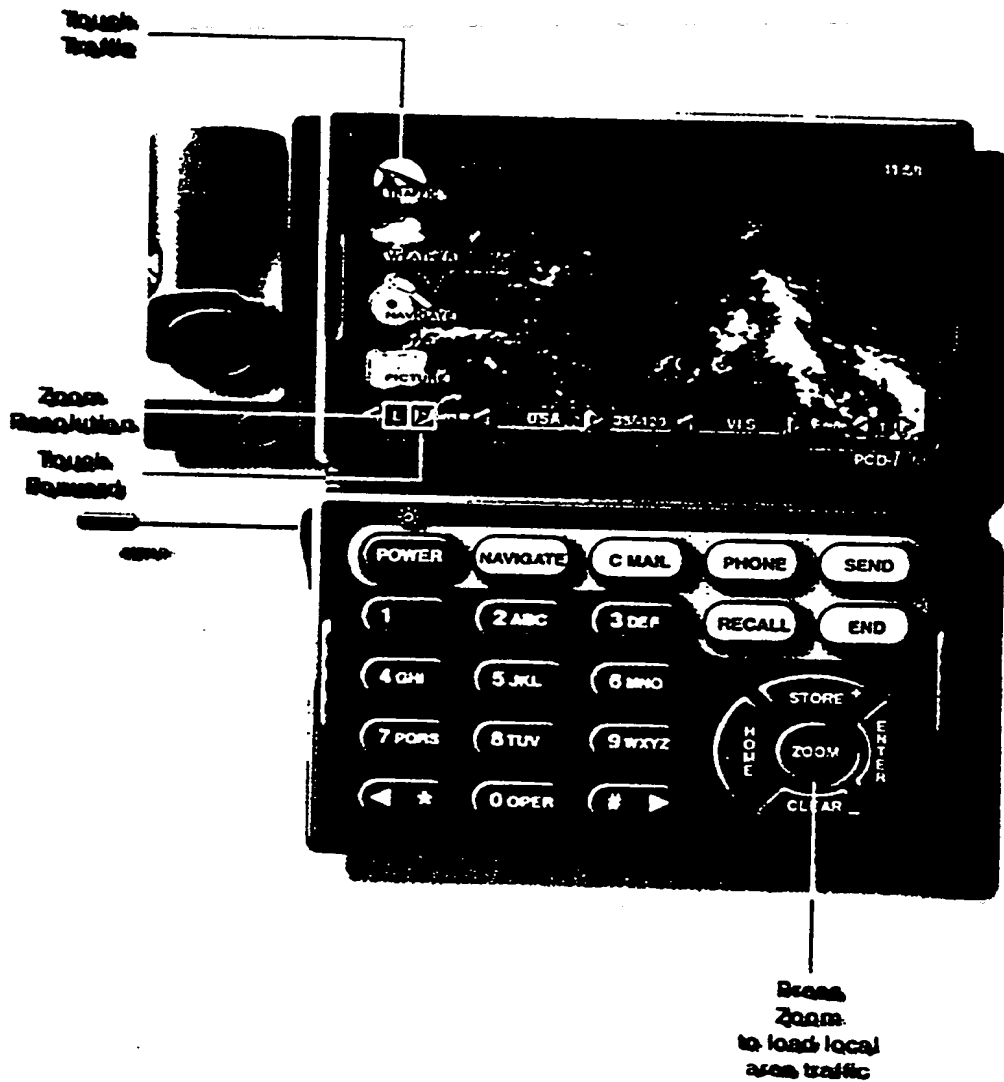


FIG 48B


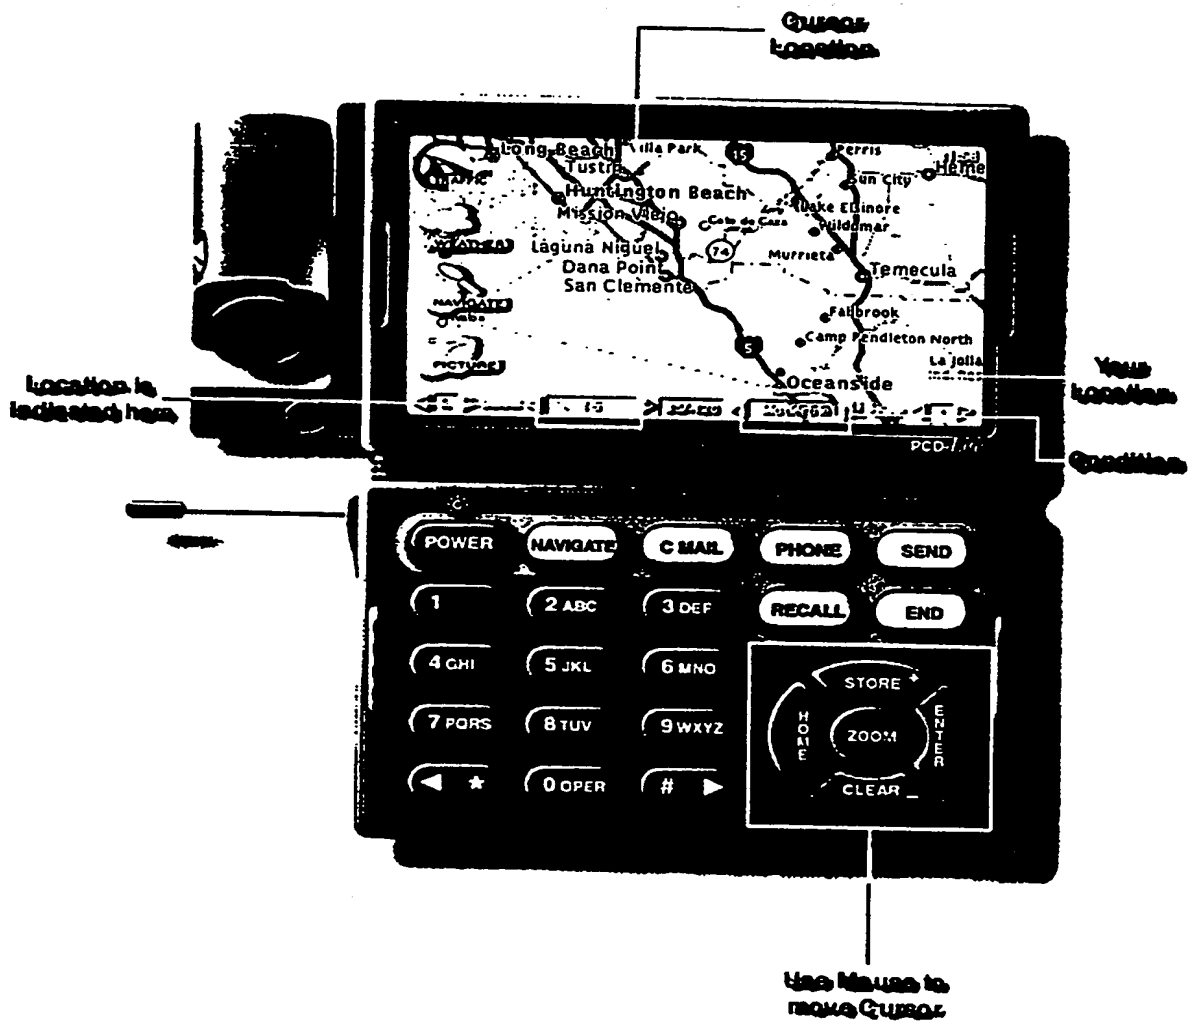
**TRAFFIC 3**

FIG 48 C

# TRAFFIC 4

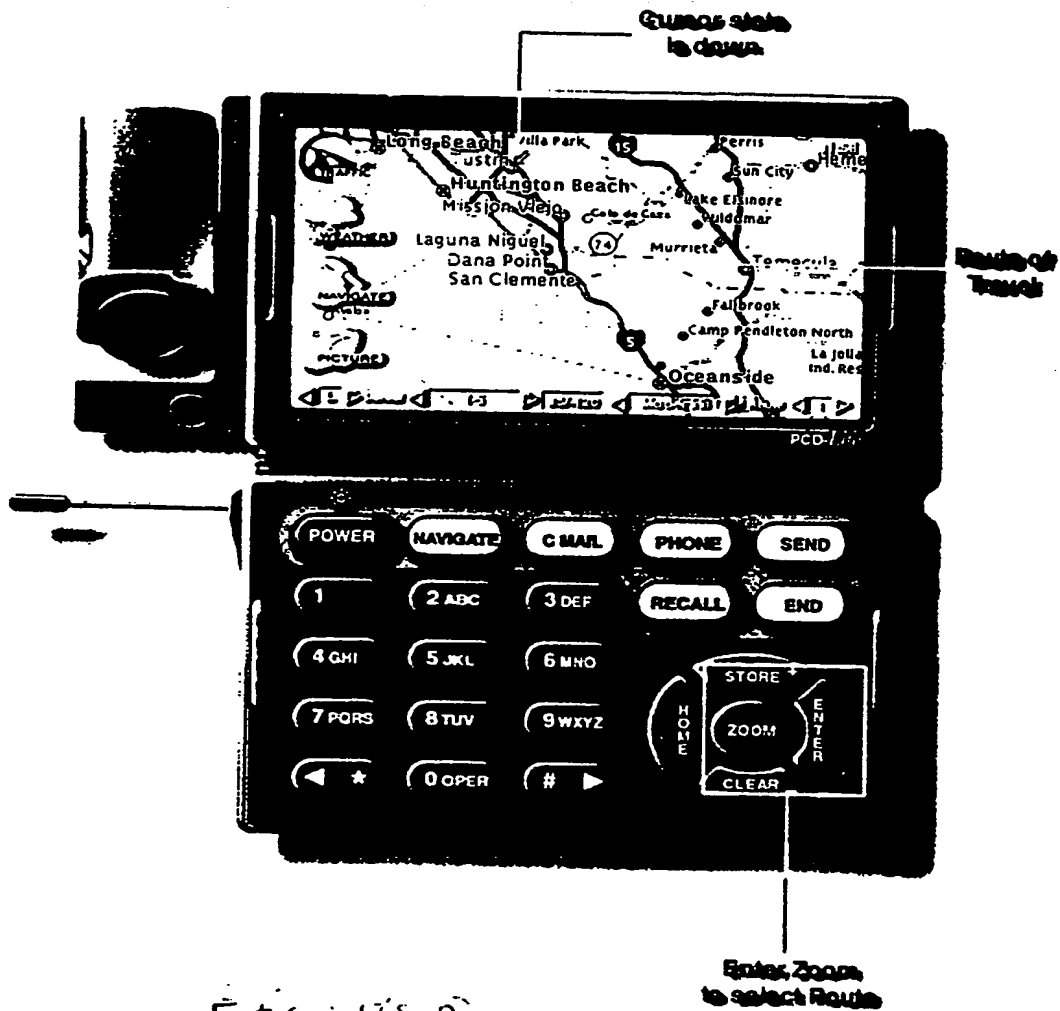

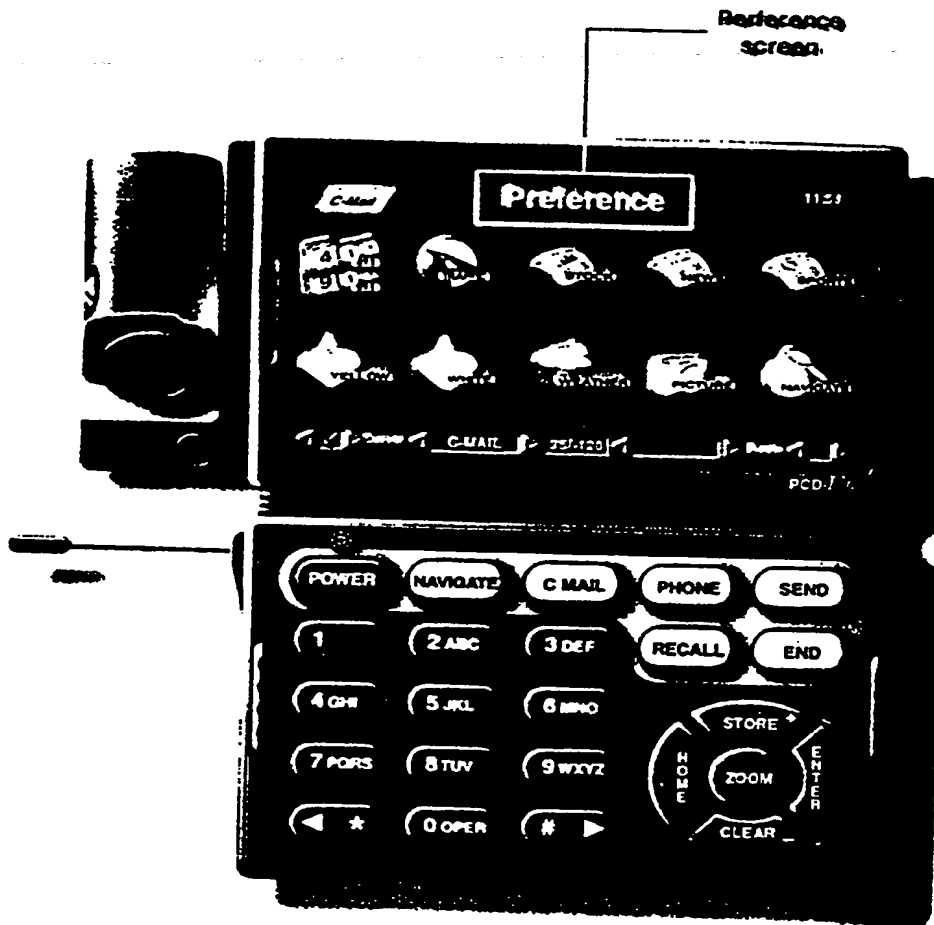
**C-Mail 3**


FIG 4a

**TRAFFIC 5**

FIG 48 E

**TRAFFIC 8**

F±G 48 F

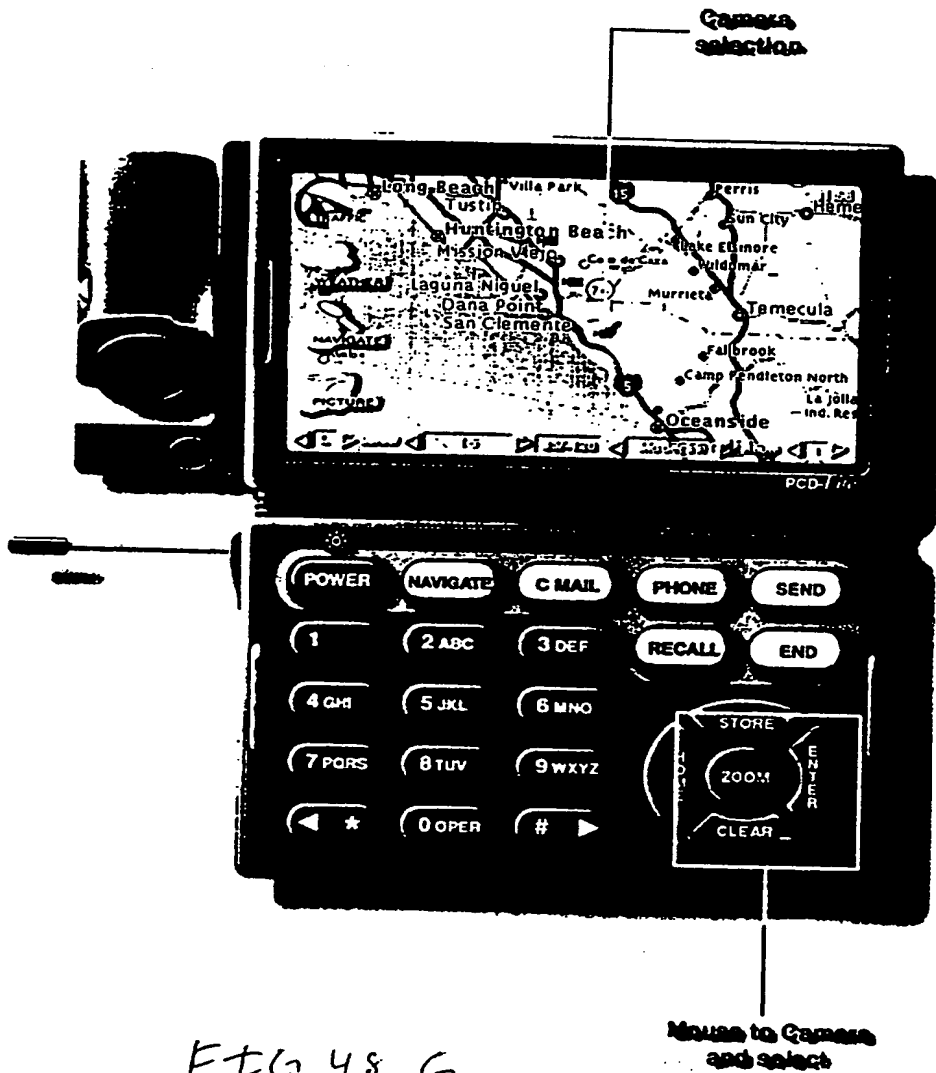**TRAFFIC 7**

# TRAFFIC 8


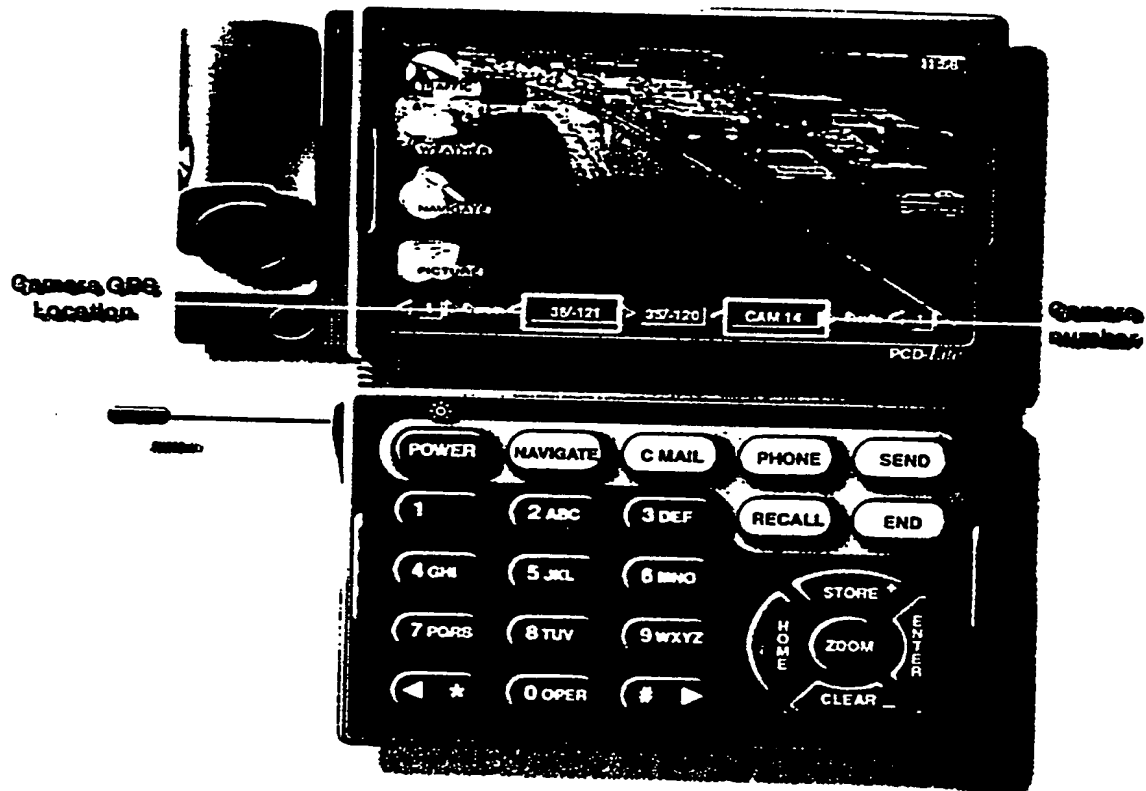


FIG 48 4

To ~~C-Mail~~  
from Navigate screen

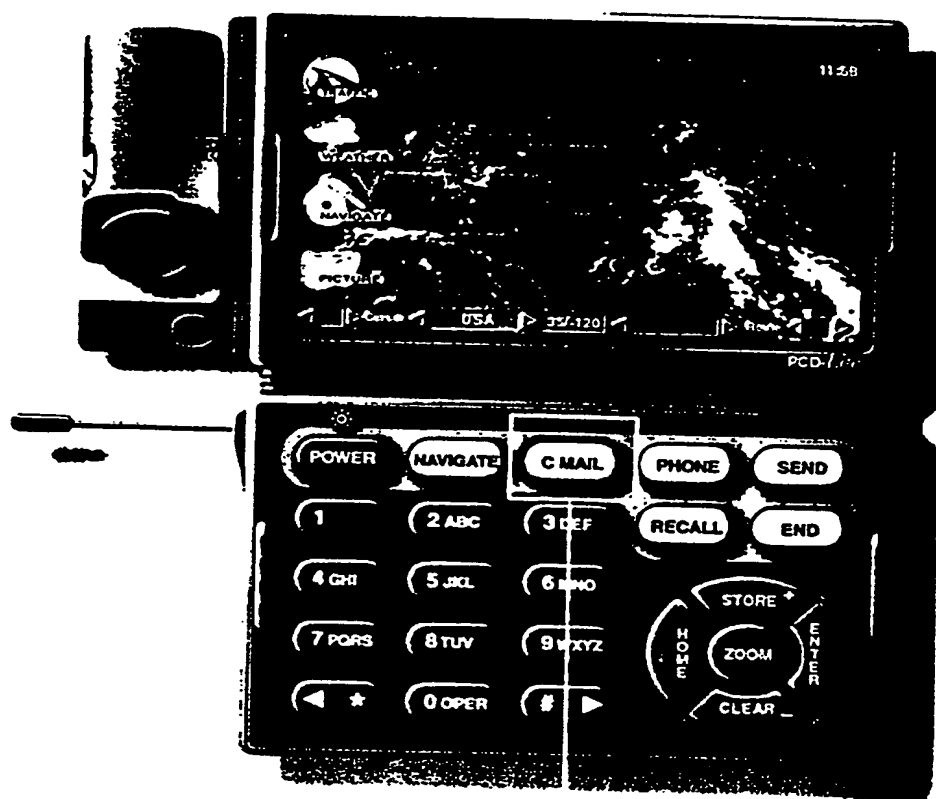

Press C-MAIL

FIG 49 A

# C-Mail 1


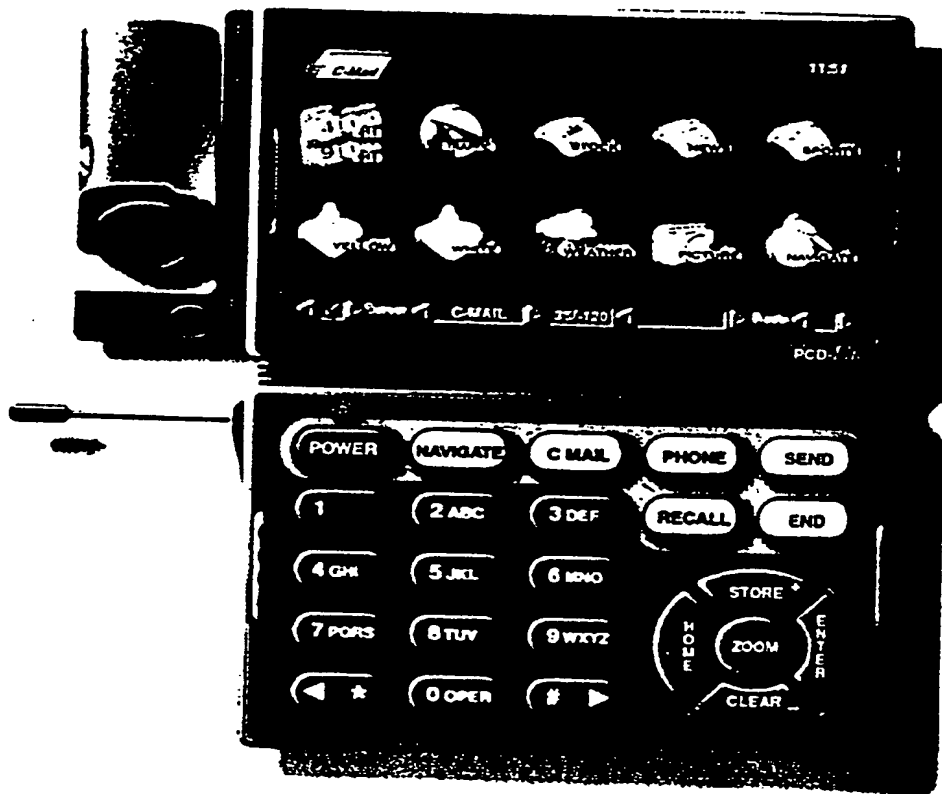


FIG 476

# **G-Mail 2**

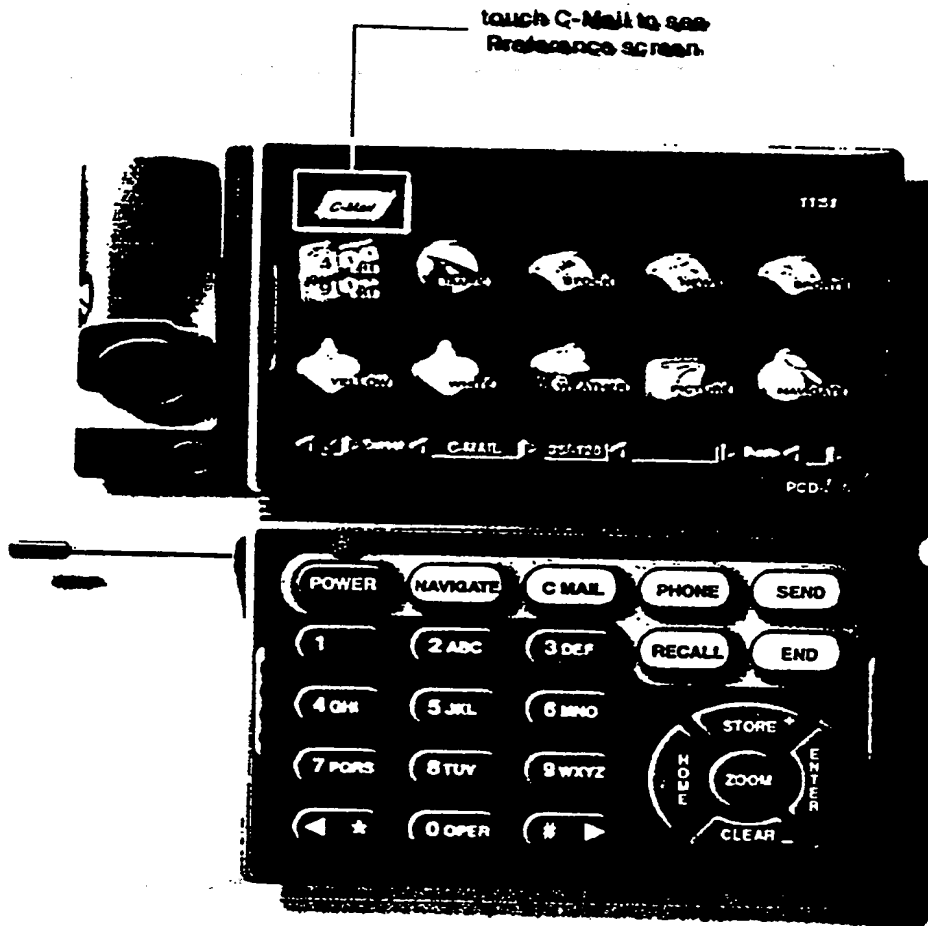

Ft G 44 C


**C-Mail 4**

FIG 4E


**C-Mail 6**

FIG 4A G

**C-Mail 5**

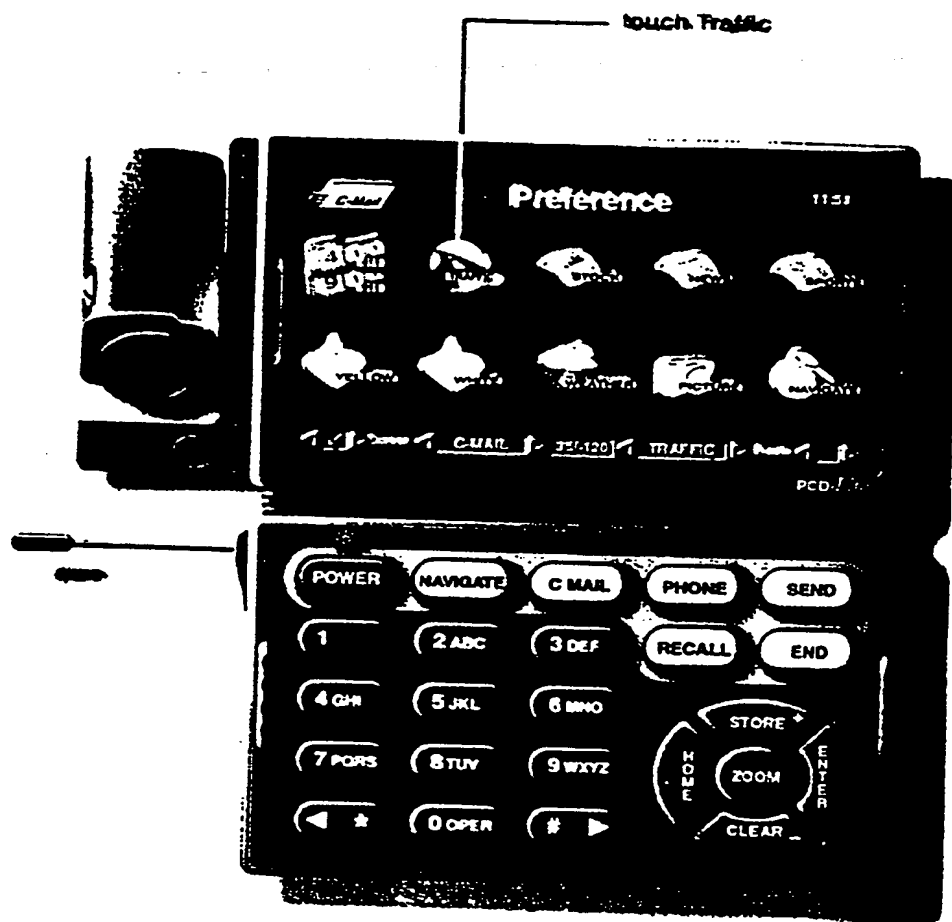

F-16 43 =

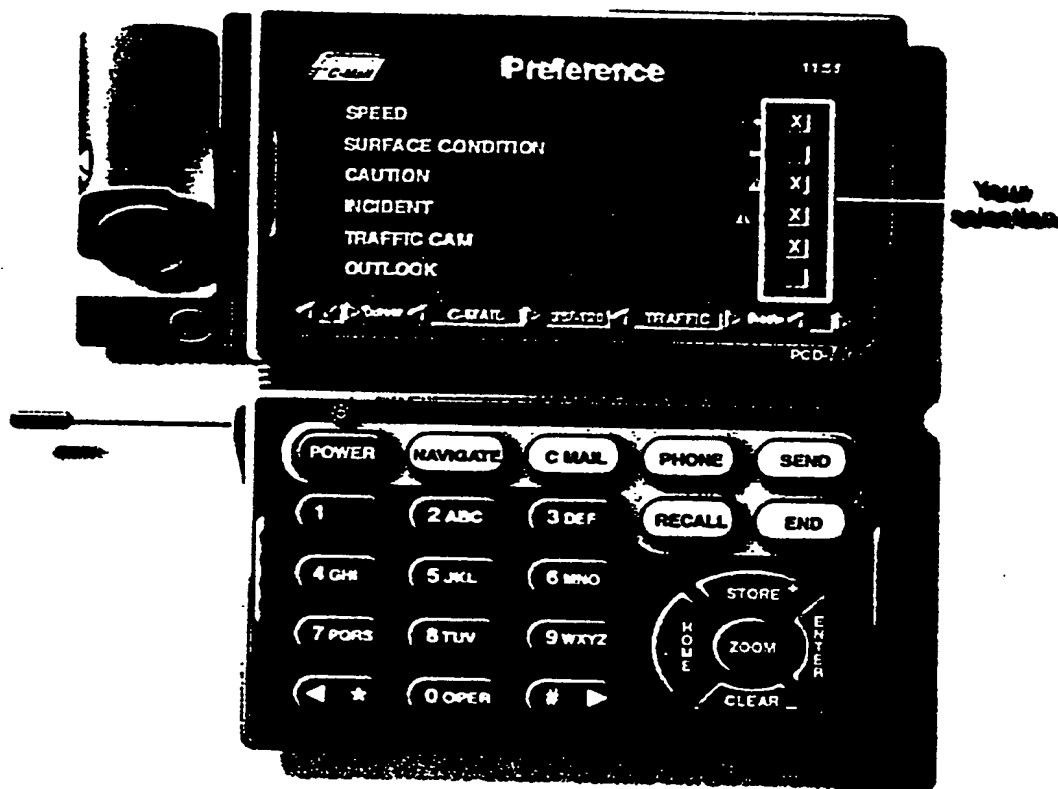**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☒ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☒ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**